


Lesson3 of Building:bit Mechanical Clip---“micro:bit handle remote control”

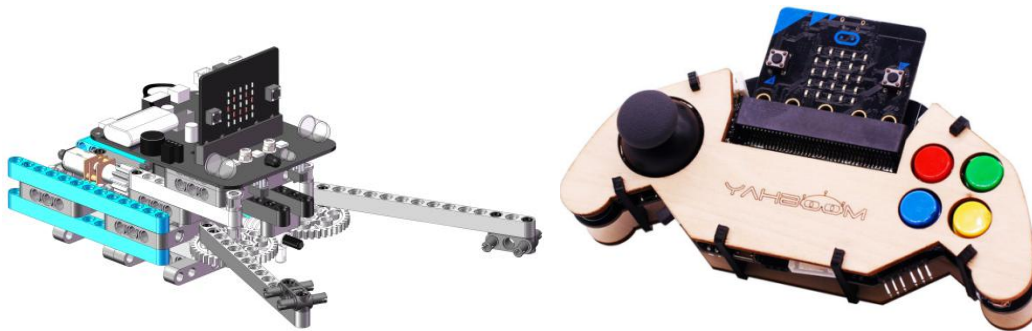

1.Experimental phenomena

After downloading the program, open the power switch of the Mechanical Clip and the power switch of the micro:bit handle, they will be automatically paired. When you press the micro:bit handle remote control button, the Mechanical Clip will have the corresponding action. The button on the right side of the remote control is used to control the color of the lights, and pressing the joystick down to turn off the light. Pushing the rocker forward,backward is to control the Clip open and close.

2.Preparation before class

We needs to be ready:

Building Block Mechanical Clip *1

micro:bit handle *1

USB data cable *1

2-1.Two programming methods:


Online programming:

First,we need to connect the micro:bit to the computer by USB data cable, the computer will pop up a USB flash drive.Then, click on the URL in the USB flash drive: <http://microbit.org/> to enter the edit process interface, click to

【Extensions】 , and copy the package URL:

https://github.com/lzty634158/yahboom_mbit_en to the input field, and you can use the building blocks of the Yahboom software package.







Offilne programming:








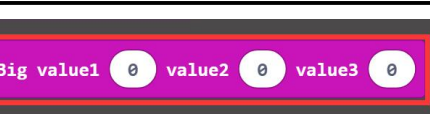
Open the offline programming software [Makecode](#) , click to 【Extension】 and copy the package URL: https://github.com/lzty634158/yahboom_mbit_en to the input field, and you can use the building blocks of the Yahboom software package.

For detailed programming, please read the documentation before class 【1. Preparation before class】 ---- 【Introduction of programming method】 . We use micro:bit official website for online programming in here.

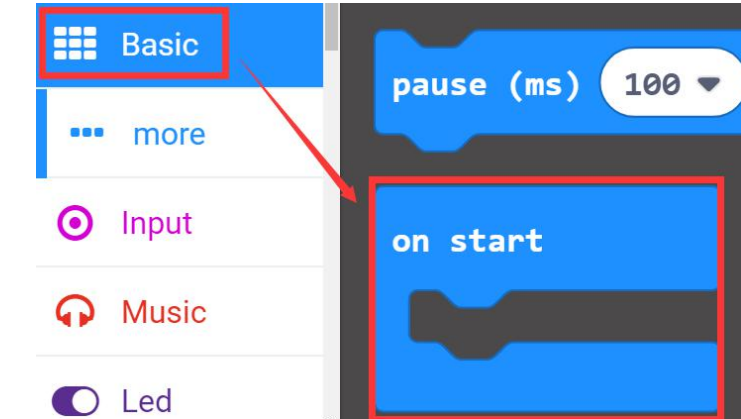3.Studying blocks

Blocks	Instruction
	Display image on the lattice of micro:bit.
	Set radio transmit power
	Executed at boot time, the code is only executed once.
	Set the radio channel group, the receiving and sending must be in the same group.
	The code inside is executed when radio receives data.
	Set a variable we need.


<p>New variable name:</p> <div> <input type="text" value="item"/> </div> <div> <div>Ok ✓</div> <div>Cancel ✕</div> </div>	<p>New variable name.</p>
	<p>Assign the received data to the variable item.</p>
	<p>If it is true then execute. If it is false, it will not be executed.</p>
	<p>The program pauses for 100 milliseconds and the time can be modified by yourself.</p>

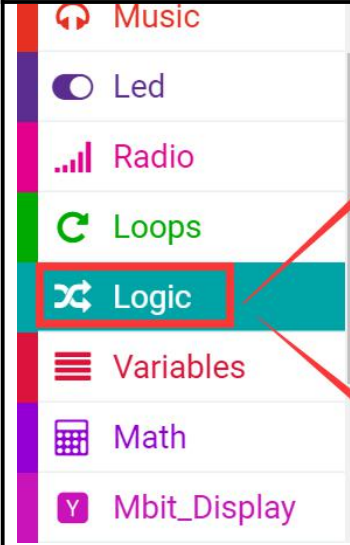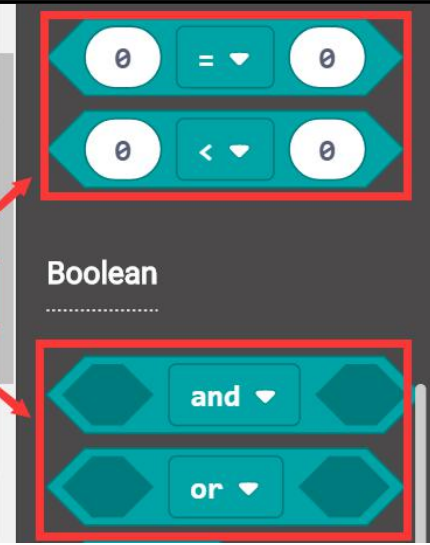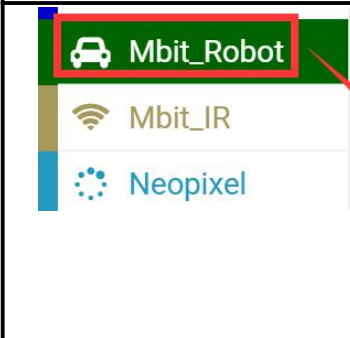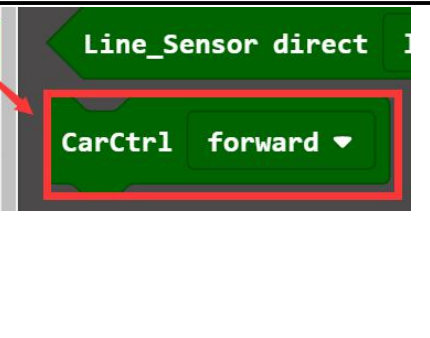		<p>Compare the two, if they are the same, they return 0, and if they are different, they return 1.</p>
		<p>The car control forward represents the motor rotates in the positive direction and the car control back represents and the motor rotates in the opposite direction.</p>
		<p>Select the color of the lights. 255 is the brightest.</p>



4.Programming


Mechanical Clip program:

Next, we started to write the program for the building block Mechanical Clip. After the writing, we need to download the program to the micro:bit board of the building block Mechanical Clip.

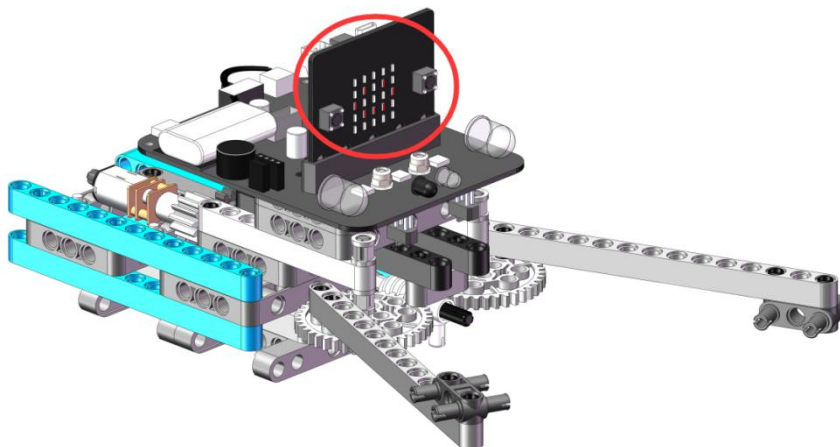


The program is shown below:

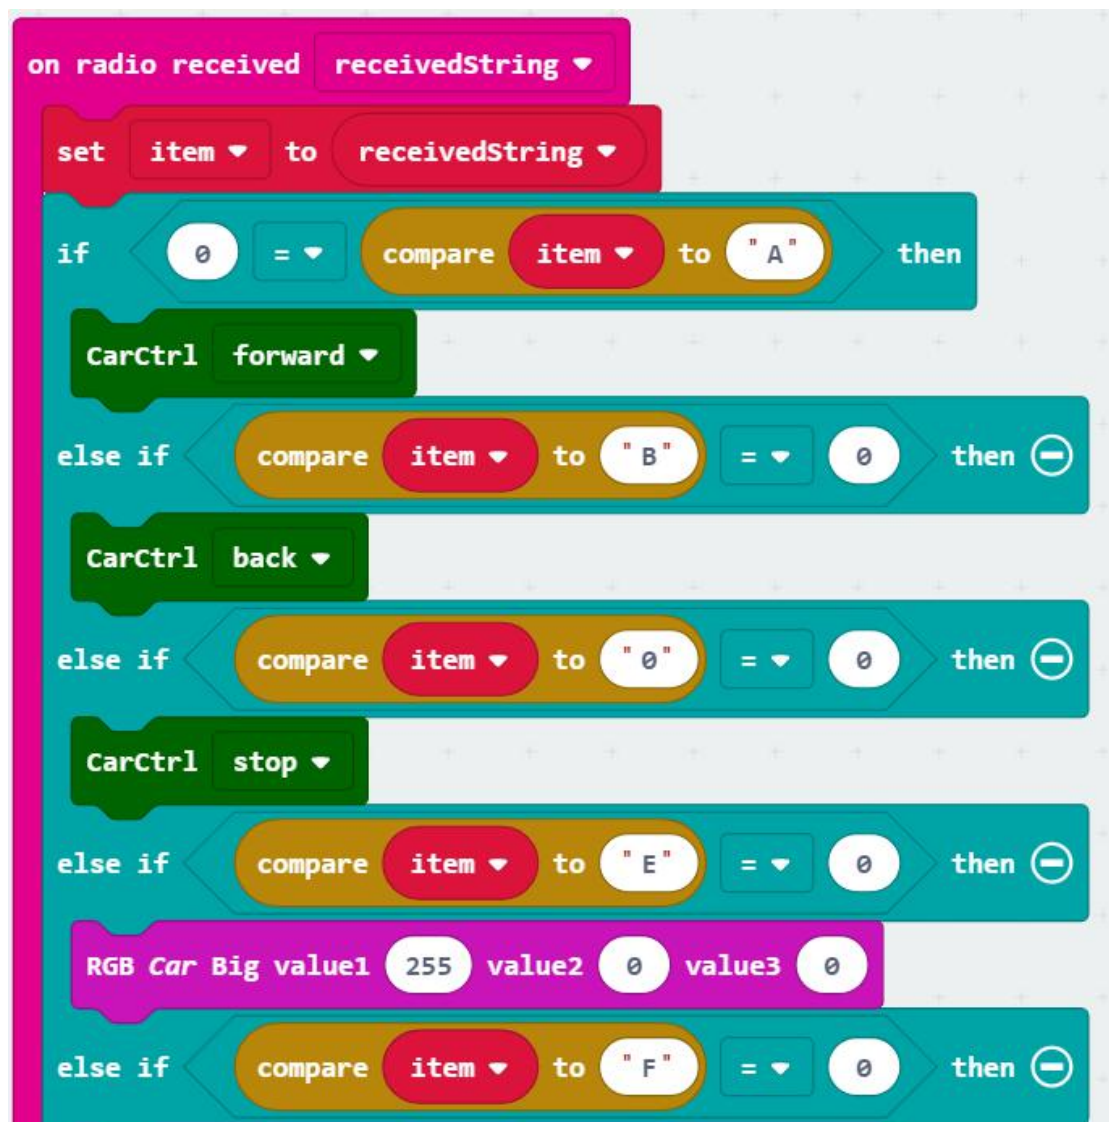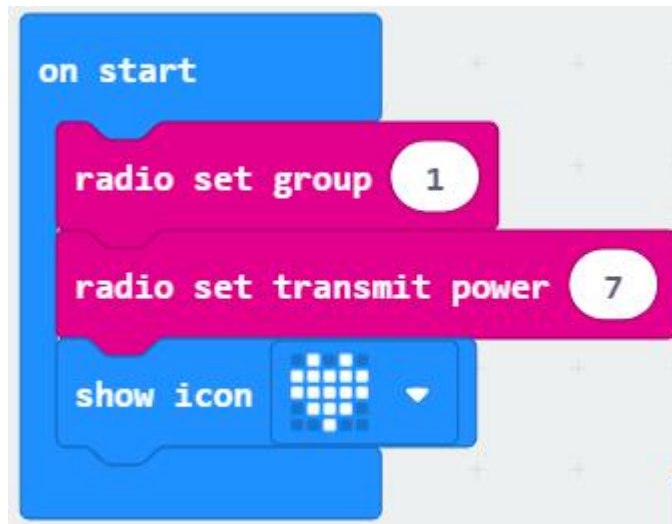

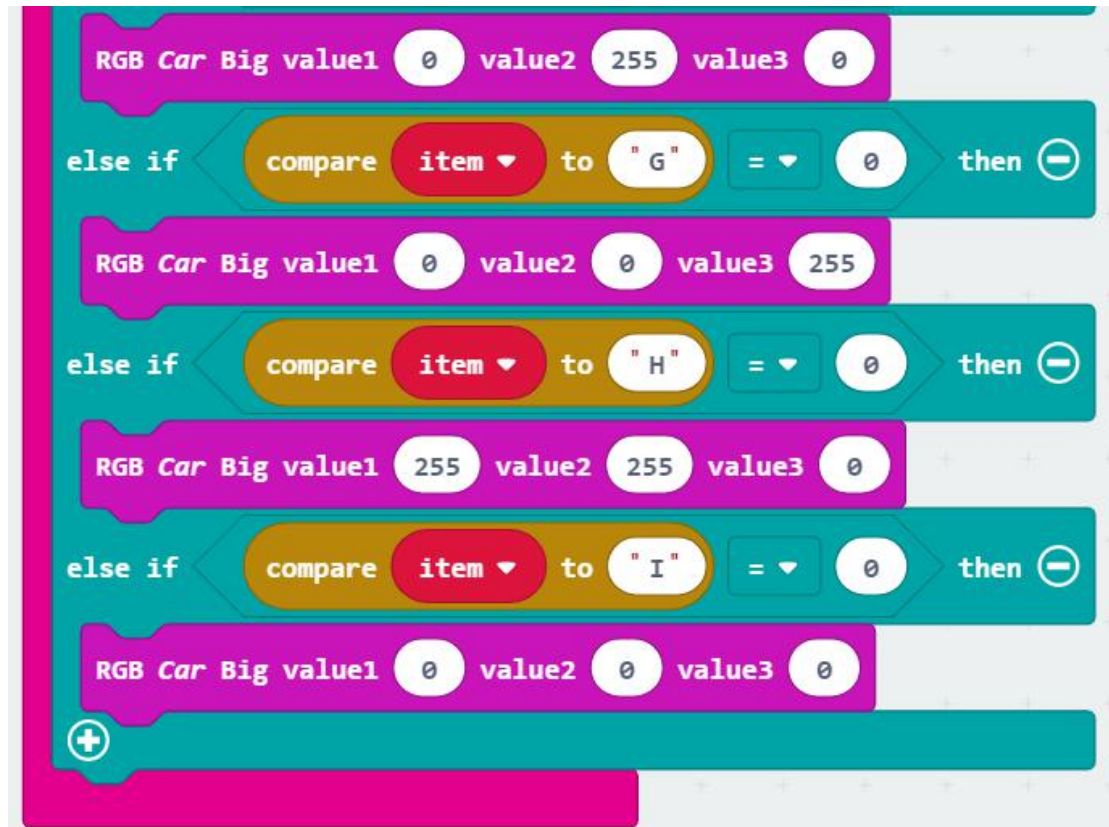

Handle joystick control program:

After adding the <https://github.com/lzty634158/GHBit> package, we can see the Yahboom handle blocks in the left side of the building block, as shown below:

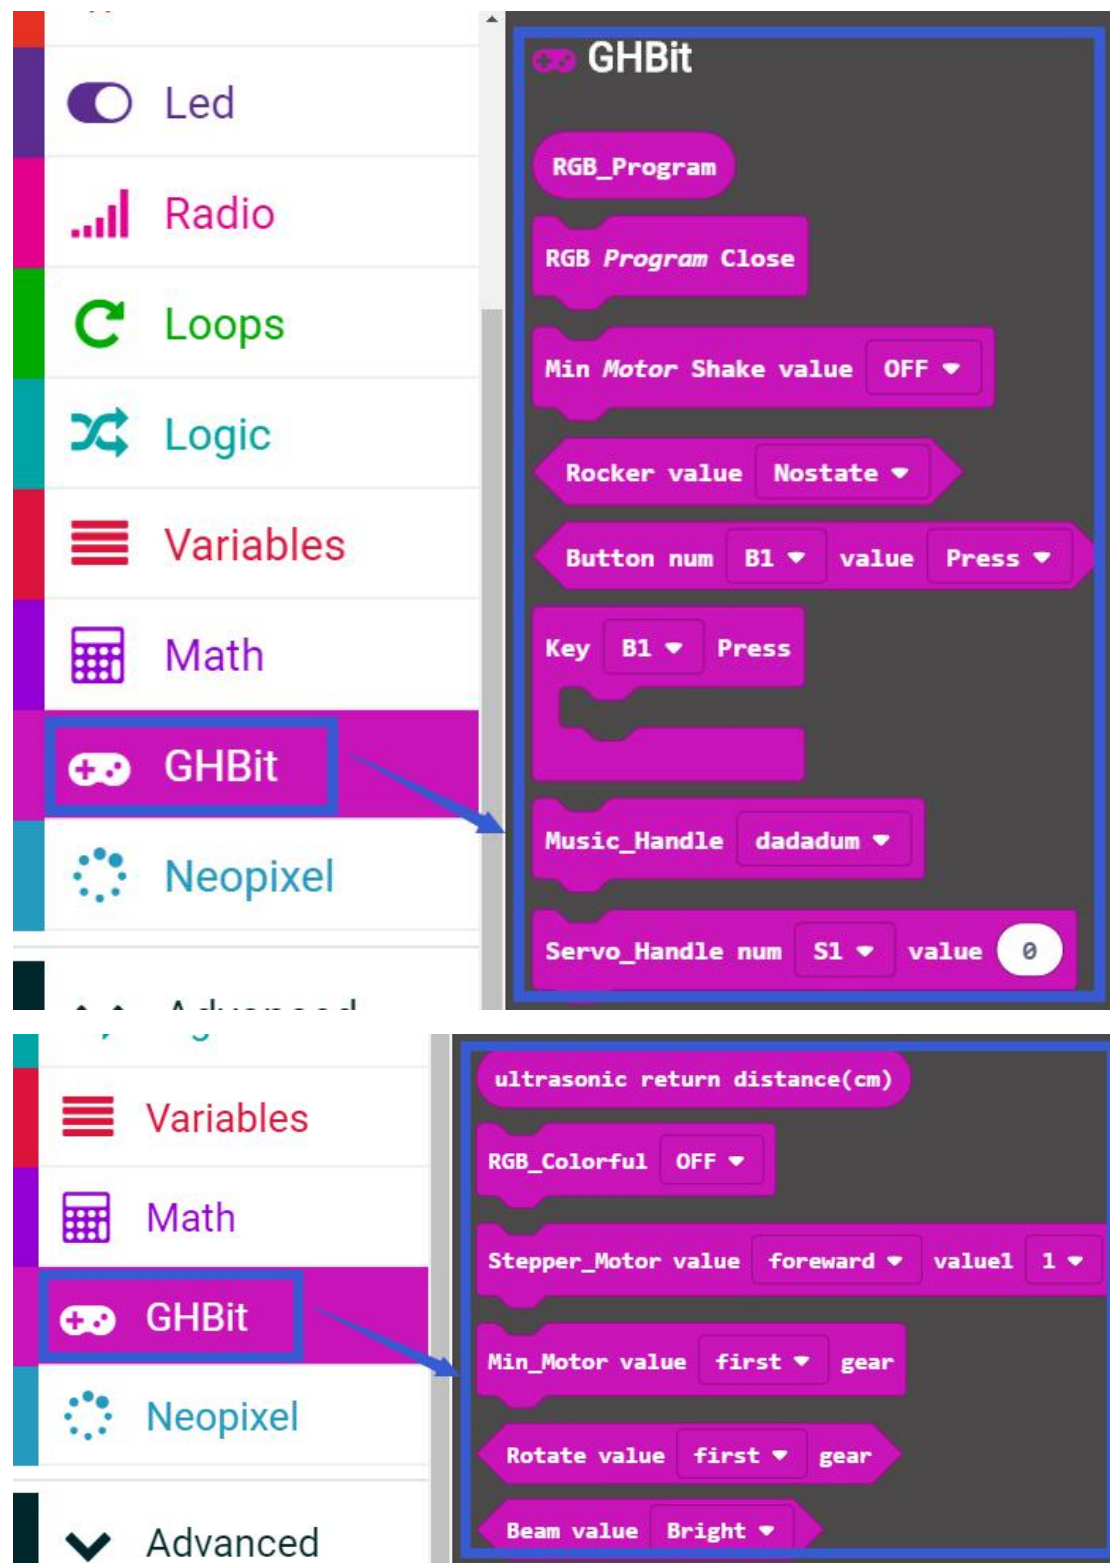


Next, we started to write the joystick control program. After writing, we need to

download the program to the micro:bit board of the handle.




The program is shown below:

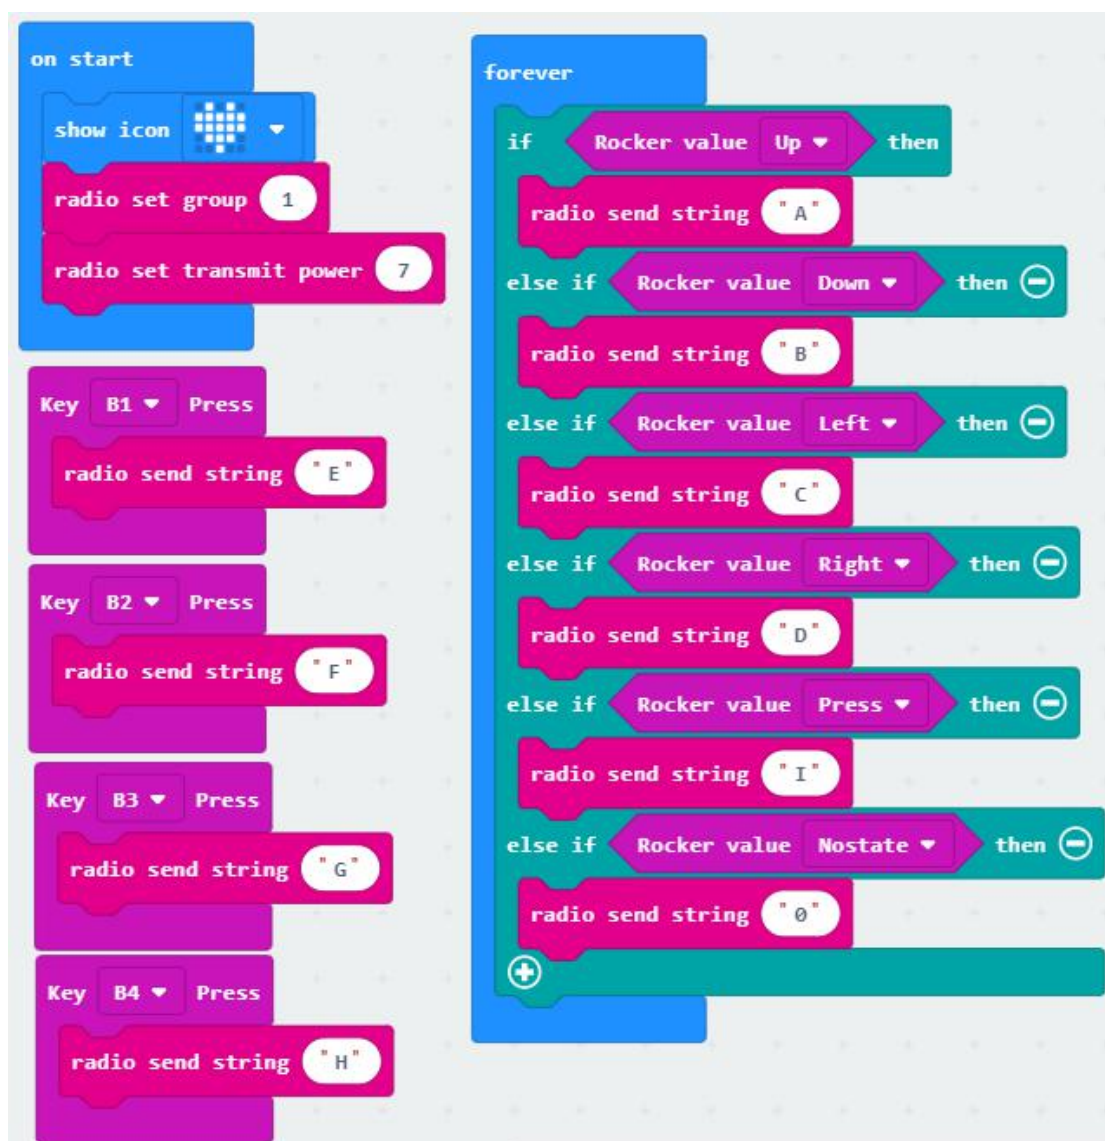

We also offer another way to control the Mini car, that is Handle gravity sensing control.

Handle gravity sensing control program is shown below:

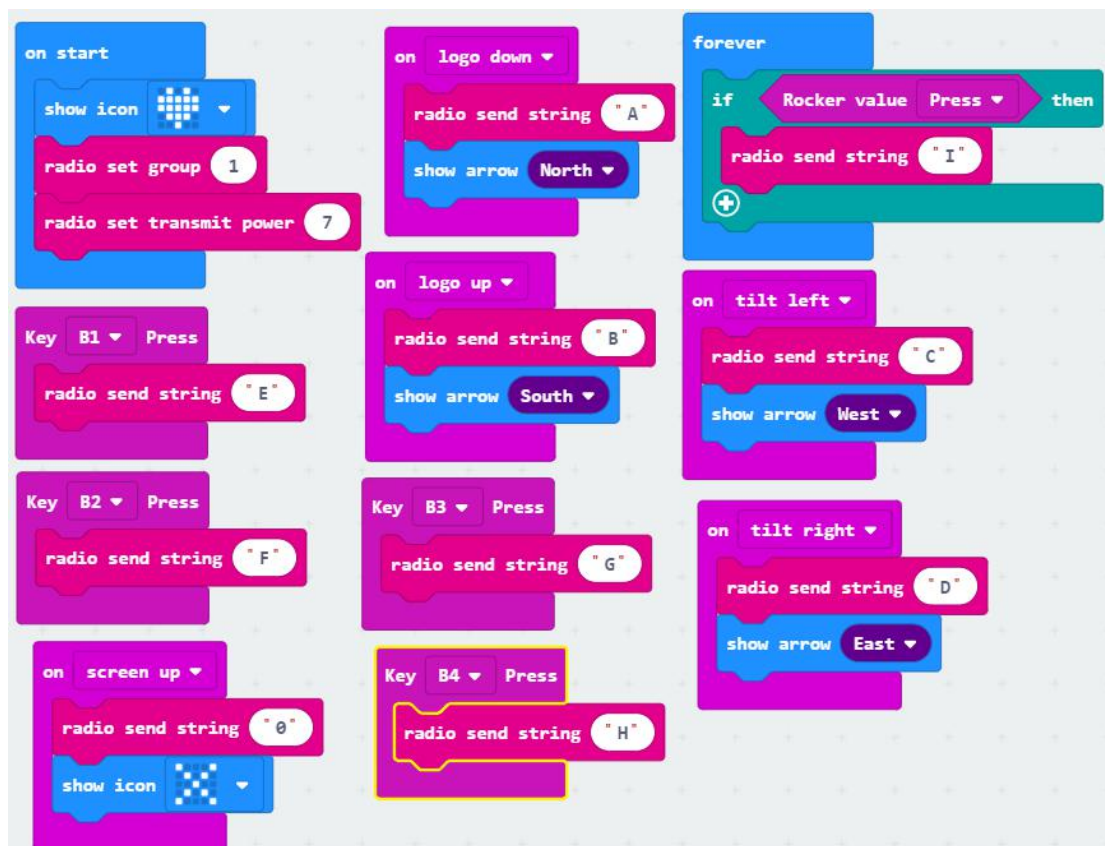

The above three programs, which we have provided. They are in the course directory.

If you want to use the program we provide directly, Please read the following carefully:

1. You should download the [Mechanical-Clip-program.hex](#) in the [Mechanical Clip code](#) folder to the micro:bit board of the Mechanical Clip.
2. You should download the [Handle-rocker-program.hex](#) in the [bit handle code](#) folder to the micro:bit board of the handle.
3. If you want to use the handle gravity sensing to control the Mechanical Clip, you should download the [Handle-gravity-sensing-program.hex](#) in the [bit handle code](#) folder to the micro:bit board of the handle.

After the program is downloaded, the handle and the car are powered up normally, they will be automatically paired, the two micro:bit board LED dots will show a heart on it, you can start to control.