

OpenClaw WebChat Interaction

OpenClaw WebChat Interaction

Access directly via VNC

Accessing from Other Hosts on the Local Network

1. Modify the OpenClaw configuration file to allow other devices on the intranet to access OpenClaw
2. Start the Gateway
3. Retrieve the Access Token
4. Establish an SSH Tunnel and Access via PC

Access directly via VNC

Note that on the Jetson Nano motherboard, because OpenClaw runs in Docker, special handling is required when interacting with WebChat. For details, please see Part 2,

Accessing from Other Hosts on the Local Network

First, connect to the host's terminal and enter the following command (for non-Docker versions, the gateway may start automatically at boot and does not need to be manually started; for Docker versions, it must be manually started):

```
openc1aw gateway
```

Next, we need to obtain the OpenClaw access token. In another terminal, enter the following command:

```
openc1aw dashboard
```

This command displays the token once, or you can find the `~/ .openc1aw/openc1aw\ .json` file, where your token will be configured.

```
root@jetson-yahboom:~/# openc1aw dashboard
👋 OpenClaw 2026.3.8 (3caab92) - Give me a workspace and I'll give you fewer tabs, fewer toggles, and more oxygen.
Dashboard URL: http://127.0.0.1:18789/#token=78
Copy to clipboard unavailable.
No GUI detected. Open from your computer:
ssh -N -L 18789:127.0.0.1:18789 user@<host>
Then open:
http://localhost:18789/
http://localhost:18789/#token=78
Docs:
https://docs.openc1aw.ai/gateway/remote
https://docs.openc1aw.ai/web/control-ui
root@jetson-yahboom:~/#
```

We connect to the system where the motherboard is located via VNC, then open a browser and enter the link provided in the dashboard.

Accessing from Other Hosts on the Local Network

OpenClaw version 3.8 on Jetson After deploying OpenClaw within a Docker container on a Nano, accessing the OpenClaw Control UI (web console) via a browser on the local Jetson will result in a 4008 access error. Therefore, you need to access it from a different computer.

If no other computer is available, you can use OpenClaw's TUI tool, which can be used via command line in the terminal. See the TUI usage section below for details.


Note: Please use the latest version of Edge or Chrome browser. Other browsers may encounter a 4008 error.

1. Modify the OpenClaw configuration file to allow other devices on the intranet to access OpenClaw

```
openclaw config
```

Here, we select according to the following image (use the up and down arrow keys to select, and press Enter to confirm).

Except for the Token, which can be different from the one in the image, everything else must be the same. The key setting here is the "Gateway bind mode" option; we need to set it to "LAN" to allow other devices within our local network to access our OpenClaw instance.

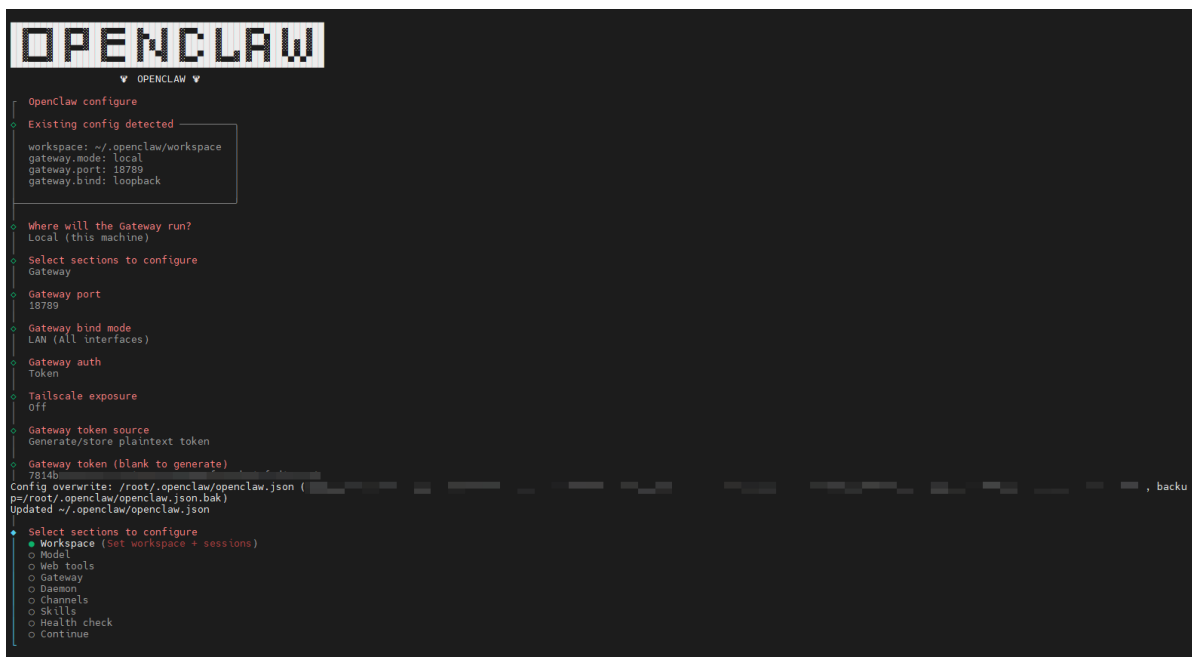

Finally, select "Continue" to confirm, press Enter, and the configuration is complete!



2. Start the Gateway

Once the configuration is complete, let's start the OpenClaw Gateway service. Open a new terminal window and enter the following command:

```
openclaw gateway
```

3. Retrieve the Access Token

The Token referred to here is the one generated during the configuration process we just completed. If you didn't write it down, you can use the following command:


```
openclaw dashboard
```

This command will display the token for you. Alternatively, you can locate the `~/openclaw/openclaw.json` file, where your token is stored within the configuration.

```
root@jetson-yahboom:/# openclaw dashboard
W OpenClaw 2026.3.8 (3caab92) - Give me a workspace and I'll give you fewer tabs, fewer toggles, and more oxygen.
Dashboard URL: http://127.0.0.1:18789/#token=78
Copy to clipboard unavailable.
No GUI detected. Open from your computer:
ssh -N -L 18789:127.0.0.1:18789 user@<host>
Then open:
http://localhost:18789/
http://localhost:18789/#token=78
Docs:
https://docs.openclaw.ai/gateway/remote
https://docs.openclaw.ai/web/control-ui
root@jetson-yahboom:/#
```

4. Establish an SSH Tunnel and Access via PC

On a PC connected to the same local network, configure the connection environment to access the Jetson device. Open the Cmd terminal on your computer (using Windows as an example: press **Win+R** to launch the Run utility, type `cmd`, and then press **Enter**).



Enter the following command into the console:

```
ssh -L 18789:127.0.0.1:18789 jetson@<jetson-ip-address>
```

Note: You must replace `<jetson-ip-address>` with the actual IP address of your Jetson board.

After pressing **Enter**, you will be prompted to enter the password (the default password is `yahboom`).

```
jetson@jetson-yahboom: ~
Microsoft Windows [Version 10.0.26200.7840]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Administrator>ssh -L 18789:127.0.0.1:18789 jetson@192.168.2.56
jetson@192.168.2.56's password:
Welcome to Ubuntu 18.04.6 LTS (GNU/Linux 4.9.299-tegra aarch64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/advantage
This system has been minimized by removing packages and content that are
not required on a system that users do not log into.

To restore this content, you can run the 'unminimize' command.

219 updates can be applied immediately.
166 of these updates are standard security updates.
To see these additional updates run: apt list --upgradable

Last login: Tue Mar 10 12:27:26 2026 from 192.168.2.42
jetson@jetson-yahboom:~$
```

If this screen appears, it indicates that you have successfully connected to the Jetson.

Open a web browser on your PC and enter the full address—consisting of the IP and token—into the address bar (this is the address that was output by the `openclaw onboard` command earlier; e.g., `https://127.0.0.1:18789/#token=xxxxxxxxxxxxxx`). If the interface shown below appears, it confirms that the deployment was successful!

