


### Start up Jetson NANO


1. After the programming is completed, insert the SD card into the Jetson Nano.



2. Connect display screen and power supply to Jetson NANO 2G board.  
**5V-3A or 5V-4A Type-C power supply will be recommend.**

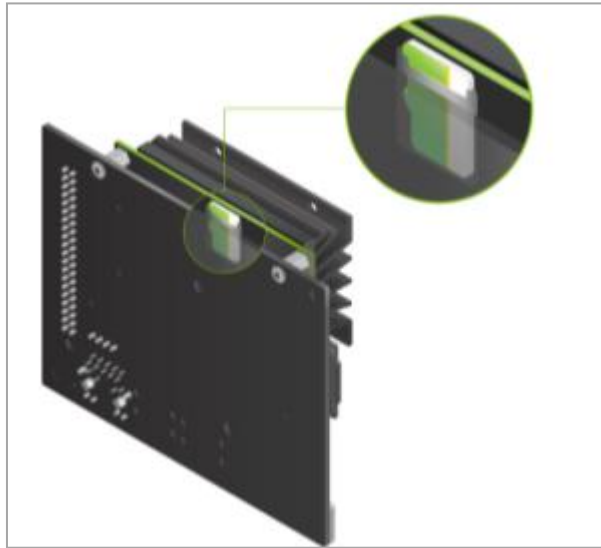

3. After power supply is on. We can see a green power light will keep on.

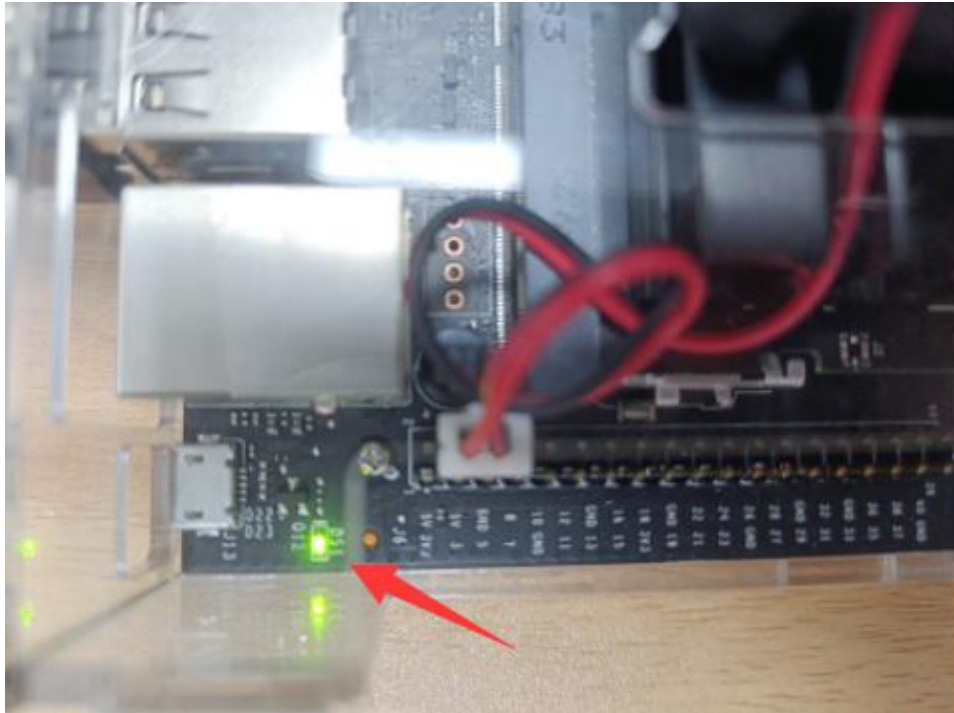

**!Note:**

The micro USB interface is only used in headless mode and cannot be used for power supply.

4. Connect display screen, mouse, keyboard and others.



5. After enter system, we can complete some setting, for example: Language, time,etc.

