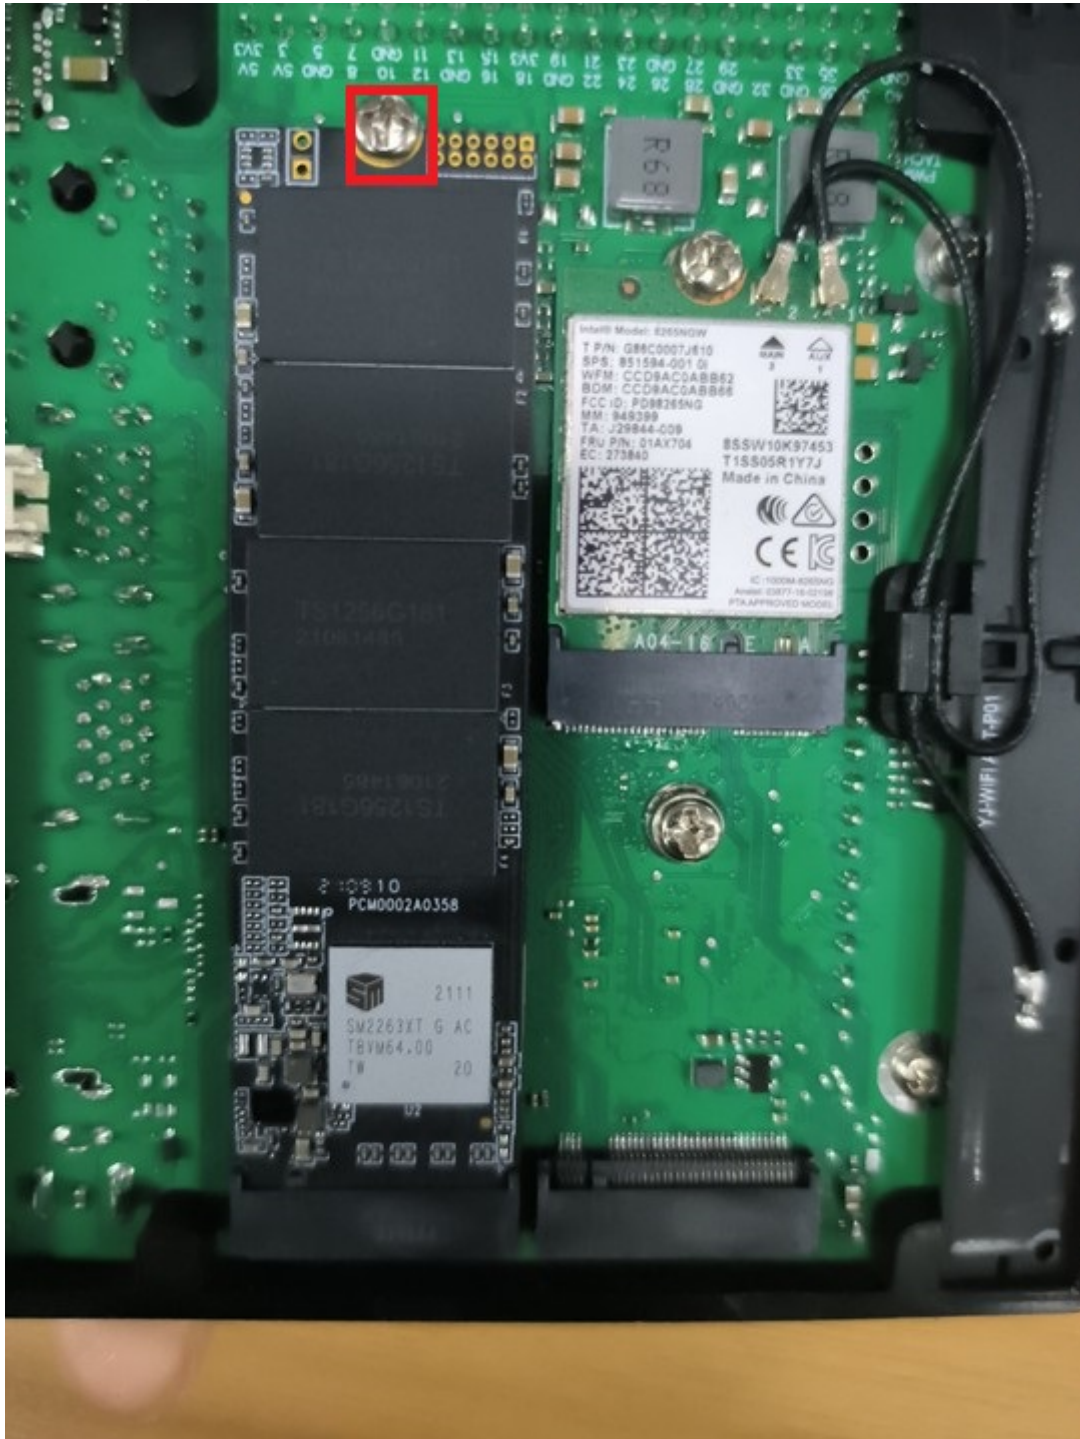# 1.Jetson Orin nano startup

1. Insert the burned image solid-state drive into the card slot of the motherboard's solid-state drive and tighten the screws of the card slot

2. Connect the power supply and HDMI cable to the monitor

3. We need to use the official 19V2.37A round head DC interface power supply to power the Orin nano board.

4. The official power supply is powered on without a switch, and you can see that the DS1 indicator light next to it is also on. When the system enters the desktop, the process will be

displayed on the screen.