

Chasing Frogs


Chasing Frogs

1. Experiment Purpose
2. Implementation Principle
3. Experiment Steps
4. Experiment Steps
5. Experiment Phenomenon


1. Experiment Purpose

In this section, we will use the Micro:bit angle sensor together with motor and buzzer control to achieve the "chasing frogs" effect.


2. Implementation Principle

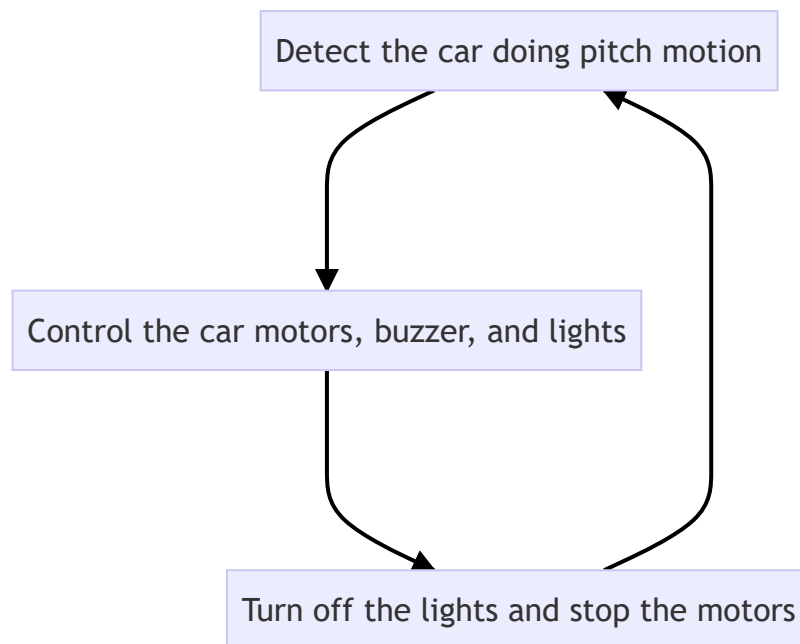

The program is as follows.

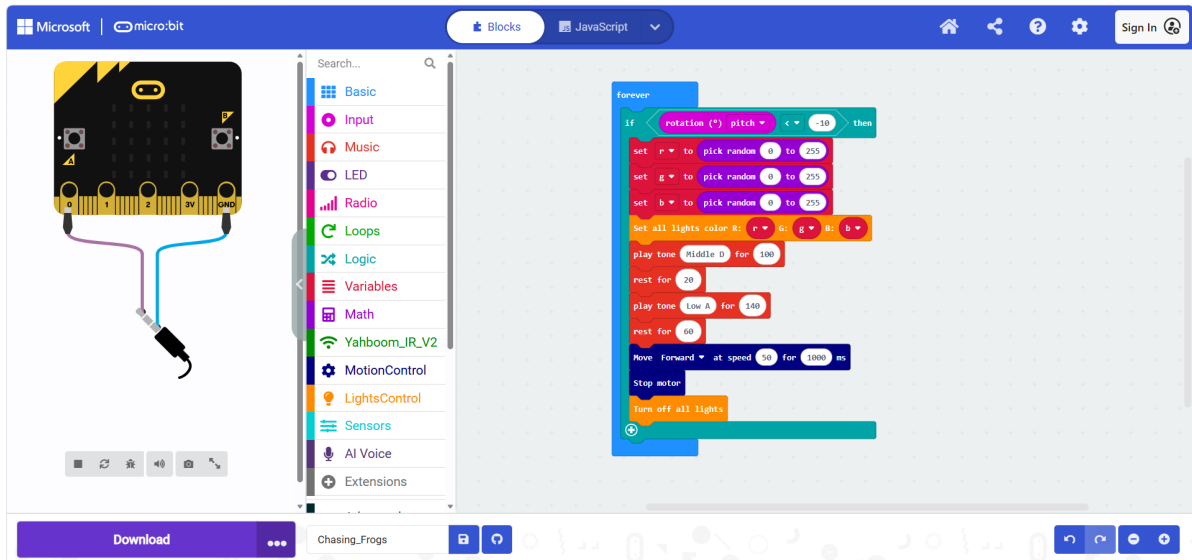

The random number block is located in the **Math** category.

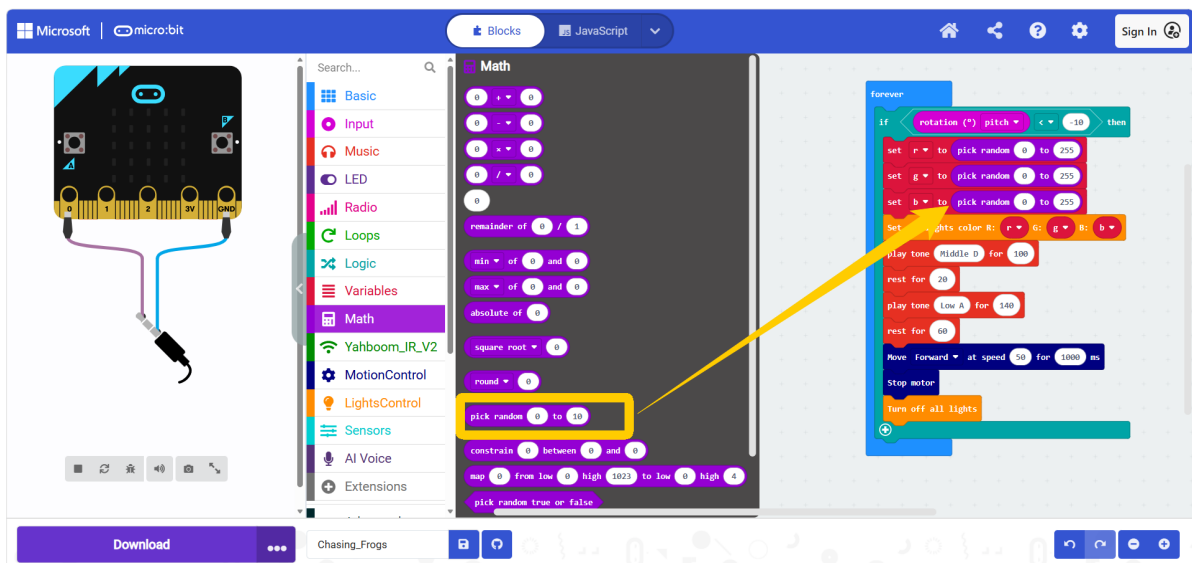

The positions of other blocks have already been introduced in previous tutorials, so we will not go into too much detail here.

4. Experiment Steps

1. Before flashing, turn off the car switch (switch it to OFF), and connect the Micro USB cable to the Micro:bit. Note: not the Charging interface on the expansion board.
2. Flash `11.Chasing_Frogs.hex` to the Micro:bit. For the flashing method, refer to section "4. Flashing Programs" in "2. Introduction to Graphic Programming"
3. Turn on the car switch (switch it to ON).

5. Experiment Phenomenon

The car will detect the current angle information of the car. Lift up the rear of the car, then release it. The car will turn on the headlights, move forward, and the buzzer will also make a sound to simulate the croaking of a frog. The angle threshold, tone, and beat parameters can be adjusted according to actual needs.

