


Thermometer Monitoring

Thermometer Monitoring


1. Experiment Purpose
2. Implementation Principle
4. Experiment Steps
5. Experiment Phenomenon

1. Experiment Purpose


In this section, we will use the temperature sensor together with light control to achieve the "thermometer monitoring" effect.

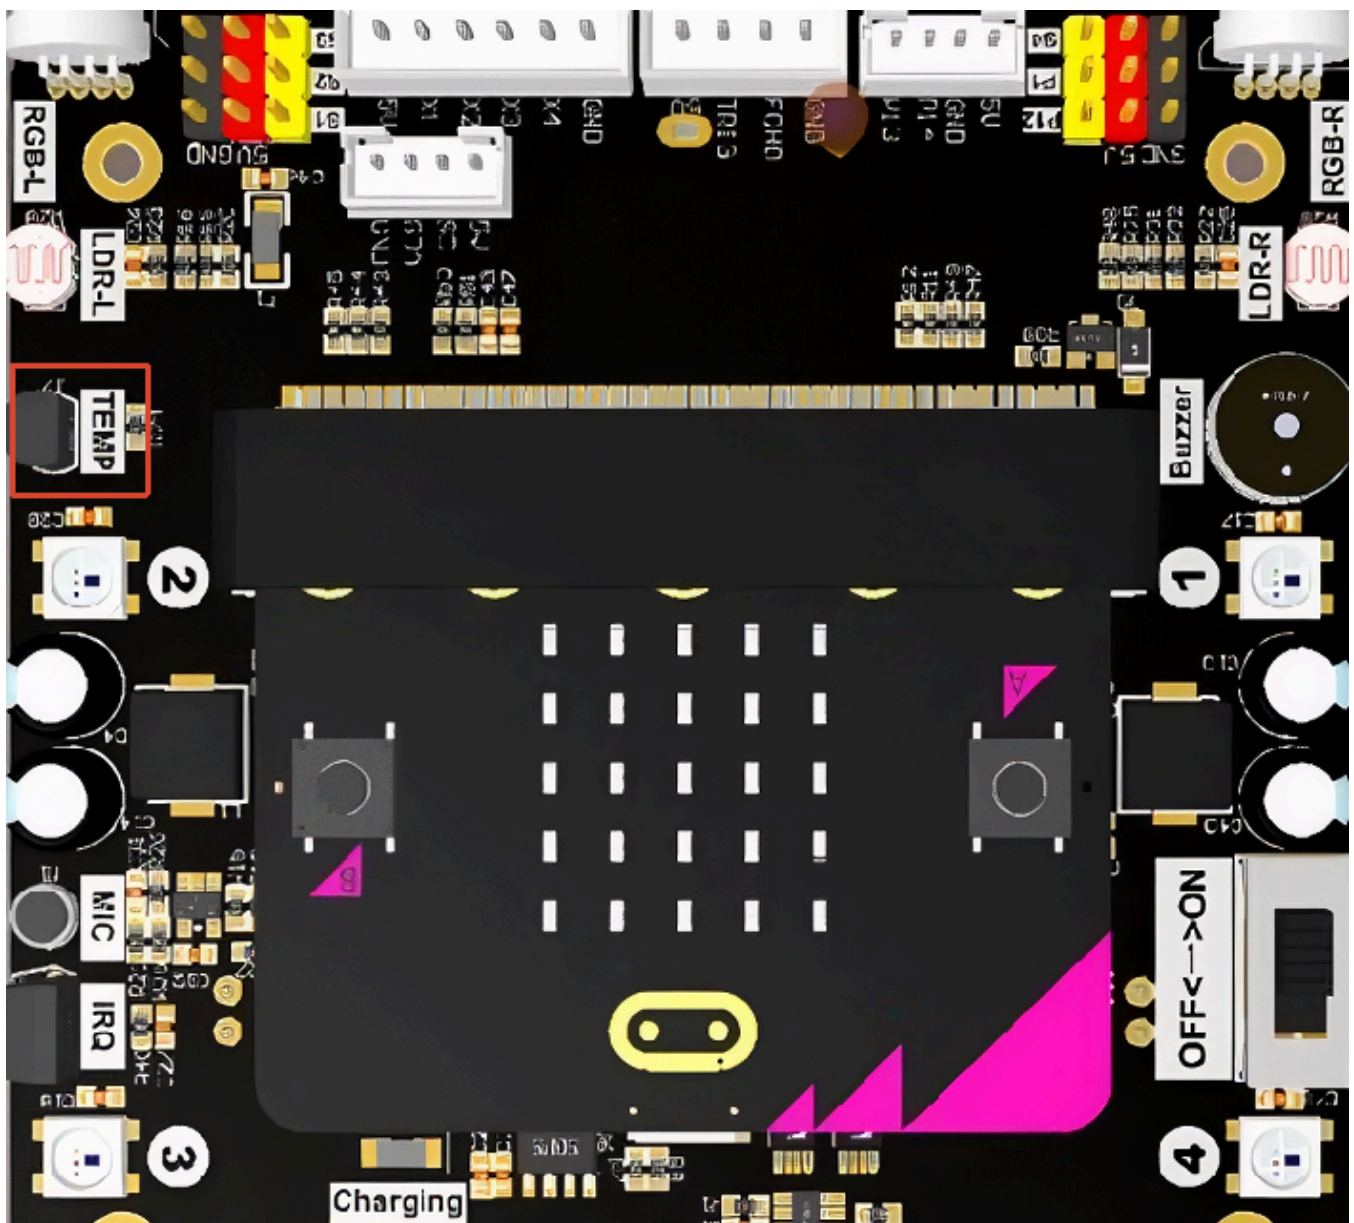

2. Implementation Principle

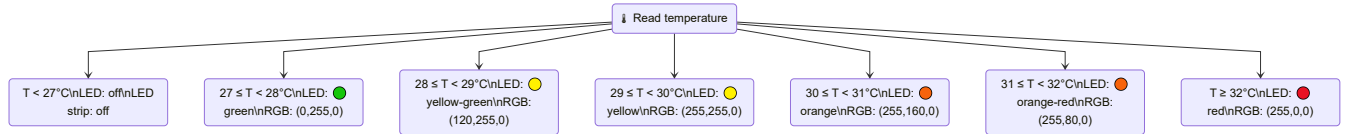

The program is as follows.

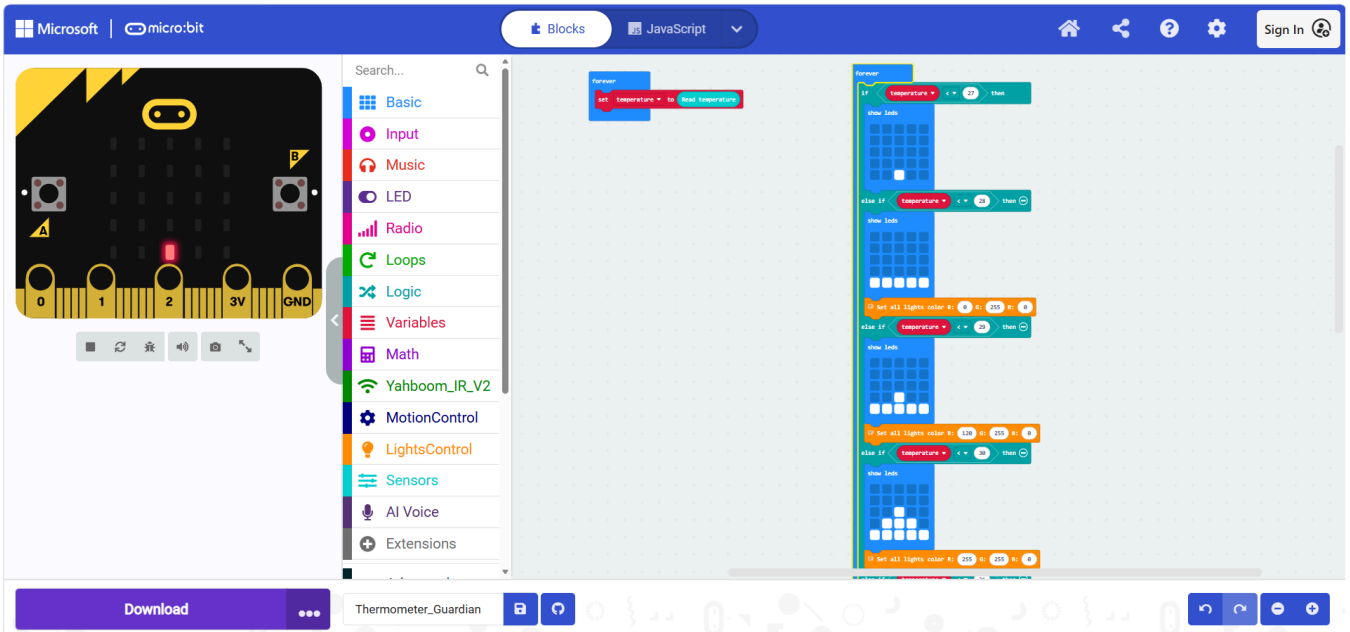

The positions of the blocks have already been introduced in previous tutorials, so we will not go into too much detail here.

4. Experiment Steps

1. Before flashing, turn off the car switch (switch it to OFF), and connect the Micro USB cable to the Micro:bit. Note: not the Charging interface on the expansion board.
2. Flash `20.Thermometer_Monitoring.hex` to the Micro:bit. For the flashing method, refer to section "4. Flashing Programs" in "2. Introduction to Graphic Programming"
3. Turn on the car switch (switch it to ON).

5. Experiment Phenomenon

⚠ Caution

Make sure your hands are dry; wet hands may cause a short circuit on the main board!

After flashing the program, you can rub the temperature sensor with your hands and you will find the temperature gradually rises. The car lights will gradually change from green to orange to red. At the same time, the higher the temperature, the higher the pattern shown on the LED matrix. After releasing your hand, the temperature sensor data will slowly drop, and the lights will gradually change from red to orange to green.

