


Drive ROS-WiFi camera module

Hardware list

7.4v lithium battery, MicroROS robot control board, WiFi camera

Steps

1. The wiring is as follows:

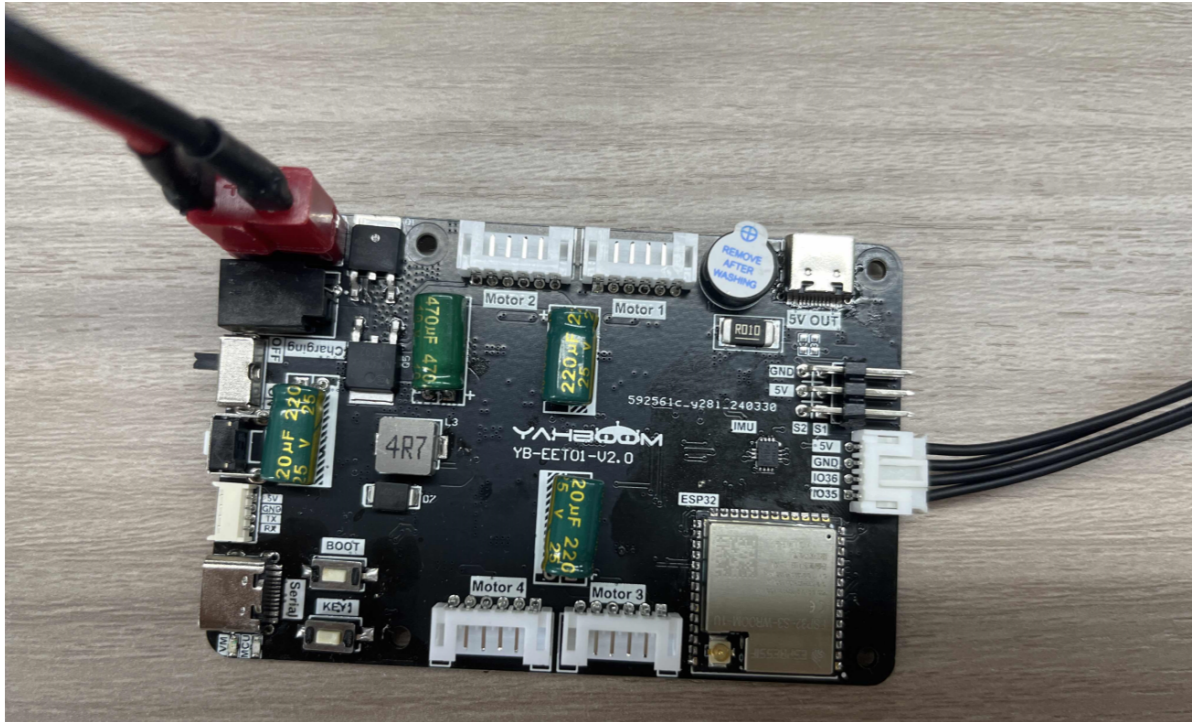

2. Turn on the expansion board switch, then you can see "Yahboom_ESP32_WIFI" in the computer list, click and connect to the hotspot. (No need password)



3. After connecting to this WiFi hotspot, we can enter the URL <http://192.168.4.1:81/stream> in the computer browser to access the camera screen

