

Unmanned driving integrated AI large model

1. Course Content

Note: This program runs on a sandbox map; you will need to adjust the program for your personal map.

This tutorial uses the factory-installed road sign and lane recognition models, primarily implementing autonomous driving road sign detection + map navigation + multimodal large model for intelligent control.

2. Course Prerequisites

- After completing the "Road Network Planning" chapter, save the road network navigation map and the road network map showing the car's trajectory.
- After completing the [04.AI Model Development], configure the large model's api_key and app_id.
- Obtain the pose data of the points the car needs to reach and store it in the large model's map_mapping.yaml file.
- Modify to road network navigation communication mode.

3. Configuration File Path

- Road Network Navigation Communication Mode

Open ~/.bashrc, uncomment this line, and change it as shown in the image. (After learning about the road network planning function, please restore this comment to avoid affecting the previous examples.)

```
vim ~/.bashrc
:wq #Save and exit
source ~/.bashrc #Update environment
```

```
export RMW_IMPLEMENTATION=rmw_cyclonedds_cpp
#unset RMW_IMPLEMENTATION
export ROS_DOMAIN_ID=62
export ROBOT_TYPE=M1          # A1, M1
export RPLIDAR_TYPE=tmini     # c1, tmini
export CAMERA_TYPE=nuwa       # usb, nuwa

export INIT_SERVO_S1=90       # 0~180
export INIT_SERVO_S2=30       # 0~100

source /opt/ros/humble/setup.bash
source /home/sunrise/yahboomcar_ros2_ws/software/library_ws/install/setup.bash
source /home/sunrise/yahboomcar_ros2_ws/yahboomcar_ws/install/setup.bash

# Read the number of rows and columns from the terminal size
read -r rows cols << (stty size)

:wq
```

- Road network navigation map and road network map

```
~/map
```

The image shows the saved map and road network diagram. The map.geojson file contains the road network diagram of the car's trajectory.

```
jetson@yahboom:~/map$ ls
map.data  map.geojson  map.pgm  map.posegraph  map.yaml  text
```

- Configure AI large model parameters

```
~/yahboomcar_ros2_ws/yahboomcar_ws/src/multi_brains/config/multi_brains_setting.
yaml
```

multi_brains_setting.yaml:

The main configuration involves specifying the application ID in the YAML file. Based on the camera model, select the corresponding application key and comment out the other one. After configuration, recompilation and execution are required. **The AI large model requires creating an account and binding the key on the API platform beforehand. For detailed configuration instructions, please refer to section [04. AI Model Development] in the Basic Knowledge chapter.**

```
##### 通用设置项 / Common Settings #####
ALIYUN_API_KEY: 'sk-937395d7e44b4bc59a29f7dac85894ab'      # 阿里云API密钥 / Aliyun API KEY
LANGUAGE: 'zh'      # 语言设置: zh=中文, en=英文 / Language setting: zh=Chinese, en=English
DEBUG_MODE: False   # 调试模式 / Debug mode

##### Dify配置选项 / Dify Configuration #####
DIFY_BASE_URL: "http://localhost/v1"      # Dify基础地址 / Dify base URL

##### 国内 / Domestic #####
# usb-camera
DIFY_API_KEY: "app-NM01T5aPmhf1EIFFveufABhm"      # usb-camera的Dify决策大模型应用API密钥 / Dify decision model API_KEY for usb-camera
# nuwa-camera
DIFY_API_KEY: "app-Jbp41pThkD9kzJxvYUNXNYP"      # nuwa-camera的Dify决策大模型应用API密钥 / Dify decision model API_KEY for nuwa-camera

##### 国际 / International #####
# usb-camera
DIFY_API_KEY: "app-zM72r102Utnhh4LUmGnLdumJ"      # usb-camera的Dify决策大模型应用API密钥(国际版) / Dify decision model API_KEY for usb-camera (International)
# nuwa-camera
DIFY_API_KEY: "app-39GHRVCvEgt33Jmz9QuBYP4F"      # nuwa-camera的Dify决策大模型应用API密钥(国际版) / Dify decision model API_KEY for nuwa-camera (International)

##### 语音识别功能设置 / ASR Function Settings #####
USE_ONLINE_ASR: True      # 是否使用在线ASR / Use online ASR
ASR_SUPPLIER: 'aliyun'    # ASR供应商(仅当使用在线ASR时生效): 中国大陆地区: aliyun 国际地区: xunfei / ASR supplier (valid only when using online ASR): Main
                           # 在线ASR模型 / Online ASR model
ASR_THRESHOLD: 3          # ASR识别结果置信度, 低于该阈值则不进行后续处理, 单位: 字符 / ASR recognition threshold, results below this value will not be proce-
                           # 唤醒时间间隔, 防止在此时间内被多次唤醒, 单位: 秒 / Wakeup time threshold to prevent multiple wakeups within this period (unit:
WAKEUP_THRESHOLD: 5.0
```

- Configure the pose data of the target points

```
~/yahboomcar_ros2_ws/yahboomcar_ws/src/multi_brains/config/map_mapping.yaml
```

Add new target points under the route navigation base section, as this course uses route navigation.

```
#此处可新增添加区域对应的栅格地图坐标点，注意和上面格式保持一致
#Here, you can add the raster map coordinate points corresponding to the added area. Please note that the format should be consistent with the above
road_net_map_areas: #路网导航 road network navigation
A:
  name: '五金店'
  position:
    x: 1.1409525871276855
    y: -0.696854446411328
    z: 0.0
  orientation:
    x: 0.0
    y: 0.0
    z: 0.7420813339272786
    w: 0.6703098491270368
B:
  name: '数字楼'
  position:
    x: 2.229278564453125
    y: -0.5782679915428162
    z: 0.0
  orientation:
    x: 0.0
    y: 0.0
    z: -0.999210671704489
    w: 0.03972447044157906
C:
  name: '学校'
  position:
    x: 1.520
    y: 0.124
    z: 0.0
  orientation:
    x: 0.0
    y: 0.0
    z: 0.093
    w: 0.996
D:
  name: '工地'
  position:
    x: 0.006
    y: -1.546
    z: 0.0
  orientation:
    x: 0.0
```

If you don't know how to obtain the pose data of a point, you can first refer to the "04-Route Planning Combined with Sandbox Map Case" in the route planning navigation section.

After modifying the yaml files, you need to recompile and then run the program.

```
cd ~/yahboomcar_ros2_ws/yahboomcar_ws
colcon build --packages-select multi_brains
```

4. Program Startup

4.1 Startup Command

Open the host terminal and start the Dify environment.

```
sh ~/bringup_dify.sh
```

```
[System Information]
IP Address_1: 192.168.11.108
IP Address_2: 172.18.0.1
-----
ROS DOMAIN ID: 63 | ROS: humble
my_robot_type: M1 | my_lidar: c1 | my_camera: usb
-----
sunrise@ubuntu:~$ sh ~/bringup_dify.sh
[+] Running 11/11
✓ Container docker-ssrf-proxy-1      Running      0.0s
✓ Container docker-web-1             Running      0.0s
✓ Container docker-redis-1           Running      0.0s
✓ Container docker-weaviate-1        Running      0.0s
✓ Container docker-db-1              Healthy      0.5s
✓ Container docker-sandbox-1         Running      0.0s
✓ Container docker-api-1             Running      0.0s
✓ Container docker-worker-1          Running      0.0s
✓ Container docker-worker_beat-1     Running      0.0s
✓ Container docker-plugin_daemon-1   Running      0.0s
✓ Container docker-nginx-1           Running      0.0s
```

- Launch large model + chassis + camera

```
ros2 launch multi_brains llm_agent_control.launch.py enable_route_nav:=True
```

```

[model service-12] ALSA lib pcm.c:2664:(snd_pcm_open nouupdate) Unknown PCM cards.pcm.modem
[model service-12] ALSA lib pcm.c:2664:(snd_pcm_open nouupdate) Unknown PCM cards.pcm.modem
[model service-12] ALSA lib pcm.c:2664:(snd_pcm_open nouupdate) Unknown PCM cards.pcm.phoneline
[model service-12] ALSA lib pcm.c:2664:(snd_pcm_open nouupdate) Unknown PCM cards.pcm.phoneline
[model service-12] Cannot connect to server socket err = No such file or directory
[INFO] [model service-12]: process started with pid [116868]
[INFO] [action service usb-13]: process started with pid [116870]
[action service usb-13] [INFO] [1766401793.044243388] [action service usb]: enable route nav: True
[action service usb-13] [INFO] [1766401793.152994034] [action service usb]: ROS Action Service Initialization completed
[model service-12] [INFO] [1766401802.719665243] [model service]: Diffy LLM connection successful
[model service-12] [WARN] [1766401802.720780204] [rcl_logging_rosout]: Publisher already registered for provided node name. If this is due to multiple nodes with the same name then all logs for that logger name will go out over the existing publisher. As soon as any node with that name is destructed it will unregister the publisher, preventing any further logs for that name from being published on the rosout topic.
[model service-12] ALSA lib pcm.c:2664:(snd_pcm_open nouupdate) Unknown PCM cards.pcm.rear
[model service-12] ALSA lib pcm.c:2664:(snd_pcm_open nouupdate) Unknown PCM cards.pcm.center_lfe
[model service-12] ALSA lib pcm_oss.c:397:(snd_pcm_oss_open) Cannot open device /dev/dsp
[model service-12] ALSA lib confmisc.c:160:(snd_config_get_card) Invalid field card
[model service-12] ALSA lib pcm_usb_stream.c:482:(snd_pcm_usb_stream_open) Invalid card 'card'
[model service-12] ALSA lib confmisc.c:160:(snd_config_get_card) Invalid field card
[model service-12] ALSA lib pcm_usb_stream.c:482:(snd_pcm_usb_stream_open) Invalid card 'card'
[model service-12] ALSA lib pcm_dmix.c:1005:(snd_pcm_dmix_open) The dmix plugin supports only playback stream
[model service-12] Cannot connect to server socket err = No such file or directory
[model service-12] Cannot connect to server request channel
[model service-12] jack server is not running or cannot be started
[model service-12] JackShmReadWritePtr::~JackShmReadWritePtr - Init not done for -1, skipping unlock
[model service-12] JackShmReadWritePtr::~JackShmReadWritePtr - Init not done for -1, skipping unlock
[model service-12] [INFO] [1766401803.247590096] [ASR_Detect]: paraformer-realtime-v2 ASR Engine initialized successfully
[model service-12] [INFO] [1766401803.262672610] [model service]: Tongyi TTS Engine initialized successfully
[model service-12] [INFO] [1766401803.263389574] [model service]: ROS LLM Service Initialization completed

```

- Enter the road network navigation docker

```
bringup_ros2kilted
```

```

jetson@yahboom:~$ bringup_ros2kilted
Access control disabled, clients can connect from any host
+] Running 1/1
✓ Container ros2_kilted-ros2_kilted-1 Started 1.8s
jetson@yahboom:~$

```

```
exec_ros2kilted
```


```

jetson@yahboom:~$ exec_ros2kilted
root@yahboom:/#


```

Enter this command in the terminal.

```
ros2 launch road_net_route roadnet_nav2.launch.py
```

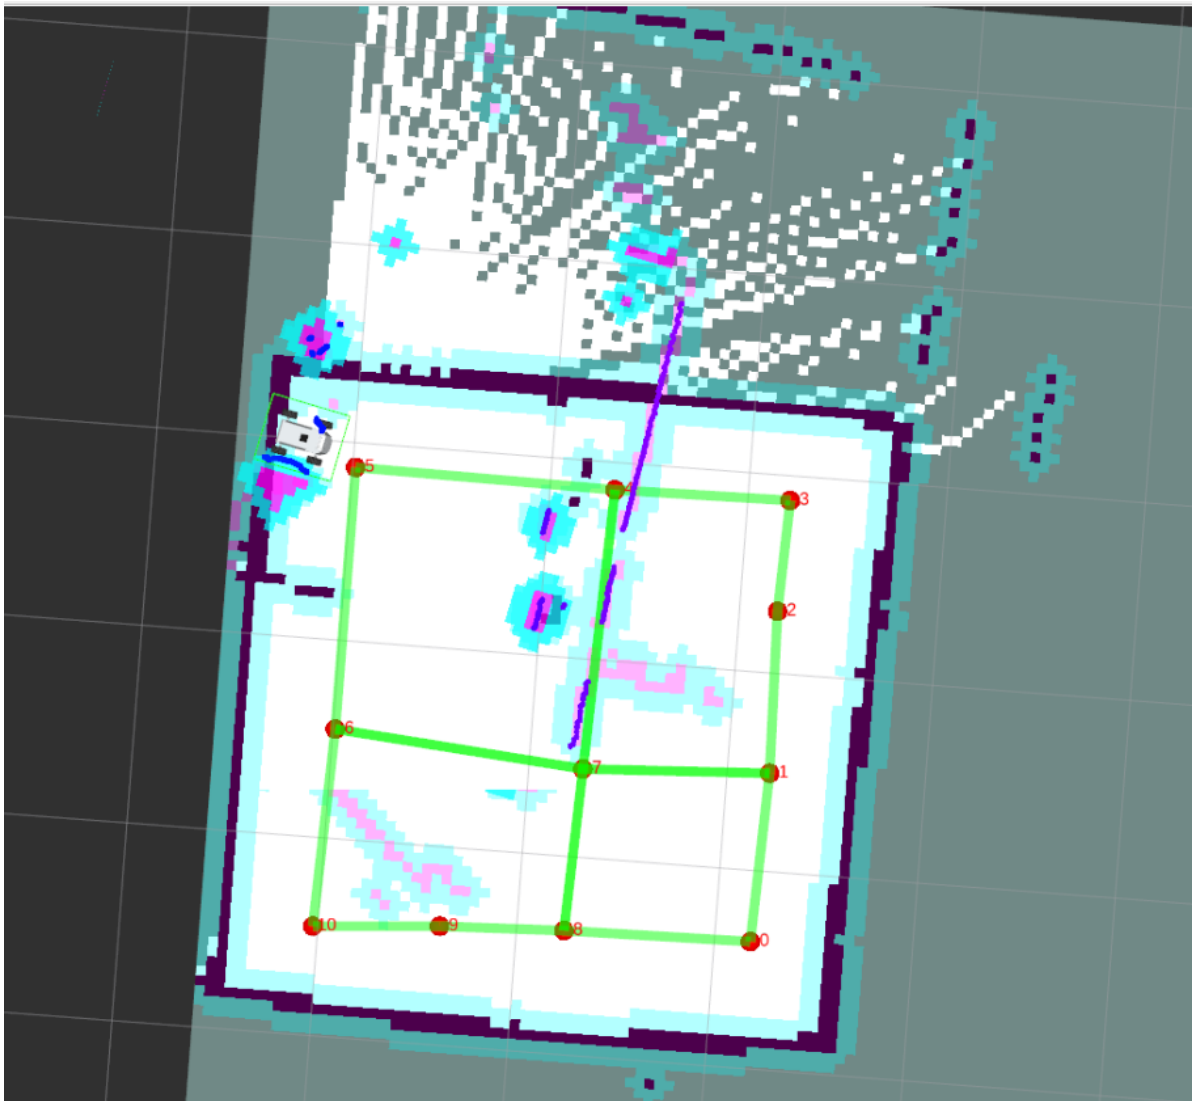


Upon entering, you'll notice that the point cloud and the map don't overlap; you'll need to use 2D Pose Estimate to reposition the car.

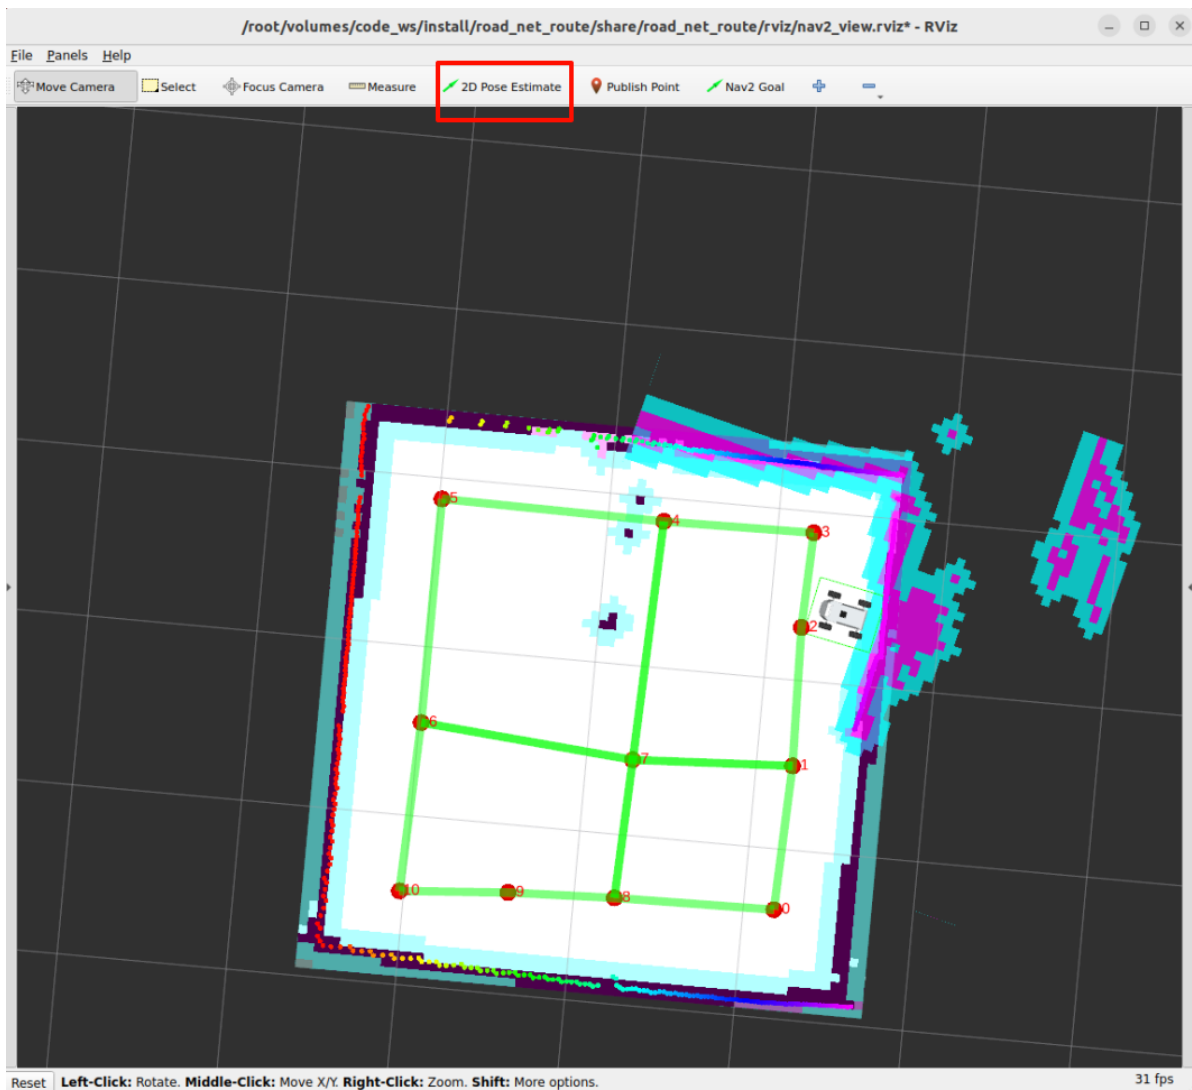

- Start YOLO Road Sign Recognition

```
ros2 launch auto_drive auto_drive.launch.py enable_route_nav:=True
```

After successful launch, a visual interface will appear.

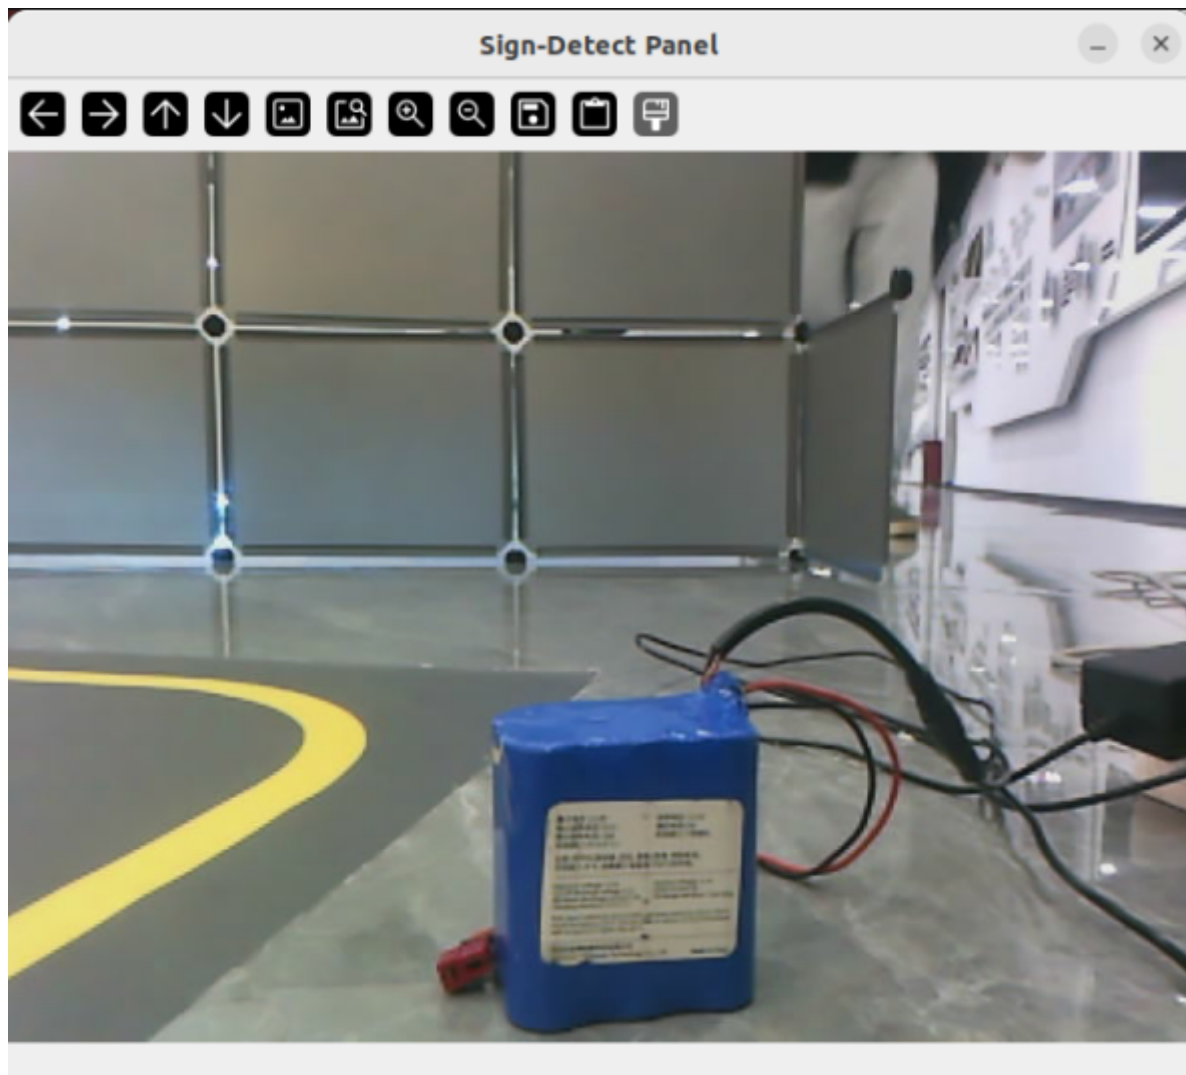

4.2 Test Cases

Here are some reference test cases. Users can create their own dialogue commands.

- Navigate to the construction site while following traffic rules

4.2.1 Case 1

First, wake up the robot with "Hello yahboom". The robot will respond with "I'm here, please give instructions". After the robot responds, the buzzer will sound briefly (beep—), then you can speak. The robot will perform voice activity detection (VAD); if there is voice activity, it will print 1, otherwise it will print -. When speaking ends, it will perform tail silence detection; if silent for more than 450ms, it will stop recording.

Dynamic voice activity detection (VAD) is shown in the figure below:


```
jetson@yahboom: ~/yahboomcar_ros2_ws/yahboomcar_ws
jetson@yahboom: ~/yahboomcar_ros2_ws/yahboomcar_ws 92x30
[asr-16] [INFO] [1764657278.481868423] [asr]: -
[asr-16] [INFO] [1764657278.542368095] [asr]: 1
[asr-16] [INFO] [1764657278.602056950] [asr]: 1
[asr-16] [INFO] [1764657278.663014816] [asr]: 1
[asr-16] [INFO] [1764657278.723742529] [asr]: 1
[asr-16] [INFO] [1764657278.783522940] [asr]: 1
[asr-16] [INFO] [1764657278.844035892] [asr]: 1
[asr-16] [INFO] [1764657278.904690834] [asr]: 1
[asr-16] [INFO] [1764657278.965337647] [asr]: -
[asr-16] [INFO] [1764657279.026852175] [asr]: 1
[asr-16] [INFO] [1764657279.086691627] [asr]: 1
[asr-16] [INFO] [1764657279.148074021] [asr]: 1
[asr-16] [INFO] [1764657279.208527417] [asr]: -
[asr-16] [INFO] [1764657279.268960685] [asr]: 1
[asr-16] [INFO] [1764657279.329160439] [asr]: -
[asr-16] [INFO] [1764657279.389803891] [asr]: -
[asr-16] [INFO] [1764657279.450415982] [asr]: 1
[asr-16] [INFO] [1764657279.511227697] [asr]: 1
[asr-16] [INFO] [1764657279.571453372] [asr]: 1
[asr-16] [INFO] [1764657279.632190108] [asr]: 1
[asr-16] [INFO] [1764657279.692880410] [asr]: 1
[asr-16] [INFO] [1764657279.753505045] [asr]: 1
[asr-16] [INFO] [1764657279.814180307] [asr]: 1
[asr-16] [INFO] [1764657279.874934707] [asr]: -
[asr-16] [INFO] [1764657279.934630313] [asr]: -
[asr-16] [INFO] [1764657279.995254692] [asr]: 1
[asr-16] [INFO] [1764657280.055911840] [asr]: 1
[asr-16] [INFO] [1764657280.124965099] [asr]: -
[asr-16] [INFO] [1764657280.185932819] [asr]: -
[asr-16] [INFO] [1764657280.246335620] [asr]: -
```

The robot first recognizes the user's speech, then makes decisions and takes actions according to the instructions. Simultaneously, the terminal prints the following information:

```
jetson@yahboom: ~/yahboomcar_ros2_ws/yahboomcar_ws
jetson@yahboom: ~/yahboomcar_ros2_ws/yahboomcar_ws 92x30
[asr-16] [INFO] [1764657605.668674285] [asr]: 1
[asr-16] [INFO] [1764657605.729629067] [asr]: 1
[asr-16] [INFO] [1764657605.790110264] [asr]: 1
[asr-16] [INFO] [1764657605.849843115] [asr]: -
[asr-16] [INFO] [1764657605.911233176] [asr]: -
[asr-16] [INFO] [1764657605.972604740] [asr]: -
[asr-16] [INFO] [1764657606.033191989] [asr]: -
[asr-16] [INFO] [1764657606.093282964] [asr]: -
[asr-16] [INFO] [1764657606.153825827] [asr]: -
[asr-16] [INFO] [1764657606.213770717] [asr]: -
[asr-16] [INFO] [1764657606.274789948] [asr]: -
[asr-16] [INFO] [1764657606.335223463] [asr]: -
[asr-16] [INFO] [1764657606.395954556] [asr]: -
[asr-16] [INFO] [1764657606.458824763] [asr]: -
[asr-16] [INFO] [1764657606.518130303] [asr]: -
[asr-16] [INFO] [1764657606.577540327] [asr]: -
[asr-16] [INFO] [1764657606.640408294] [asr]: -
[asr-16] [INFO] [1764657606.698531713] [asr]: -
[asr-16] [INFO] [1764657606.757904103] [asr]: -
[asr-16] [INFO] [1764657606.818232686] [asr]: -
[asr-16] [INFO] [1764657606.878078981] [asr]: -
[asr-16] [INFO] [1764657606.939070019] [asr]: -
[asr-16] [INFO] [1764657606.998873624] [asr]: -
[asr-16] [INFO] [1764657607.060230339] [asr]: -
[asr-16] [INFO] [1764657607.120183356] [asr]: -
[asr-16] [INFO] [1764657608.765174546] [asr]: -
[asr-16] [INFO] [1764657608.765862122] [asr]: 😊okay, let me think for a moment...
[model_service-14] [INFO] [1764657610.791974513] [model_service]: 决策层AI规划:1. 导航去工地
[model_service-14] 2. 途中遵守交通规则
```

The decision-making layer's large model outputs the planned task steps:

```
[model_service-14] [INFO] [1764657284.944787510] [model_service]: 决策层AI规划:1. 导航去工地
[model_service-14] 2. 途中遵守交通规则
```


Then, the execution layer's large model executes according to these task steps:


```


[action_service_nuwa-15] [INFO] [1764658284.847215058] [action_service]: Published message:
机器人反馈:执行control_sign(enable)完成
[action_service_nuwa-15] [INFO] [1764658284.858613098] [action_service]: Published message:
机器人反馈:执行['navigation(D)', 'control_sign(enable)']完成
[model_service-14] [INFO] [1764658286.053808441] [model_service]: "action": [], "response":
交通规则已开启, 现在安全出发去工地
[model_service-14] [INFO] [1764658287.629069342] [model_service]: "action": ['finishtask()']
, "response": 已到达工地, 任务完成!
[action_service_nuwa-15] [INFO] [1764658291.935198082] [action_service]: Published message:
机器人反馈:回复用户完成
[model_service-14] [INFO] [1764658293.260168282] [model_service]: "action": ['finishtask()']
, "response": 已到达工地, 任务完成!

```


Simultaneously, as you can see, the road network navigation interface displays a grid route for the car to navigate to the construction site.

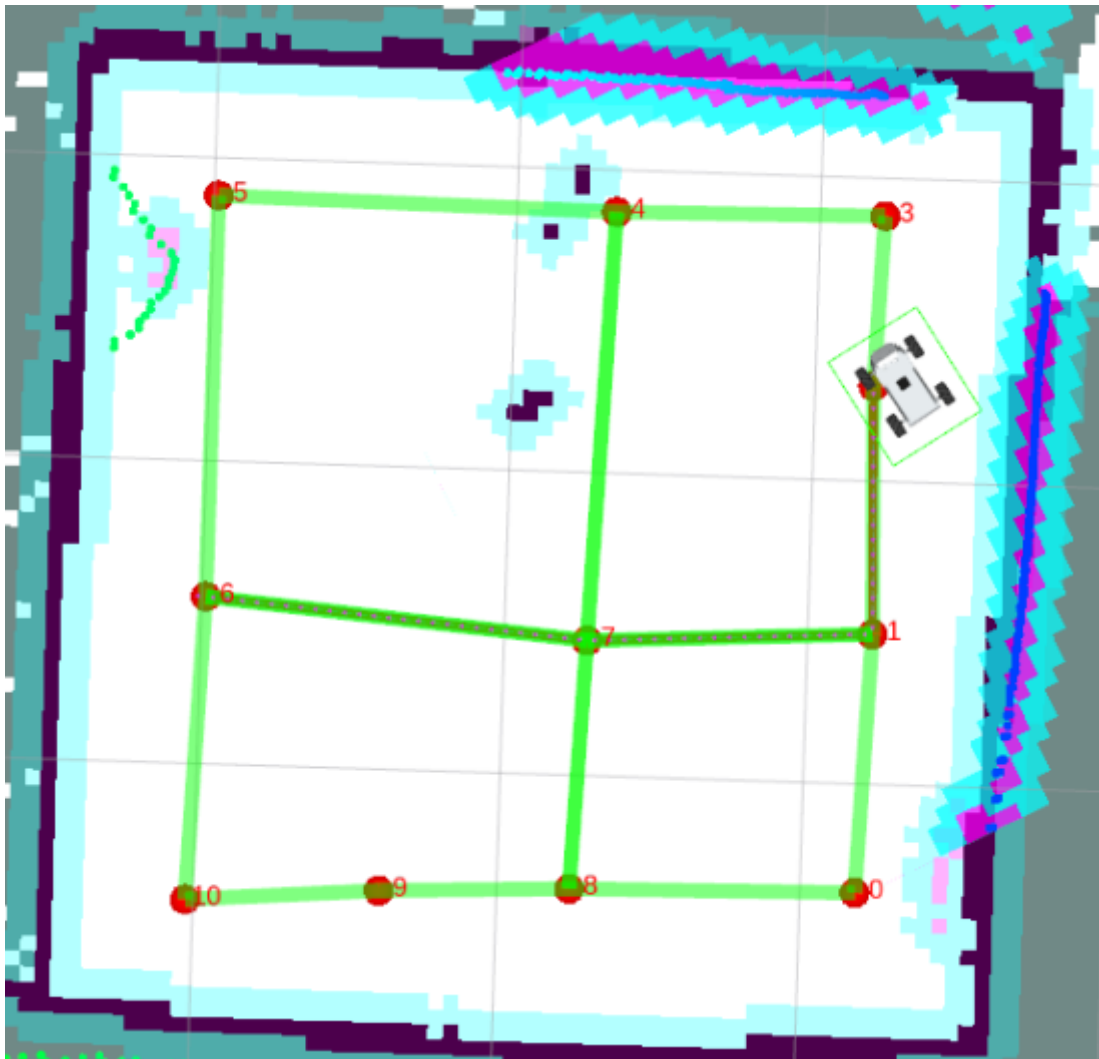

If we turn on a red light midway through the navigation, the car will stop and wait for the green light before resuming navigation.

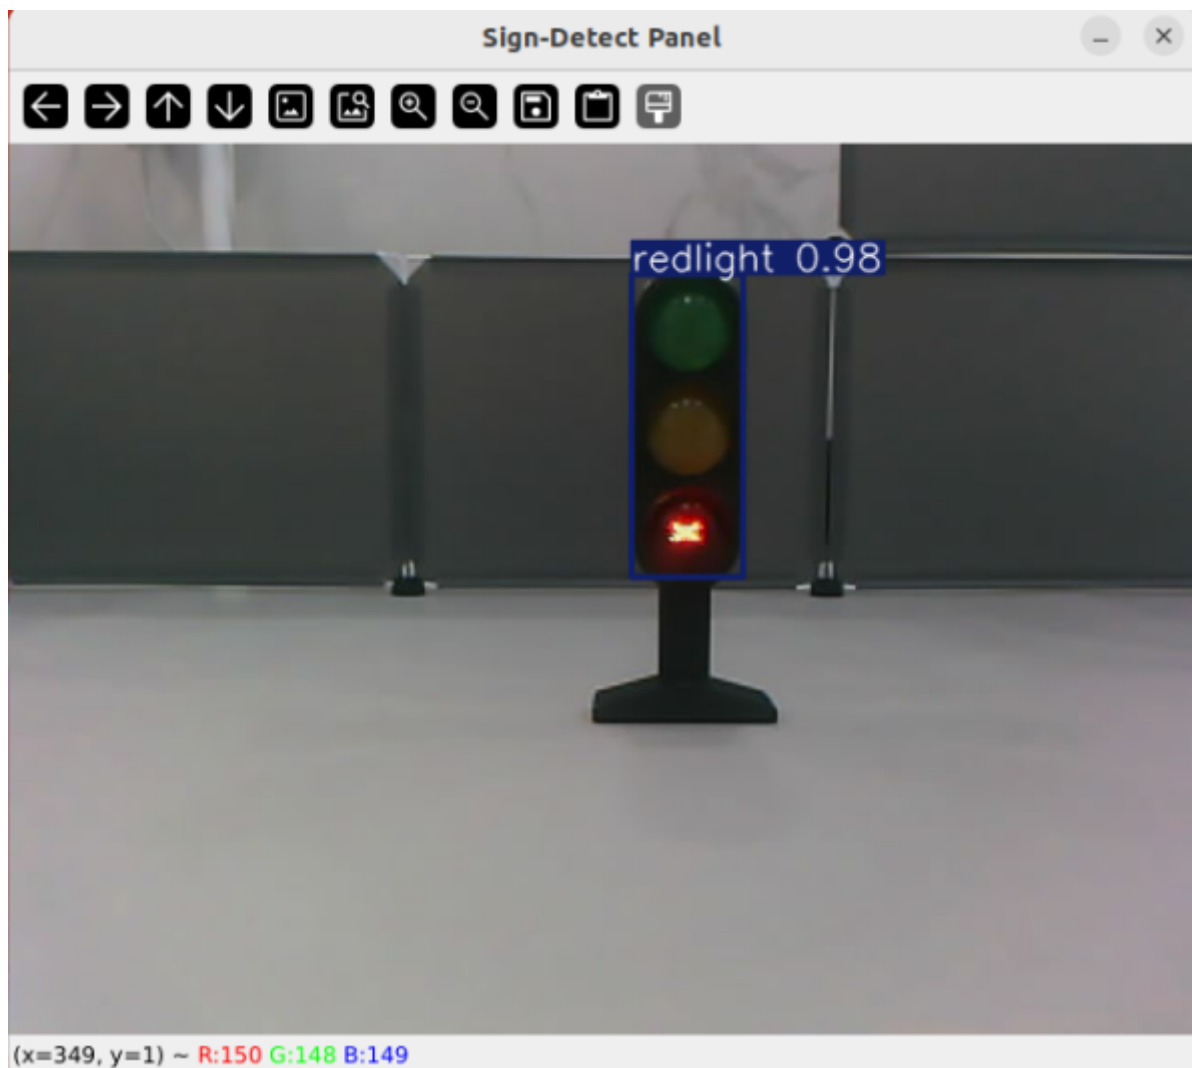

When the green light comes on, the car will continue navigating. **Note that the traffic lights should not be placed too close to the car's route; if they are too close, they may be perceived as obstacles and affect navigation.**

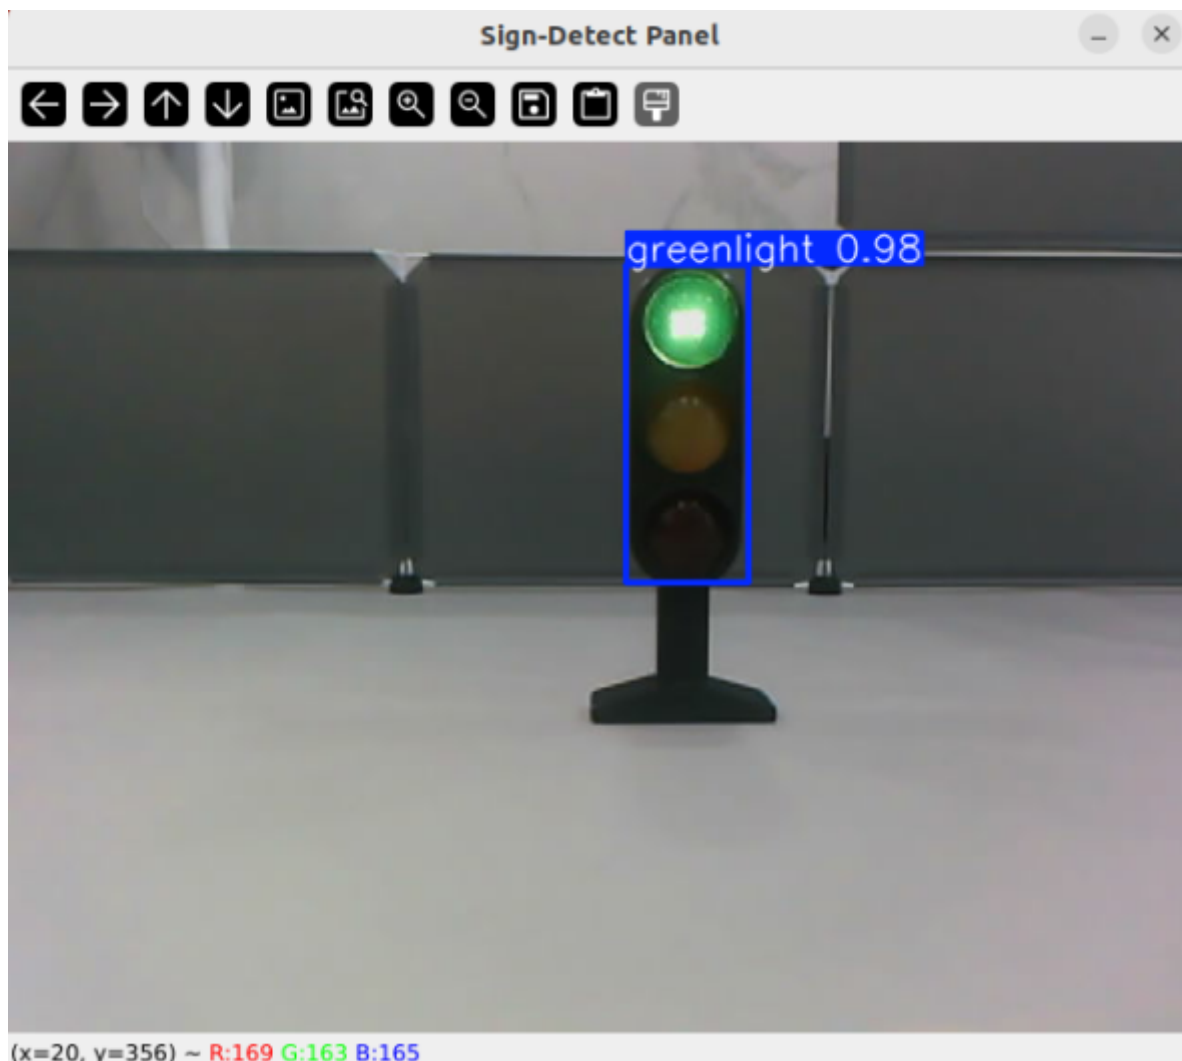

5. Source Code Analysis

5.1 Path to the Large Model Source Code

```
~/yahboomcar_ros2_ws/yahboomcar_ws/src/multi_brains/multi_brains/action_service_nuwa.py
```

action_service_nuwa.py: This file contains the main logic for the large model integration.

Key functionalities include:

- Providing action servers to handle navigation and robot control commands
- Integrating speech recognition and speech synthesis
- Enables switching between road network navigation and regular navigation
- Handles large language model interactions

It supports two navigation modes: **Regular Navigation:** a standard navigation mode based on a single point target; and **Road Network Navigation:** a navigation mode based on a predefined road network path. To integrate with autonomous driving, `enable_route_nav: True` needs to be enabled for road network navigation.

Navigation Process:

- Receive navigation request
- Select navigation strategy based on current mode (Road Network/Regular)
- Execute navigation actions
- Provide feedback and results

```
# In the init_param_config method
self.declare_parameter("enable_route_nav", False)
self.enable_route_nav =
self.get_parameter("enable_route_nav").get_parameter_value().bool_value
```

Navigation mode switching:

```
def handle_navigation_request(self, destination):
    """Handling navigation requests"""
    if self.enable_route_nav:
        # Road network navigation mode
        if destination in self.route_network:
            self.follow_route(self.route_network[destination])
        else:
            self.get_logger().warn(f"No route found for destination:
{destination}")
    else:
        # Normal navigation mode
        self.navigate_to_waypoint(destination)
```

5.2 Road Network Navigation Source Code Path

```
#jetson orin nano
~/ros2_kilted/volumes/code_ws/src/road_net_route/launch/roadnet_nav2.launch.py
#RDK X5
/home/sunrise/ros2_kilted/volumes/code_ws/src/road_net_route/launch/roadnet_nav2
.launch.py
```

roadnet_nav2.launch.py:

The launch file will directly call the file saved in the /root/map path. If it has a different name, you can change the name here and then recompile and run it.

```
declare_map_yaml_cmd = DeclareLaunchArgument(
    'map',
    default_value='/root/map/map.yaml',
)
declare_pose_map_cmd = DeclareLaunchArgument(
    'pose_map',
    default_value='/root/map/map',
)
declare_roadnet_file_cmd = DeclareLaunchArgument(
    'roadnet_file',
    default_value='/root/map/map.geojson',
    description=".geojson格式路网文件路径",
)
```

The parameter file used for navigation.

```
declare_params_file_cmd = DeclareLaunchArgument(  
    'params_file',  
    default_value=os.path.join(get_package_share_directory('road_net_route'),  
    'config', 'nav2_kilted.yaml'),  
    description='Full path to the ROS2 parameters file to use for all  
    launched nodes',  
    )
```

You can open the nav2_kilted.yaml file in this path and modify some navigation parameters. Normally, you don't need to modify the parameters; most of them are pre-tuned and don't require modification.

```
~/ros2_kilted/volumes/code_ws/src/road_net_route/config/nav2_kilted.yaml
```

5.3 YOLO recognition source code

```
~/yahboomcar_ros2_ws/yahboomcar_ws/src/auto_drive/launch/auto_drive.launch.py
```

auto_drive.launch.py:

The YOLO system is used to recognize road signs and instruct the car to perform corresponding actions. However, because this is based on a road network navigation system, the right turn and stop road signs will be disabled, as these two signs will interfere with the road network navigation.

