

# 13、 APP Mapping and Navigation

## How to download mapping APP

1、 Android users search "ROSRobot" in Play Store to download APP.

2、 iOS users search "ROSRobot" in App Store to download APP.

### 13.1.1、 start up

NOTE:

1. When creating a map, the slower the speed, the better the effect (note: if the rotation speed is slower). If the speed is too fast, the effect will be very poor

2. Before creating a map, you must first close the self starting large program

According to different vehicle models, you only need to set the purchased model in `[. bashrc]`, such as X1 (ordinary four-wheel drive), X3 (wheel drive), X3plus (wheel mechanical arm), R2 (Ackermann differential), etc. This section takes X3 as an example

Open the `[. bashrc]` file

```
sudo vim .bashrc
```

Search for the `ROBOT_TYPE` parameter and modify the corresponding vehicle model

```
export ROBOT_TYPE=X3    # ROBOT_TYPE: X1 X3 X3plus R2 X7
```

Start the driver command (on the robot side). For ease of operation, this section takes `[mono+laser+yahboomcar]` as an example. Laser+Transbot cannot set the camera screen.

```
roslaunch yahboomcar_nav laser_bringup.launch    # laser + yahboomcar
roslaunch yahboomcar_nav laser_usb_bringup.launch # mono + laser + yahboomcar
```

Start the mapping function (robot side)

```
roslaunch yahboomcar_nav yahboomcar_map.launch use_rviz:=false map_type:=gmapping
```

Start the radar data to point cloud node and rosbridge and other nodes (raspberry pie version)

```
source /home/pi/ROS/laser_app/devel/setup.bash
roslaunch /home/pi/ROS/laser_app/laser_app.launch
```

Start the radar data to point cloud node and rosbridge and other nodes (Jetson nano version)


```
source /home/jetson/ROS/laser_app/devel/setup.bash
roslaunch /home/jetson/ROS/laser_app/laser_app.launch
```

### 13.1.2、usage


After the robot is started, click APP



To ensure that the mobile phone and the robot are in the same LAN, enter the robot **[IP]** in the input box, select ROS1 by default, select **[en]** as the default language, and click **[Connect]** to log in.

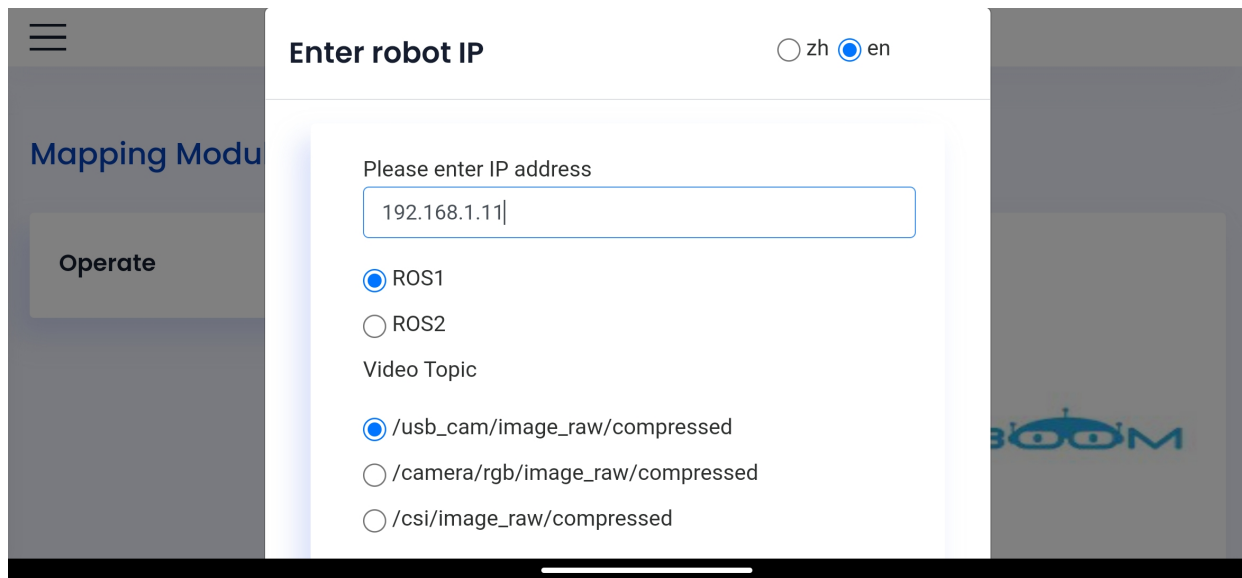The screenshot shows the 'Enter robot IP' screen of the ROS2 Robot app. On the left, there is a sidebar with a hamburger menu icon, the text 'Mapping Modu', and a button labeled 'Operate'. The main content area has a title 'Enter robot IP' and language selection options 'zh' and 'en' (selected). Below this, there is a text input field labeled 'Please enter IP address' containing '192.168.1.11'. Underneath the input field, there are radio buttons for 'ROS1' (selected) and 'ROS2'. Further down, there is a section labeled 'Video Topic' with three radio button options: '/usb\_cam/image\_raw/compressed' (selected), '/camera/rgb/image\_raw/compressed', and '/csi/image\_raw/compressed'. The bottom of the screen shows a black bar with a white line, typical of a mobile phone interface.

Enter the ip displayed on the oled of the car, and the radar scanning map will appear after the connection is successful, as shown in the figure below:

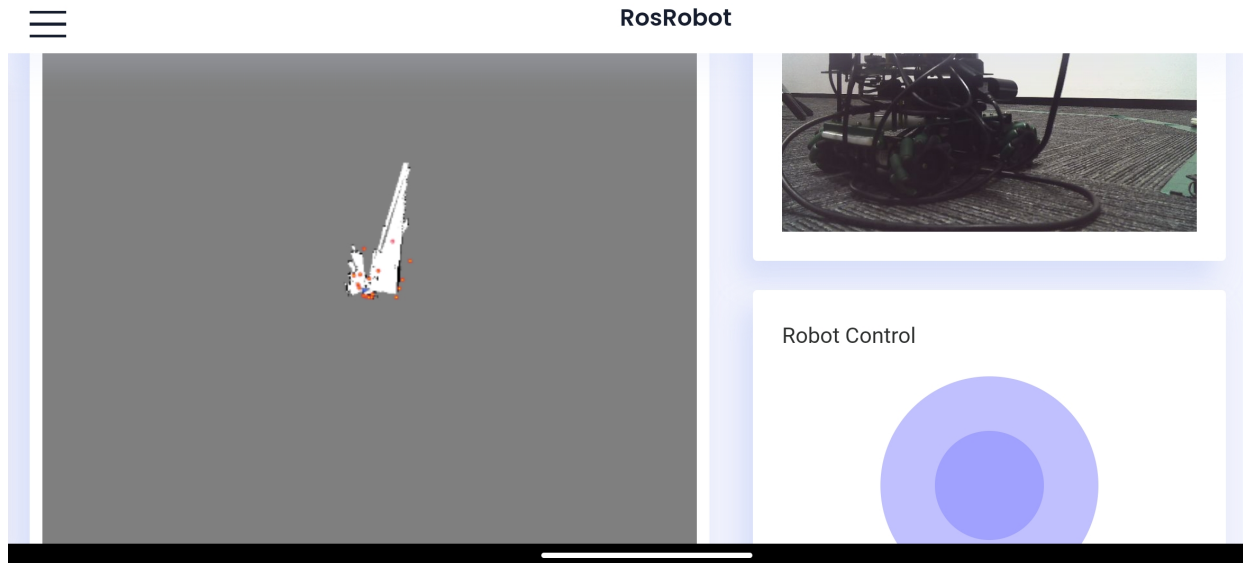


At this time, slide the joystick in the lower right corner. When sliding the joystick, the slower the speed, the better the effect (especially the rotation speed), and control the robot to move until the map is created.

### 13.1.3、 save map

When the map is created, click the Save Map button

Click on the top of the input box, enter the name **[house]** to save the map, and click **[Submit]** (**English only, no symbols**), and save the map.

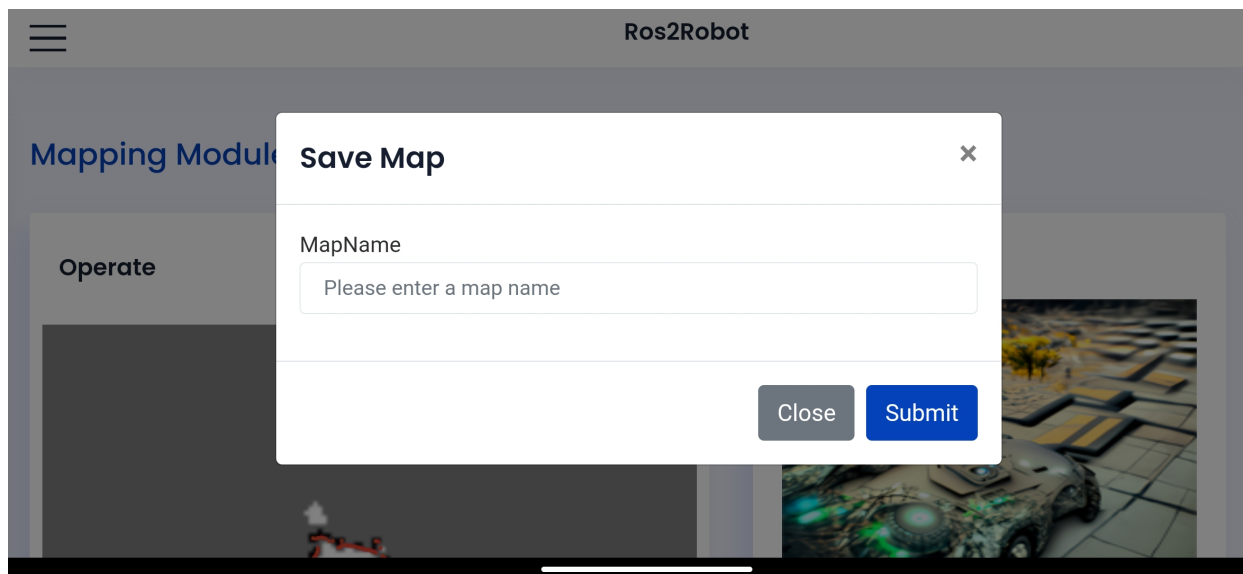

The directory for saving the map is as follows:

Raspberry Pie:

```
/home/pi/yahboom_ws/src/yahboom_nav/maps
```

jetsin nano:

```
/home/jetson/yahboom_ws/src/yahboom_nav/maps
```

## 13.2、 Navigation obstacle avoidance

**Note: [R2] of the remote controller has the function of canceling the navigation target point!!!**  
**When navigating [Full] Do not use the joystick control!!!**

### 13.2.1、 start up

Start the driver command (on the robot side). For ease of operation, this section takes **[mono+laser+RosMaster]** as an example. **Laser+RosMaster** cannot set the camera screen.

```
roslaunch yahboomcar_nav laser_bringup.launch           # laser + yahboomcar
roslaunch yahboomcar_nav laser_usb_bringup.launch       # mono + laser + yahboomcar
```

Start navigation obstacle avoidance function (robot side)

```
roslaunch yahboomcar_nav yahboomcar_navigation.launch use_rviz:=false map:=house
```

- Use\_Rviz parameter: whether to turn on rviz.
- map: Load a map file named 'house'.



Start the radar data to point cloud node and rosbridge and other nodes (raspberry pie version)

```
source /home/pi/ROS/laser_app/devel/setup.bash
roslaunch /home/pi/ROS/laser_app/laser_app.launch
```

Start the radar data to point cloud node and rosbridge and other nodes (Jetson nano version)


```
source /home/jetson/ROS/laser_app/devel/setup.bash
roslaunch /home/jetson/ROS/laser_app/laser_app.launch
```

The login method is the same as above. After login, you will directly enter the map building interface. At this time, you need to click the Settings button to open the menu bar and drop down to select the navigation. Click the navigation button to enter the navigation interface.

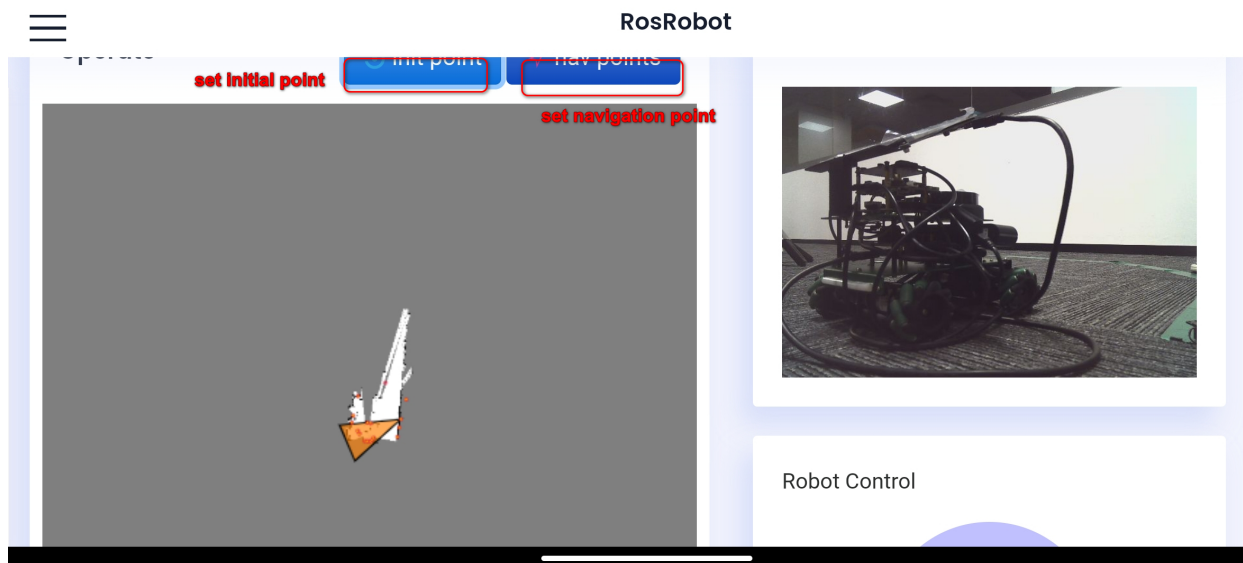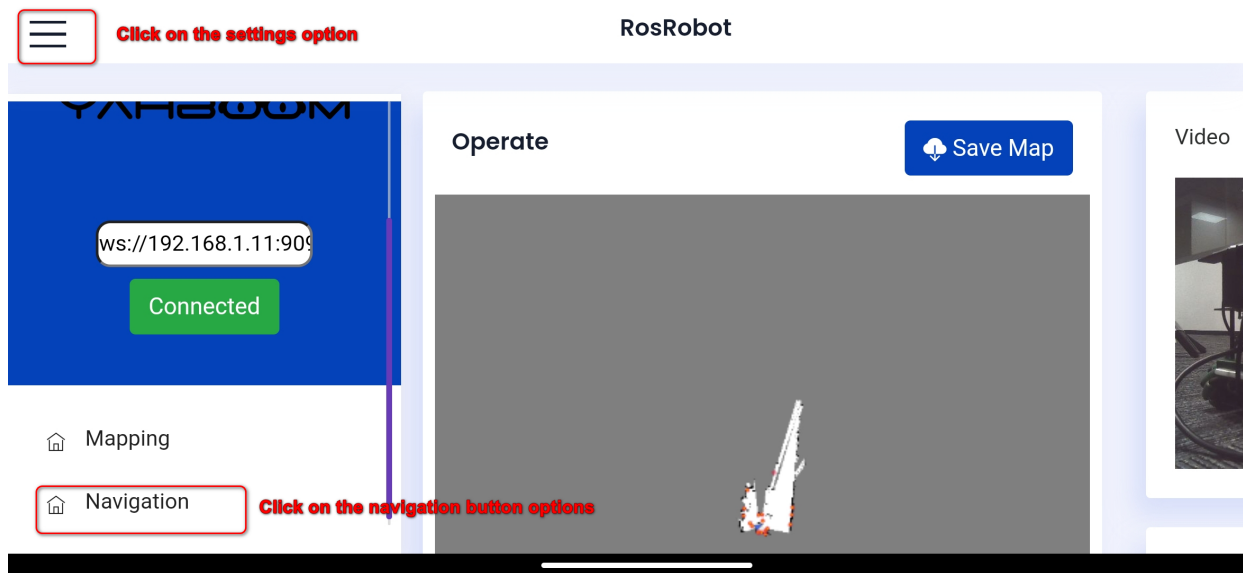


Click Set Initialization Point to enter the interface for setting initialization point.

Because the origin of the robot is not consistent with the current location of the robot when it is building the map, the scanned points do not coincide with the map. At this time, we need to set the initial pose of the robot. First, click the Set Initialization Point button, select the approximate position of the robot on the map, and keep sliding to the approximate pose of the robot without releasing it. Make the scanned points coincide with the map as much as possible.

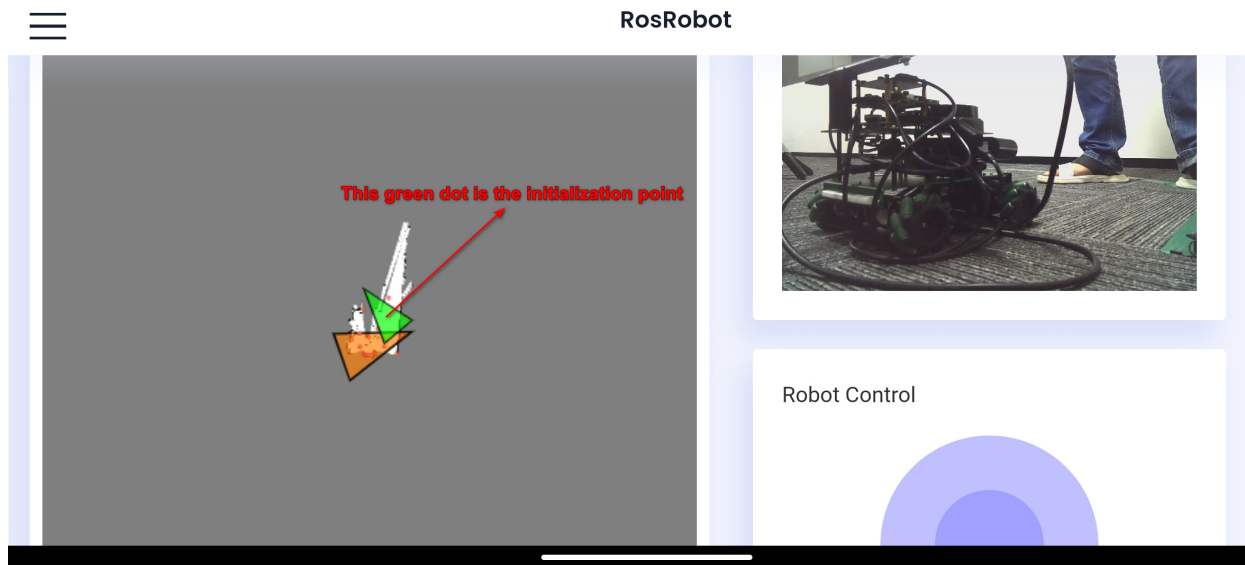

Click the Set Navigation Point button to enter the navigation interface.

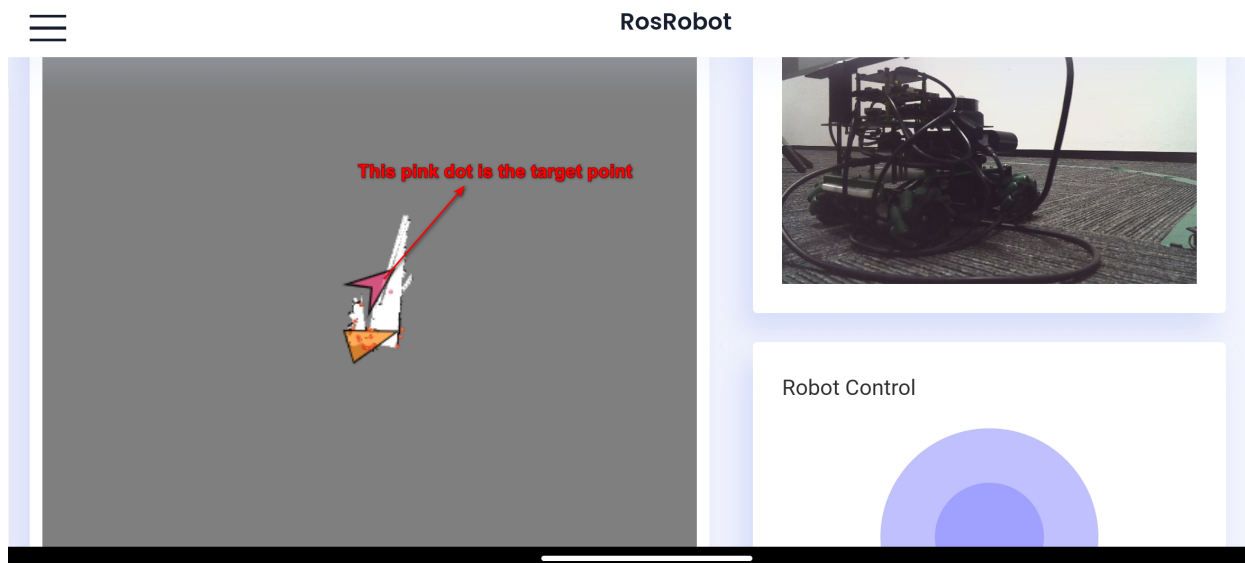

Select the target position of the robot on the map, do not release it, continue sliding towards the posture that the robot wants to maintain, and once released, the robot will move towards the target position.