Power supply instructions

1. Use the official adapter

- Power performance parameters

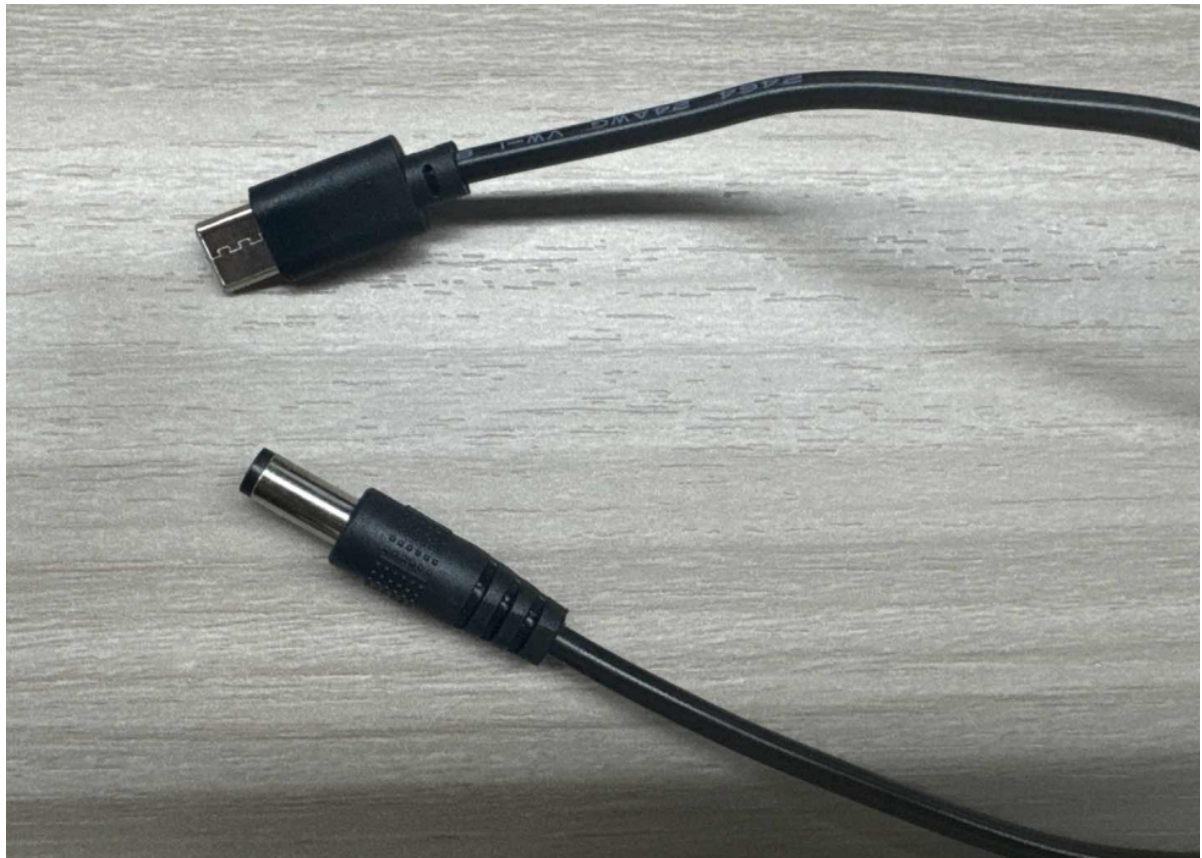| Item	Parameter
Power input	DC12V-2A (DC5.5x2.1mm)
Power	10W (typical)
Data interface	1 x USB-C 1X Ethernet (RJ45)
Wireless connection	WIFI
Weight	505g
Working temperature	0℃~40℃

- Official adapter wiring diagram

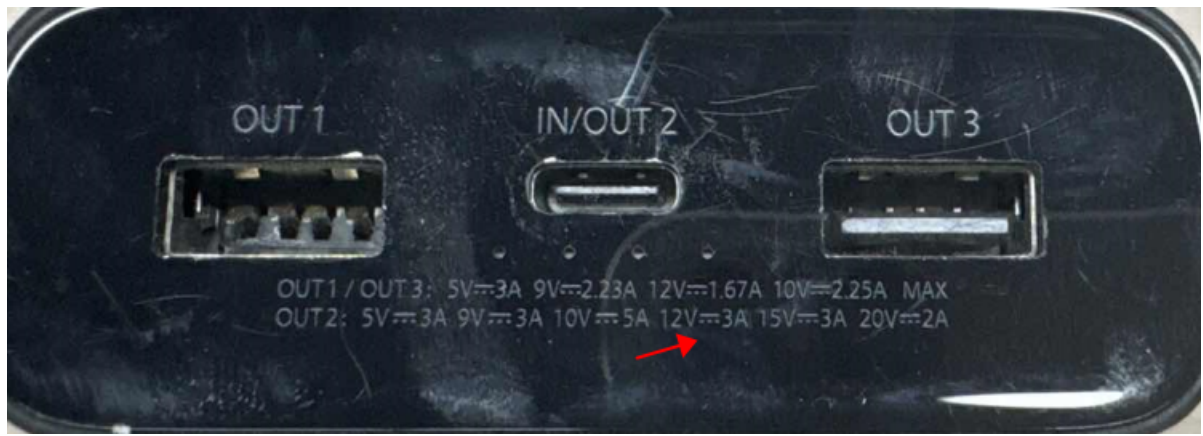Then check the indicator light and wait for the green light to be on, then you can build the map

2. Use the official PD protocol cable

The following figure shows the cable. If it is your own data cable, it must meet the 12VPD protocol.

At the same time, you also need a power plug or power bank that can provide a stable 12V power supply to the type-c and meet the pd protocol. The following figure uses a charging head that can output 12V and meet the pd protocol to power the Aurora radar.

Then check the indicator light and wait for it to be solid green.

This way you can create a map easily.