

Spider_Bluetooth_APP_control

In this lesson we will learn to use the Bluetooth APP to remotely control the building blocks spider.

1.Programming method:


Mode 1 online programming: First, we need to connect the micro:bit to the computer by USB cable. The computer will pop up a USB flash drive and click on the URL in the USB flash drive: <http://microbit.org/> to enter the programming interface. Add the Yahboom package <https://github.com/lzty634158/SuperBit> to program.

Mode 2 offline programming: We need to open the offline programming software. After the installation is complete, enter the programming interface, click 【New Project】 , add Yahboom package: <https://github.com/lzty634158/SuperBit>, you can program.

2.About wiring

We need to connect two building block motors to the M1 and M3 interfaces of the Super:bit expansion board.

The black wiring of the motor is near the battery side. As shown below.

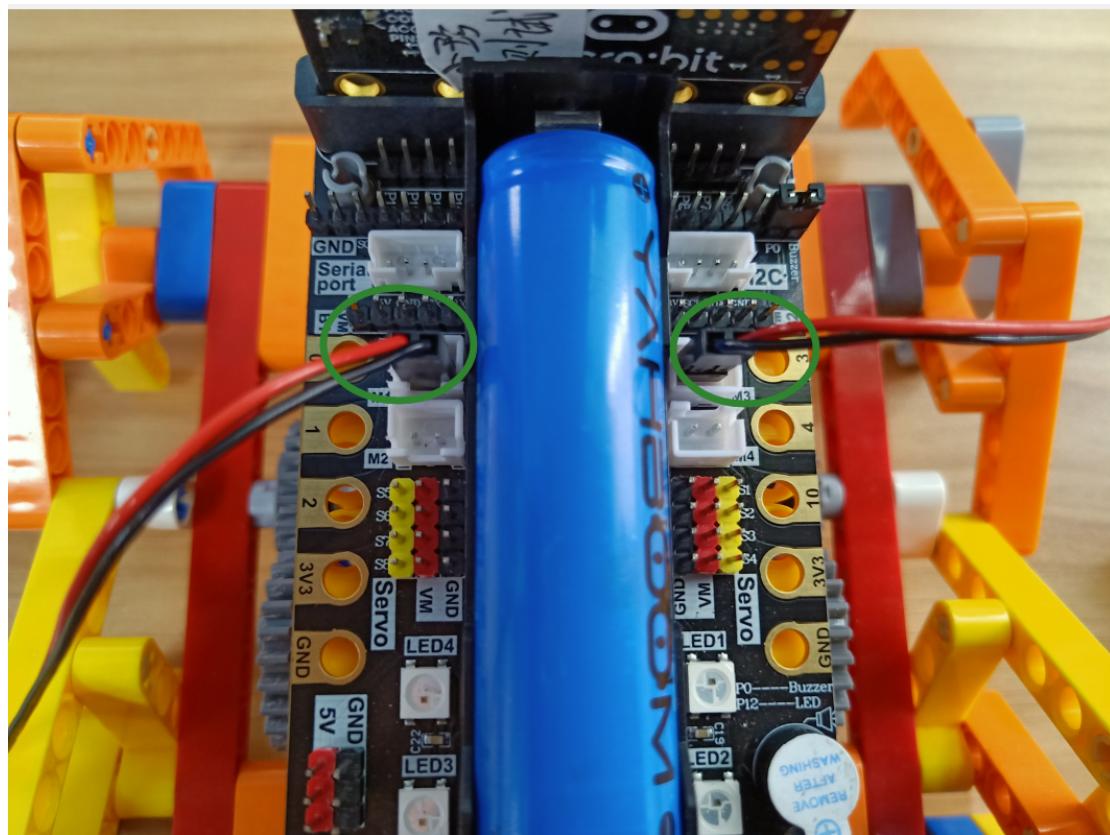

3.About code:

Please refer to the [microbit-Spider-Bluetooth-APP-control.hex](#) file of this experiment.

4.Download and install APP:

Android users scan the following QR code by browser or search "Mbit" in Play Store to download APP;

iOS users scan the following QR code by camera or search "Mbit" in App Store to download APP.



IOS



Android

After the download is complete, install it.

Note: If there are any prompts on the phone during installation, please select "Allow".

(for example, you need to obtain your mobile phone location permission.)

5.Steps:

5.1 First, we need to download the

[microbit-Spider-Bluetooth-APP-control.hex](#) to micro:bit of the Spider, you can see that the micro:bit dot matrix shows an "S" as shown in Figure 1.1, which is the state that Bluetooth is not connected.

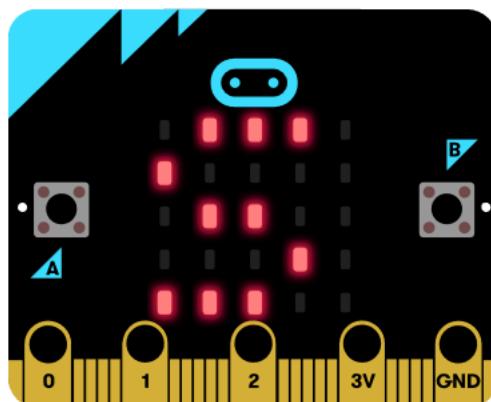


Figure 1.1

5.2 Open the Bluetooth of your mobile phone, and open the Bluetooth APP, Mobile phone close to robot Bluetooth automatic connection. If Bluetooth can't

connect automatically, you need to click 【CONNECT】to connect the Bluetooth between the phone and the robot. As shown in Figure 1.2

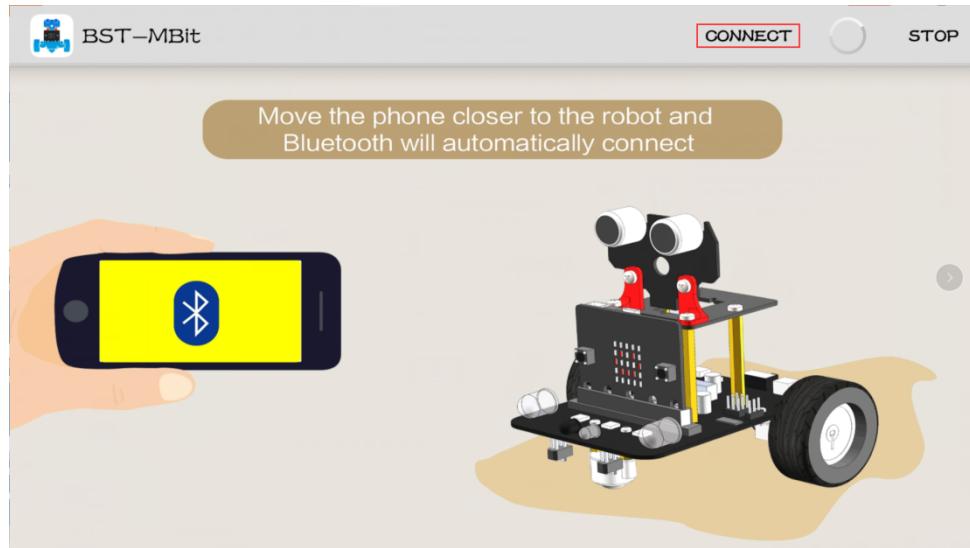


Figure 1.2

5.3 When the APP interface is switched to the screen shown in Figure 1.3, and the robot's dot matrix is switched to the pattern shown in Figure 1.4, the connection is successful and the next operation can be performed.

If Bluetooth is disconnected, micro:bit will display the pattern of Figure 1.5.

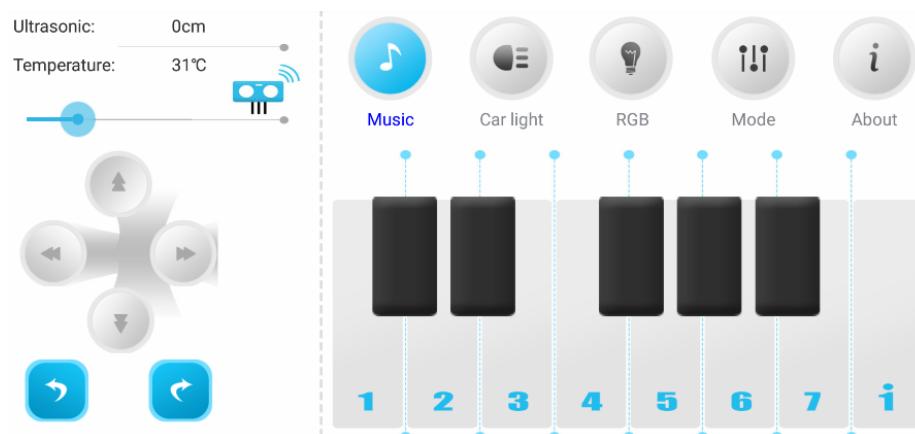


Figure 1.3

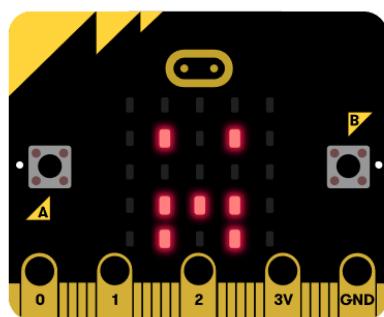


Figure 1.4



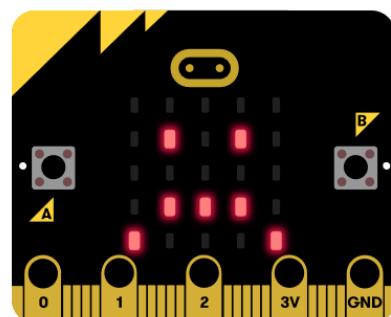


Figure 1.5


6. About APP interface:

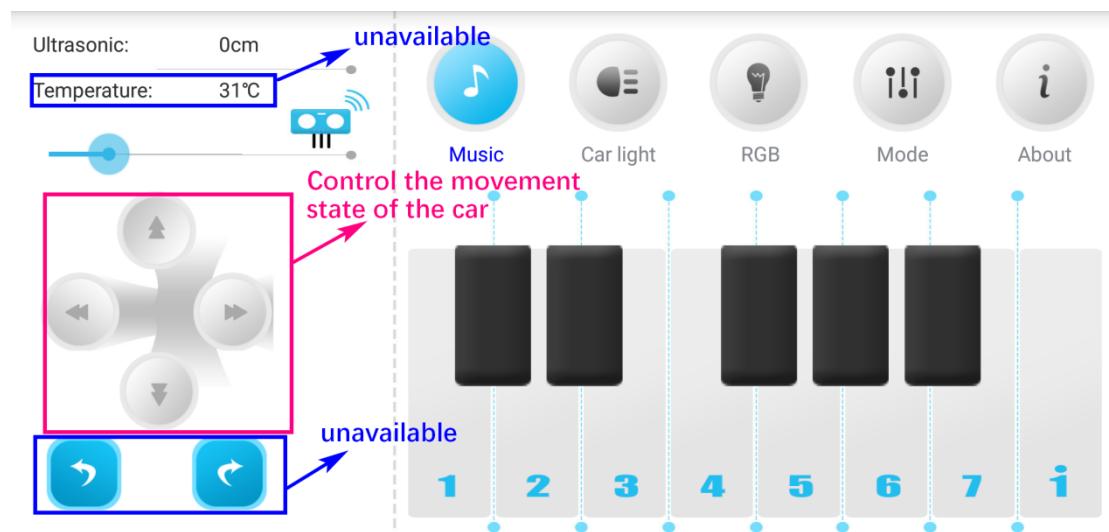


6.1 Music

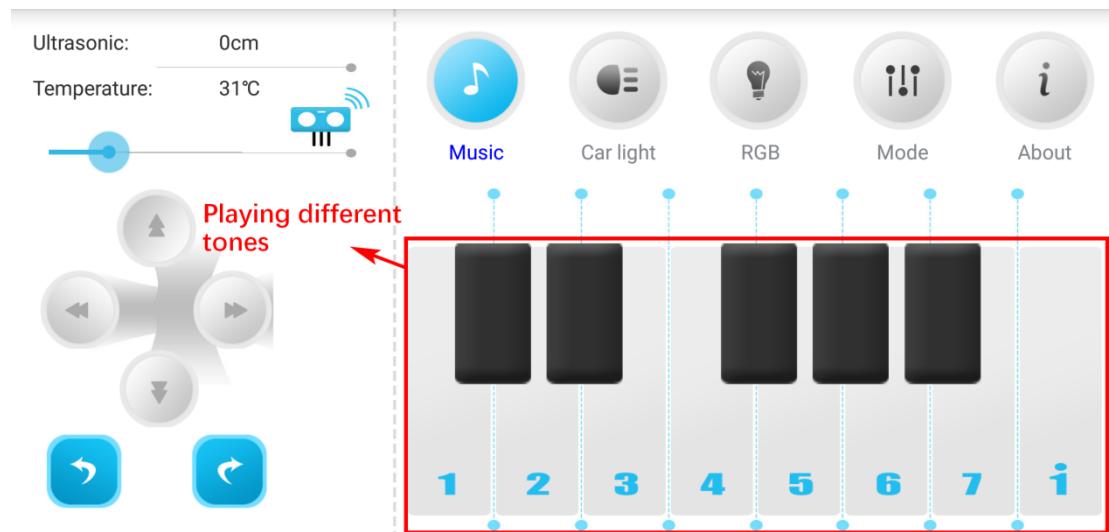

6.2 Car light

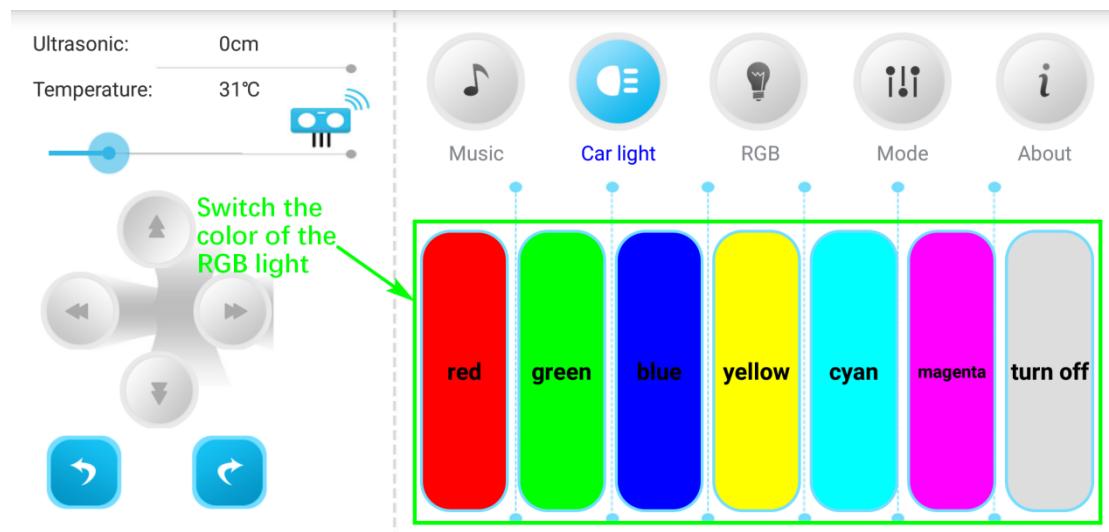

6.3 RGB

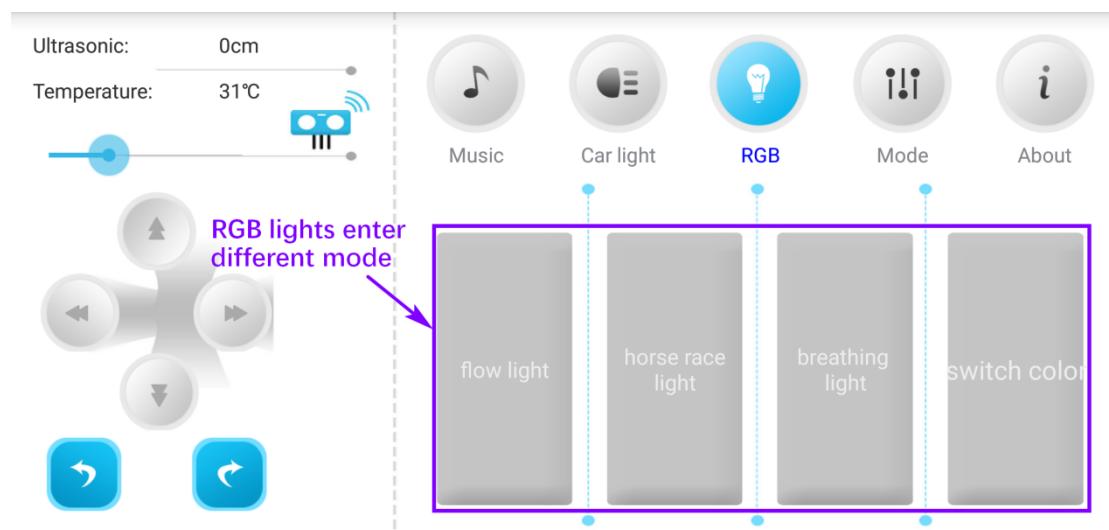

!!!Note: Mode option is not available.