

# WiFi network configuration

---

WiFi network configuration

- 1、 Install APP
- 2、 Connect network
- 3、 Deleting the hotspot
- 4、 Precautions

## 1、 Install APP

Android users search "YahboomRobot" in Play Store or enter tutorial link on the homepage to download APP.


iOS users search "YahboomRobot" in App Store to download APP.



## 2、Connect network


***If the phone need to obtain any permission, please click "ALLOW".***

Open YahboomRobot APP, choose [ROS Robot]--[TRANSBOT]. Click the [Network configuration] button in the upper right corner of the [Connecting] interface.

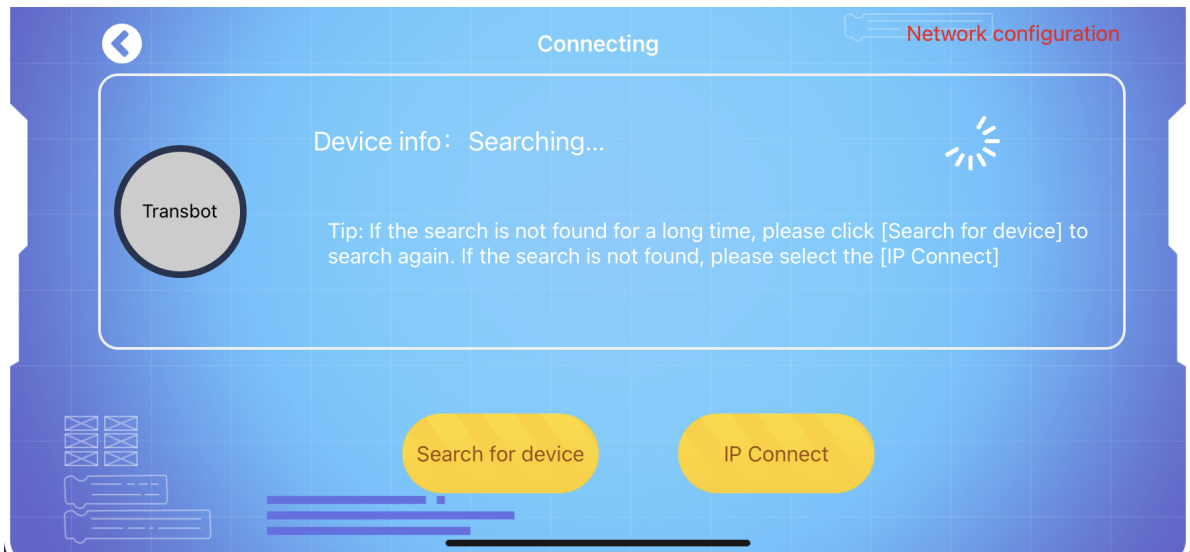


Step 2. After turning on the power of Transbot SE, wait for the system startup to complete (the buzzer beeps three times in succession), press and hold the K1 button on the expansion board for about 2 seconds to enter the WiFi network configuration mode.

At this time, the WiFi indicator flashes and the buzzer keep beeps , Click [Next].

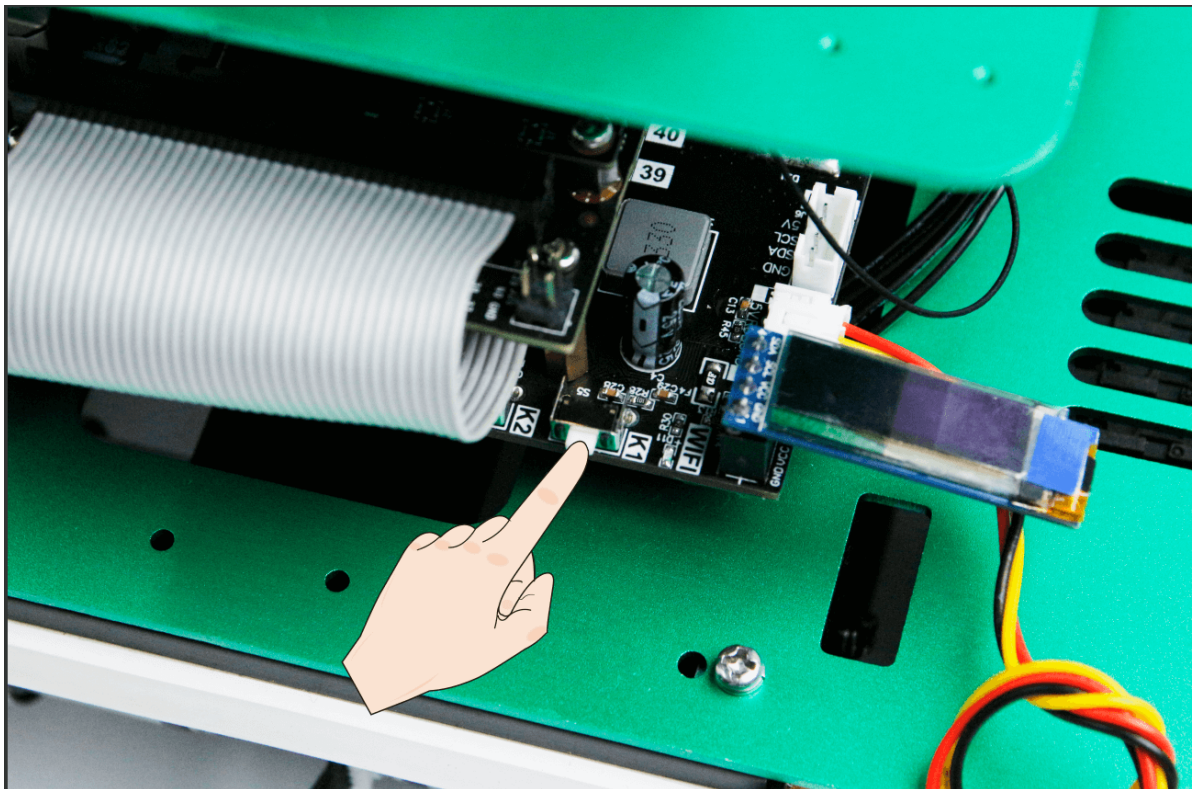

Step 3. If the current WiFi name is not displayed or displayed incorrectly, please click [Refresh]. If the WiFi is not currently connected, please click the [WiFi] button to enter WiFi connection interface on your phone.


Then, back to APP and input password of the WiFi connected to the mobile phone, click the [Connect] button to enter the next step.

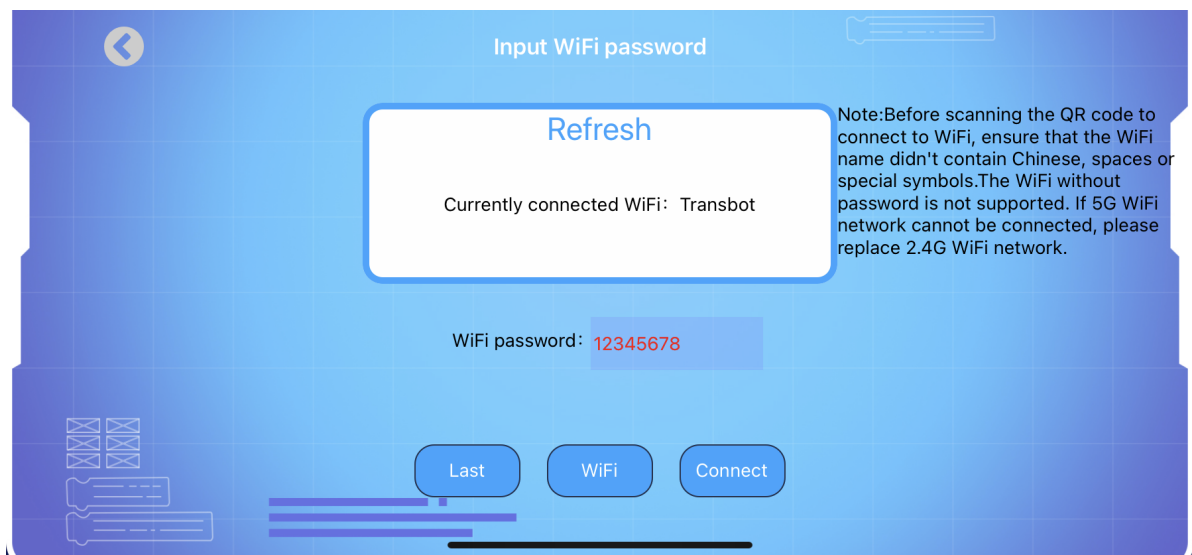

Step 4. At this time, the APP will automatically generate a QR code picture that records the WiFi information. As shown in the figure below, please place this QR code about 20 cm in front of the camera. Waiting for a long beep from the buzzer means that the QR code information has been read, and you can remove the phone at this time. Wait for the buzzer to beep three times in succession.


If the WiFi indicator keeps on, which means the connection is successful, and if it is off, the connection fails.

If the connection fails, please check the QR code information and router signal, and then long press the K1 button again to enter the network configuration mode and reconnect.

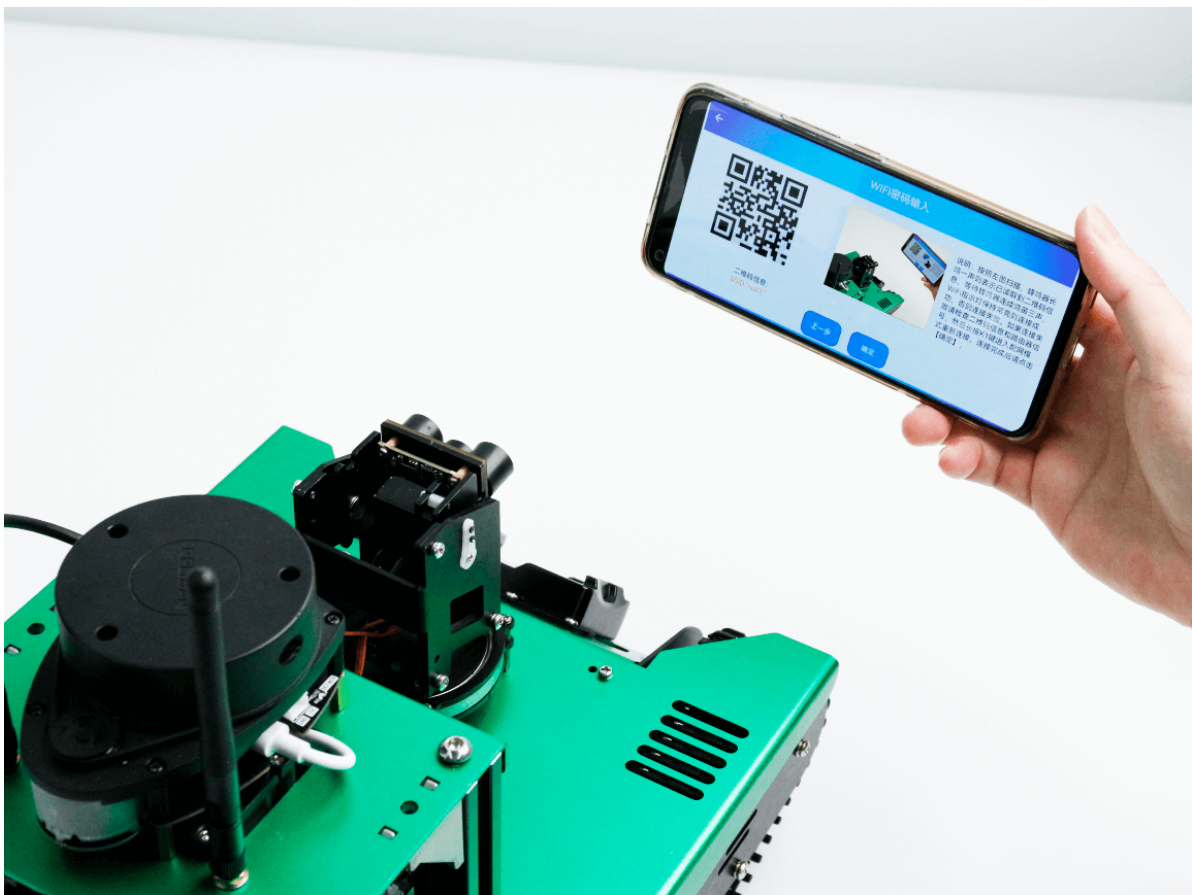

Step 5. Click [OK]. We can IP address on OLED.



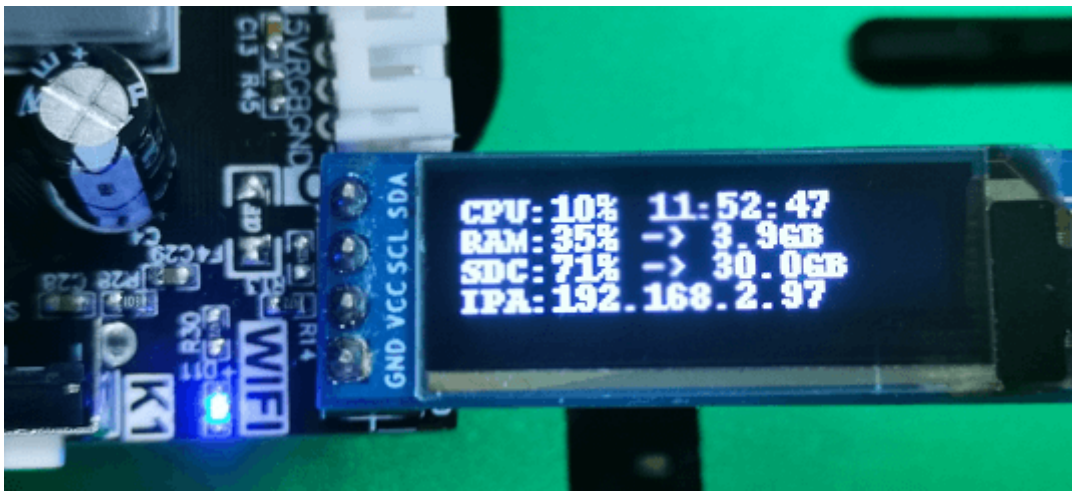


### 3、Deleting the hotspot


If the Transbot SE is still connected to the hotspot after the network distribution is completed and the Transbot SE is restarted. You can delete the hotspot completely and reconfigure the network.

The procedure for deleting a hotspot is as follows:

- 1、 First go to the car system, click on the wifi icon in the top right corner, then there will be a drop-down option, select Edit Connections... ;

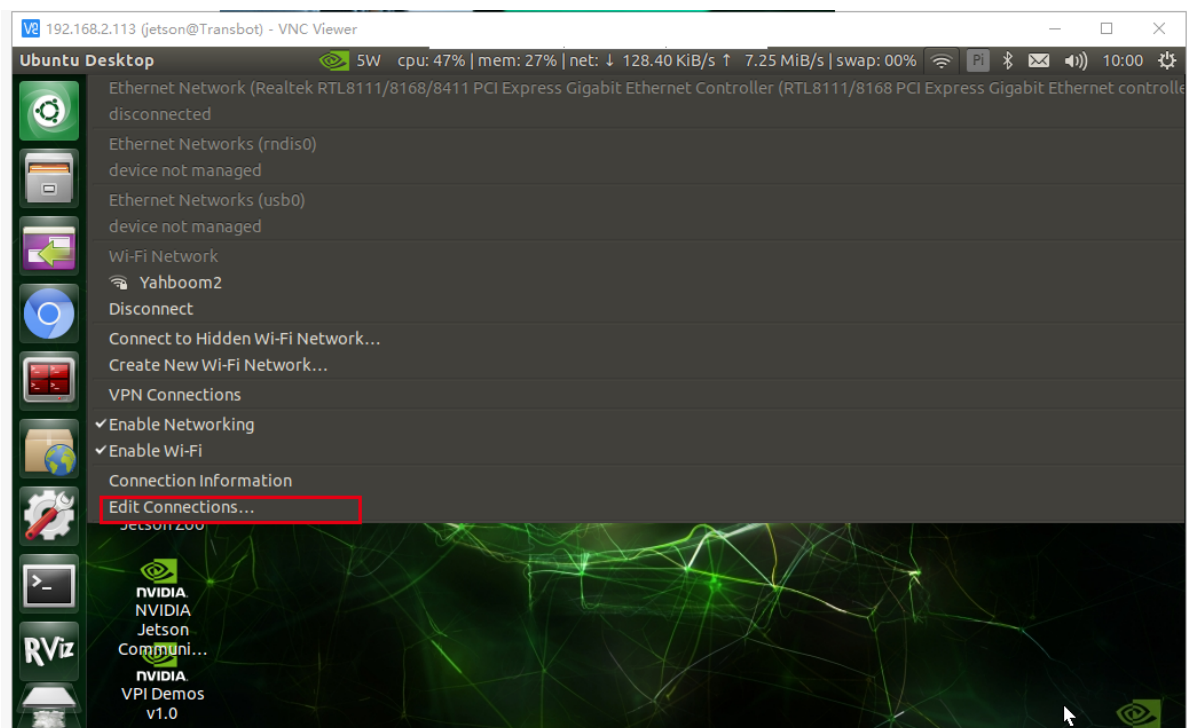

- 2、 Find the name of the hot spot, and then click the bottom row of the box '-';

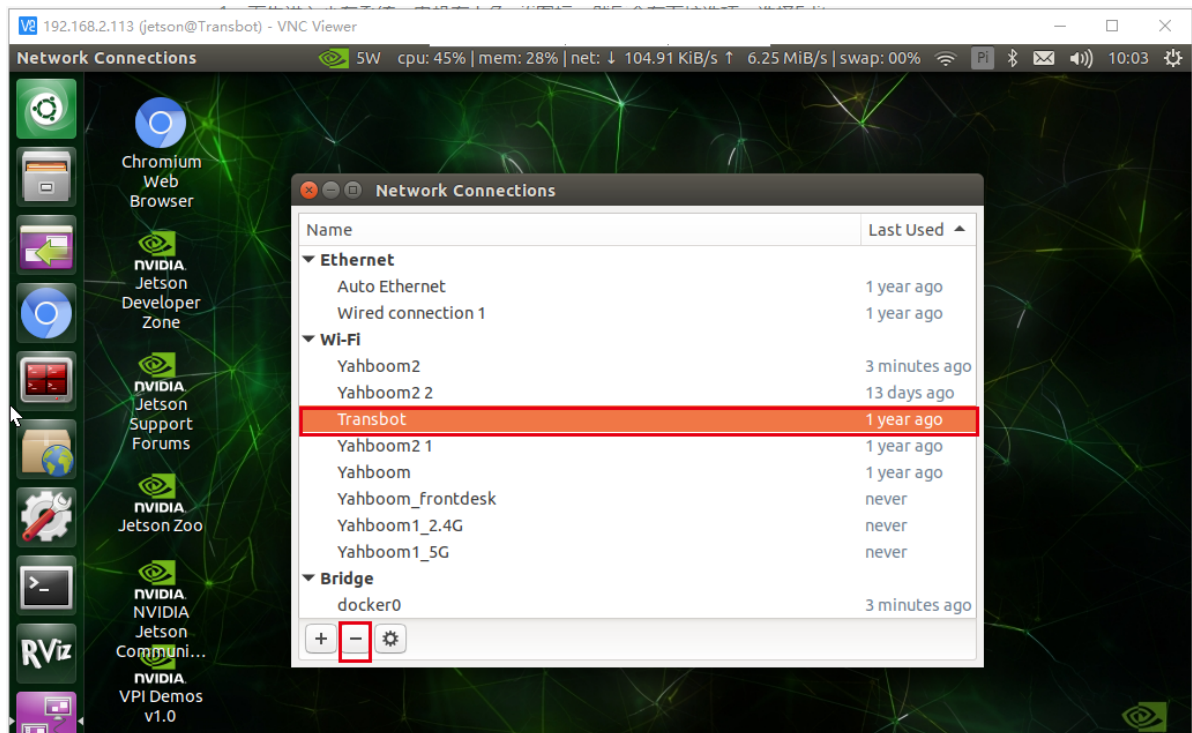

## 4、Precautions

① The WiFi network configuration function of the camera can only be used when the Transbot SE APP process is started normally.

② If Transbot SE is currently connected to a WiFi network, and then use the camera WiFi network configuration function, you can also switch the WiFi network normally, but because the IP address needs to be assigned before ROS is started, some functions may be abnormal, please restart Transbot.

If the QR code WiFi information is wrong, it will cause the new WiFi network connection to fail and automatically connect back to the original WiFi network.

③ Please do not have Chinese or special symbols in the WiFi signal, otherwise it may cause abnormal connection.