

Camera Parameters

Camera Parameters

- 30W Pixel AI Vision Camera
- 100W Pixel AI Vision Camera
- 200W Pixel AI Vision Camera
- 5MP AI Vision Camera

30W Pixel AI Vision Camera

300,000 pixels AI vision camera



Lens plan	CMOS
Image Sensor	1/6.5inch GC0307 sensor
Lens	F6mm
Picture pixels	300,000
Image format	YUV
Resolution	240p/480p
Max frame rate	30fps
FOV (diagonal)	50°
Distortion	No
USB	USB2.0 No need drive
Camera size	30*25*30.35mm

Product Size Unit: mm



Shipping List



300,000 pixels (50° FOV)



Data cable
(cable length: 50cm)

100W Pixel AI Vision Camera

1,000,000 pixels AI vision camera



100W Pixel AI Vision Camera




Lens plan	Cmosm
Image Sensor	1/4inch H62
Lens	F2.8mm
Picture pixels	1,000,000
Image format	YUV/MJPG
Resolution	240p/480p/720p
Max frame rate	30fps
FOV (diagonal)	120°
Distortion	-10%
USB	USB2.0 No need drive
Camera size	32.15*32.15*28.4mm

Product Size

Unit: mm

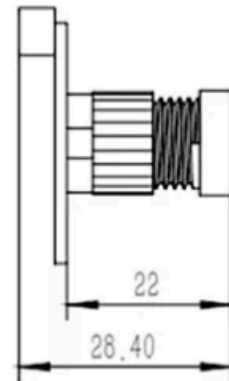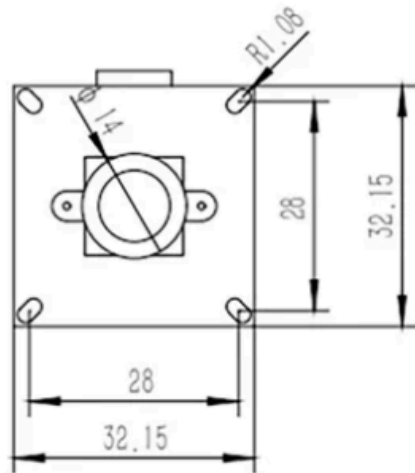

Shipping List



1,000,000 pixels (120° FOV)



Data cable
(cable length: 40cm)

200W Pixel AI Vision Camera



2,000,000 pixels AI vision camera



Lens plan	Cmosm
Image Sensor	1/2.7inch OV2710
Lens	F2.8mm
Picture pixels	2,000,000
Image format	YUV/MJPG
Resolution	240p/480p/720p/1080p
Max frame rate	120fps
FOV (diagonal)	148°
Distortion	-17%
USB	USB2.0 No need drive
Camera size	32.6*32.6*28mm

Product Size

Unit: mm

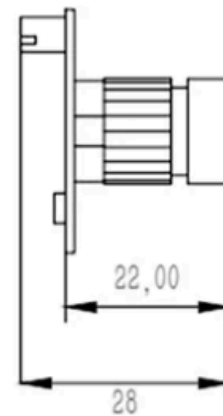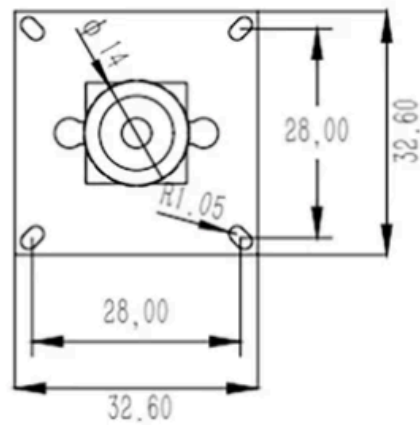

Shipping List



2,000,000 pixels (148° FOV)



Data cable
(cable length: 30cm)

5MP AI Vision Camera





Motherboard Model	BL-500W-335		
Sensor/Size	1/2.8inch		
Pixel Size	2.0μm*2.0μm		
Signal-to-Noise Ratio	40dB		
Low Illumination	0.001Lux		
Dynamic Range	70dB		
Exposure Time	35ms		
Output Format	MJPEG/YUY2		
Supported Protocols	Standard UVC communication protocol, supports OTG conversion		
FF	Fixed focus		
Maximum Effective Pixel	2592*1944		
Output Image Format	MJPEG、YUV (YUY2)		
Resolution and Frame Rate	resolution	MJPEG	YUY2
	2592*1944	30fps	5fps
	2048*1536	30fps	2fps
	1920*1080	30fps	2fps
	1280*1024	30fps	2fps
	1280*960	30fps	5fps
	1280*720	30fps	5fps
	1024*768	30fps	10fps
	800*600	30fps	15fps
	640*480	30fps	30fps
	320*240	30fps	30fps
Automatic Exposure Control	Support		
AWB	Support		
Adjustable Parameters	Brightness, contrast, hue, saturation, sharpness, gamma, white balance, backlight contrast, gain, exposure, scrolling, low brightness compensation.		
Lens Parameters	Focal length: 2.8mm D: 105° H: 81.8° V: 66°		
Interface Type	USB2.0		
Power Supply Mode	5V		
Working Current	≤160mA		
Working Temperature	-10°C~70°C		
Storage Temperature	-20°C~85°C		
Board Size	38*38mm		
Repuested Systems	WinXP/Vista/Win7, 8, 10, 11, etc. Linux with UVC (above linux -2.6.26) MAC-OS X 10.48 or later Wince with UVC Android 4.0 or above with UVC		
Length	90cm		
Dimensions	43mm*43mm*44.35mm (without bracket) 50.66mm*43mm*187.8mm (with bracket)		

Weight	157.4g (without bracket) 304.9g (with bracket)
--------	---

Specifications

Unit: mm

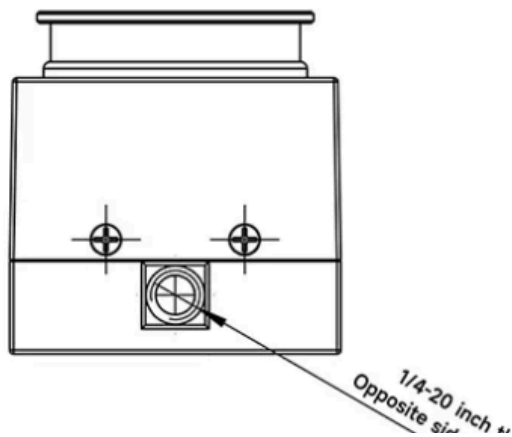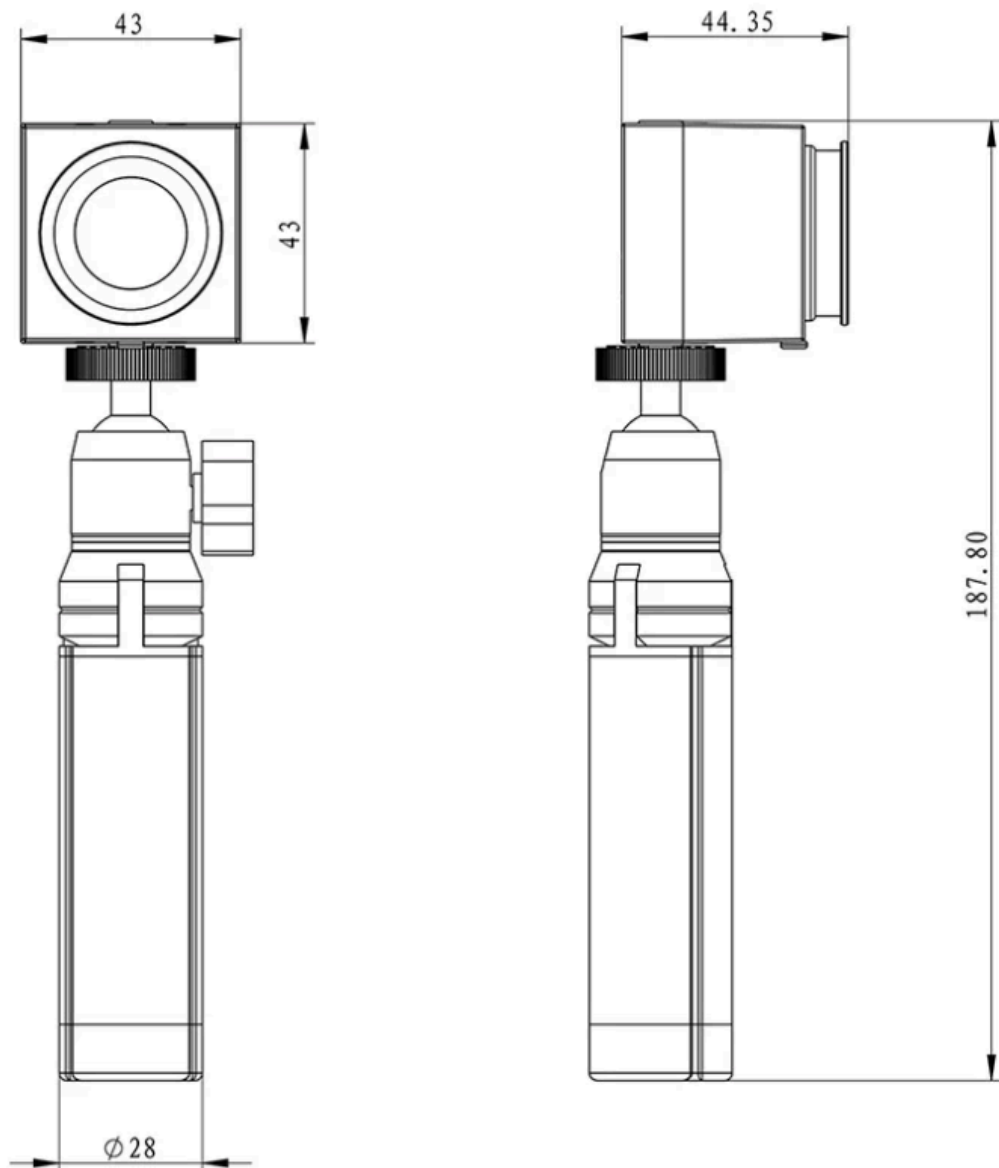

...read
...es consistent