

# MSPM0\_K210 QR code recognition

## 1. K210 communicates with MSPM0

### 1.1 Experimental prerequisites

This tutorial uses the MSPM0G3507 development board. K210 needs to run the program in **K210-AI(MSPM0G3507)** to start the experiment

MSPM0G \*1

K210 visual module \*1 (must have an SD card (with AI models), camera)

USB to TTL module \*1


### 1.2 Experimental wiring

Method 1: Use USB to TTL module


MSPM0G	K210 visual module
RX	TXD
GND	GND
VCC	5V

MSPM0G	USB to TTL module
TX	RXD
GND	GND

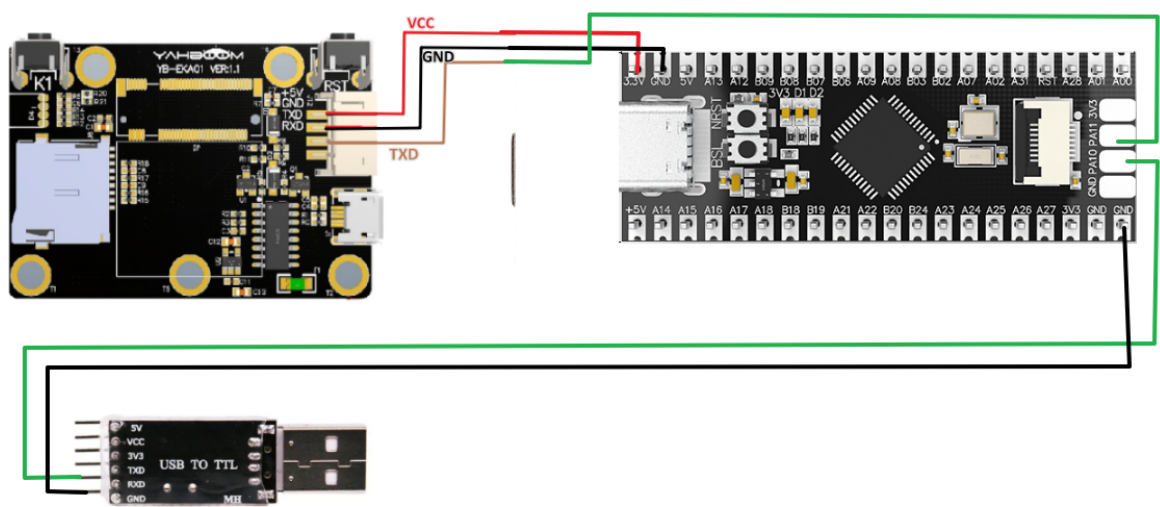

Method 2: Use the onboard Type-C port

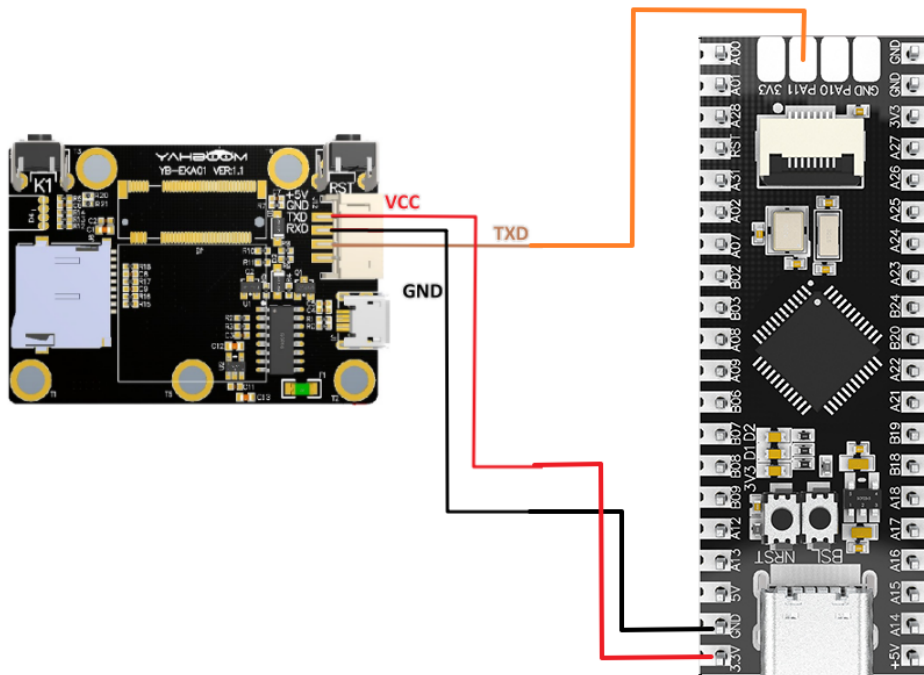

## 1.3 Main code explanation

This example sets the baud rate of the serial port printing to 115200 bps, and the baud rate of the k210 module connection is set to 115200 bps.

Software > UART

UART (2 of 4 Added) ADD REMOVE ALL

- ☒ MYUART copy trash
- ☒ K210\_Uart copy trash

Name: MYUART

Selected Peripheral: UART0

Quick Profiles

UART Profiles: Custom

Basic Configuration

UART Initialization Configuration

Clock Source	BUSCLK
Clock Divider	Divide by 1
Calculated Clock Source	32.00 MHz
Target Baud Rate	115200
Calculated Baud Rate	115211.52
Calculated Error (%)	0.01
Word Length	8 bits
Parity	None
Stop Bits	One
HW Flow Control	Disable HW flow control

Type Filter Text...
X
<<
<
>
Software
UART

PROJECT CONFIGURATIO...

Project Config... 1/1 ✓ +

MSPM0 DRIVER LIBRARY ...

SYSTEM (9)

Board 1/1 ✓ +

DMA +

GPIO +

MATHACL +

Configuration NVM +

RTC +

SYSCCTL 1/1 ✓ +

SYSTICK 1/1 ✓ +

WWDT +

ANALOG (6)

ADC12 +

COMP +

DAC12 +

GPAMP +

OPA +

VREF +

COMMUNICATIONS (6)

I2C +

I2C - SMBUS +

MCAN +

SPI +

UART 2/4 ✓ +

UART - LIN +

TIMERS (6)

TIMER - CAPTURE +

TIMER - COMPARE +

UART (2 of 4 Added) ②

MYUART

K210\_Uart

Name

K210\_Uart

Selected Peripheral

UART1

Quick Profiles

UART Profiles

Custom

Basic Configuration

UART Initialization Configuration

Clock Source

BUSCLK

Clock Divider

Divide by 1

Calculated Clock Source

32.00 MHz

Target Baud Rate

115200

Calculated Baud Rate

115211.52

Calculated Error (%)

0.01

Word Length

8 bits

Parity

None

Stop Bits

One

HW Flow Control

Disable HW flow control

```

int main(void)
{
    SYSCFG_DL_init();

    NVIC_ClearPendingIRQ(MYUART_INST_INT_IRQN); //清除串口中断标志 clear the serial
    port interrupt flag
    NVIC_EnableIRQ(MYUART_INST_INT_IRQN); //使能串口中断 Enable serial port
    interrupt

    while (1)
    {
        if (k210_msg.class_n != 0) //例程号不为空 Routine number is not empty
        {
            if (k210_msg.class_n == 3)
            {
                sprintf(buff_com, "x=%d,y=%d,w=%d,h=%d\r\n", k210_msg.x, k210_msg.y, k210_msg.w, k210
                _msg.h);

                uart0_send_string(buff_com);

                sprintf(buff_com, "str = %s\r\n", k210_msg.msg_msg);
                uart0_send_string(buff_com);

                k210_msg.class_n = 0;
            }
        }
    }
}

```

```

    }

    }
    delay_ms(500);

}
}

```

After the above program, if this routine is run, the members of the k210\_msg structure will have corresponding values and will be processed through the serial port printing

k210\_msg: is the structure for receiving information, and its main members are

- x: is the horizontal coordinate of the upper left corner of the identified box (range: 0-240)
- y: is the vertical coordinate of the upper left corner of the identified box (range: 0-320)
- w: is the width of the identified box (range: 0-240)
- h: is the length of the identified box (range: 0-320)
- id: is the identified label
- class\_n: routine number
- msg\_msg[20]: valid data

After the data is received and processed by the function, each member of k210\_msg will store valid information. If you want to perform secondary development, you can directly call the members of k210\_msg


**Note: The keil project source code must be compiled under the SDK path.**

## 1.4 Experimental Phenomenon

1. After connecting the cable, the K210 perspective module runs offline. Please check 【6.2 K210 as coprocessor】 -- 【ReadMe】

Link:<http://www.yahboom.net/study/K210-AI-Camera>

2. The serial port assistant is set to the interface as shown in the figure

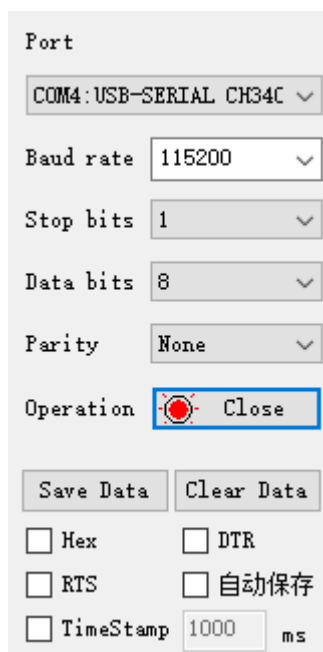

3. Then run the QR code recognition routine, and the serial port assistant will print out the important information transmitted by k210 to MSPM0G, as shown in the figure below

```
x=35, y=0, w=198, h=195
str = hello world
x=34, y=1, w=195, h=195
str = hello world
x=32, y=7, w=195, h=197
str = hello world
x=37, y=8, w=192, h=191
str = hello world
x=39, y=9, w=193, h=192
str = hello world
x=42, y=11, w=188, h=192
str = hello world
x=43, y=10, w=189, h=190
str = hello world
x=43, y=12, w=189, h=187
str = hello world
x=55, y=19, w=187, h=189
str = hello world
x=60, y=22, w=187, h=188
str = hello world
x=61, y=23, w=186, h=189
str = hello world
x=61, y=26, w=184, h=185
str = hello world
x=60, y=24, w=185, h=187
str = hello world
x=56, y=21, w=190, h=185
```

The QR code recognition only transmits the five member variables x, y, w, h, msg of k210\_msg.