

Microbit_ K210 barcode recognition

1.K210 and microbit communication

1.1 Experimental premises

This tutorial uses microbit V2.0, and K210 requires running the program in * * K210-AI (microbit) * * to start the experiment

Microbit * 1

Eyu clip * 3

Several DuPont Lines

K210 perspective module * 1 (requires SD card (with AI model inside) and camera)



USB to TTL module * 1

Import k210AI library: <https://github.com/YahboomTechnology/K210-Module>


1.2 Experimental wiring

microbit	USB to TTL module
P1	RXD
GND	GND

microbit	k210
P2	TXD
GND	GND
Wiring as shown in the diagram:	

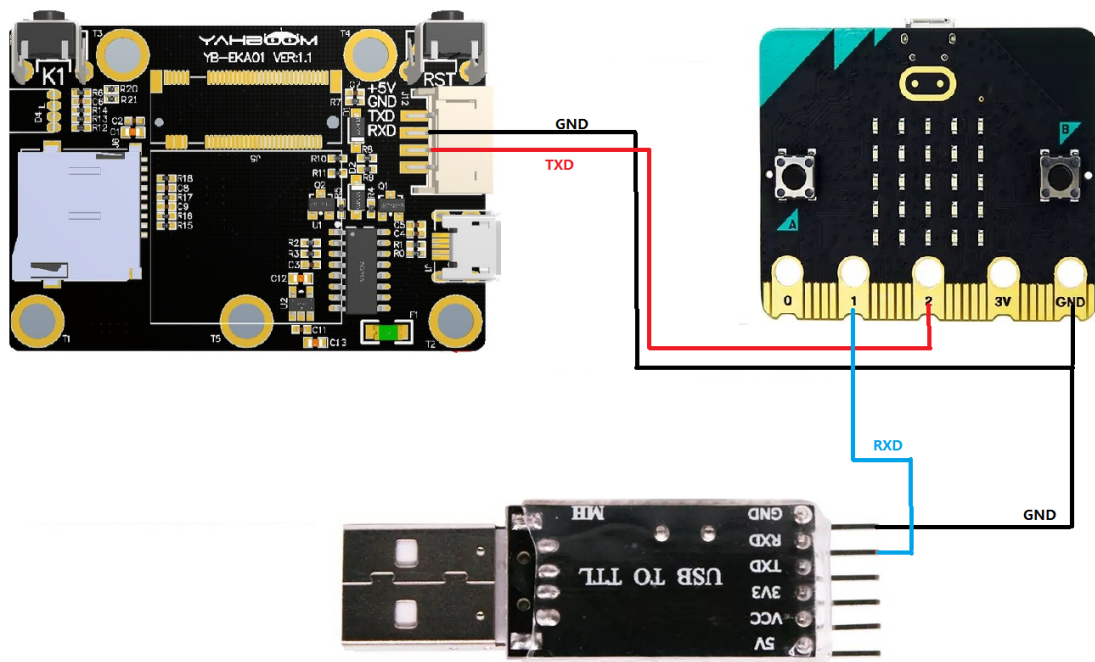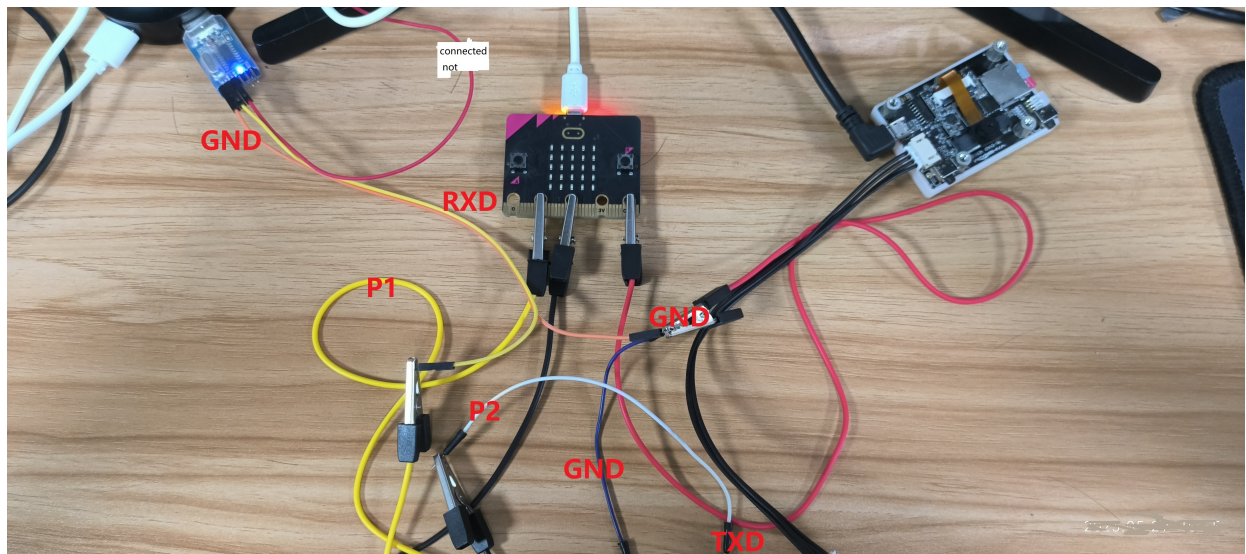

1.3 Main code analysis

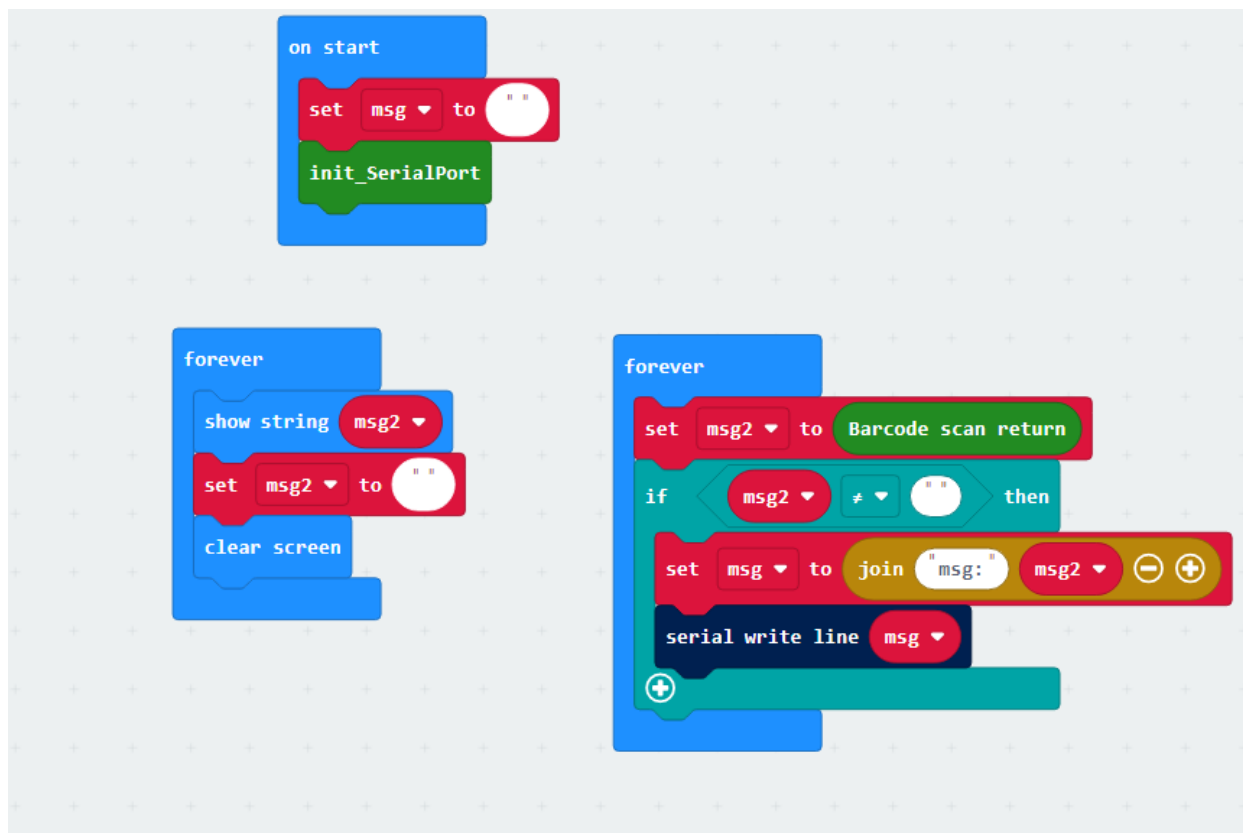

From the code, simply configure the serial port and call the relevant serial port and K210 building blocks for data acquisition

- msg:Identify the content of barcodes

1.4 experimental phenomena

1. After connecting the cable, the K210 perspective module runs offline. Please check 【6.2 K210 as coprocessor】 -- 【ReadMe】

2. Set the serial port assistant to the interface shown in the figure

COM Configs

Channel	COM1 #
Baudrate	115200
Paritybits	NONE
Databits	8
Stopbits	1
Flowctrl	NONE

 Close

Recv Options

☒ ASCII ☐ HEX

☒ Log display mode

☒ Auto linefeed

☐ Hide received data

☐ Recv save to file...

[AutoScroll](#) [Clear](#)

Send Options

☒ ASCII ☐ HEX

☒ Enable escape chars

☒ AT CMD auto CRLF

☐ Auto append bytes

☐ Send from file ...

☐ Period ms

[Shortcut](#) [History](#)

3. Download the hex program of this tutorial into microbit
4. After starting recognition, you can see that the serial assistant prints something and the microbit screen also scrolls to display the received information. The experimental results in the following figure show the phenomenon of barcode recognition

[illegible]

This experiment displays the identified content of barcode recognition

1.5 Microbit calls the building blocks to parse the results of K210, and the roles of each block

Website of K210 library: <https://github.com/YahboomTechnology/K210-Module>

