


Controller Parameters

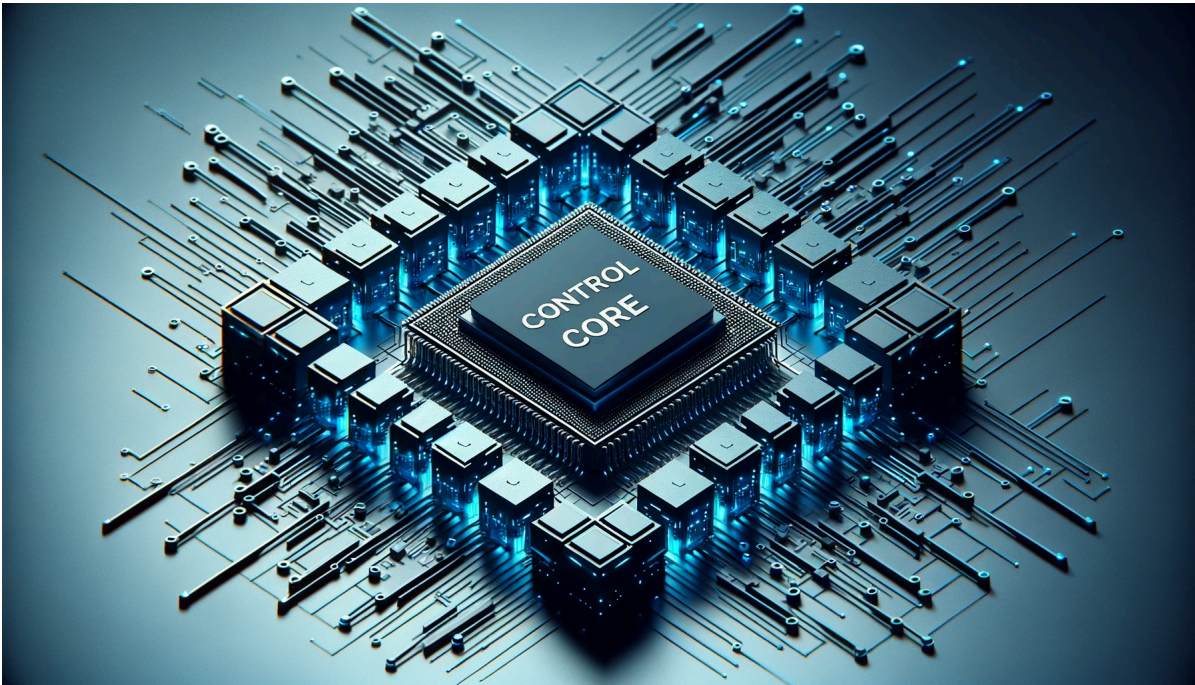

1 Main Controller Specifications

index	parameter
Master Control	M5Stack-basic
Main control model	ESP32
CPU	240MHz dual core. 600 DMIPS, 520KB SRAM. Wi-Fi, dual-mode Bluetooth
Bluetooth	2.4G/5G
wireless	2.4G 3D Antenna
enter	IN1, IN2, IN3, IN4, IN5, IN6
Output	OUT1, OUT2, OUT3, OUT4, OUT5, OUT6

2 Auxiliary Controller 1 Specifications

index	parameter
Auxiliary control	Atom
Auxiliary control model	ESP32
Auxiliary controller core parameters	240MHz dual core. 600 DMIPS, 520KB SRAM. Wi-Fi, dual-mode Bluetooth
Auxiliary controller flash	4MB

index	parameter
LCD Display	2.0"@320*240 ILI9342C IPS panel, maximum brightness 853nit
Type C	*1

3 Auxiliary Controller 2 Specifications

index	parameter
Auxiliary control	Pico
Auxiliary control model	ESP32
Auxiliary controller core parameters	240MHz dual core. 600 DMIPS, 520KB SRAM. Wi-Fi, dual-mode Bluetooth
Auxiliary controller flash memory	4MB
TypeC	*1