




INOS Watcher

Installation and
Environmental Guidelines


digis²

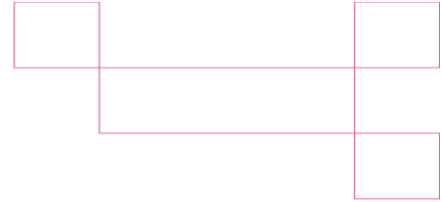

To support different deployment environments, the Digis Squared INOS Watcher is available in two enclosure configurations.

IP66 – Active Cooling Version	IP68 – Sealed Version
Optimized for outdoor deployments where elevated ambient temperatures require active thermal management.	Intended for deployments where protection against temporary or prolonged immersion is the primary requirement and ambient temperatures remain within the specified operating range.



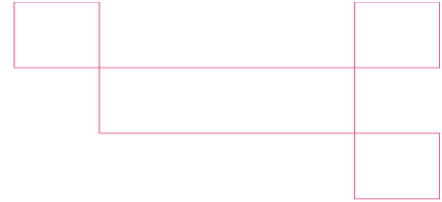

IP66 – Active Cooling Version

Designed Operating Environment

The IP66 Active Cooling version is designed for outdoor deployments exposed to:


- Ambient temperatures up to 55°C.
- Heavy rainfall and wind-driven rain.
- Typhoon weather conditions.
- High humidity.
- Dust and airborne particles.
- Snow and ice.

Installation Requirements

To ensure reliable operation and achieve the intended environmental and thermal performance, the following installation requirements shall be observed:

- Install the probe above the maximum expected flood level defined for the installation site by the applicable local authority or site-specific flood risk assessment.
- Install the probe in a shaded location to minimize solar heat gain and maximize thermal performance.
- Ensure a minimum clearance of 100 mm around the air intake and exhaust openings to allow unrestricted airflow.
- Do not install the probe where the air intake or exhaust openings may be obstructed by walls, vegetation, debris, or other equipment.
- Ensure the mounting structure can support the probe under the maximum expected wind loading for the installation location.
- Install the probe in accordance with all applicable local electrical, structural, and safety regulations.

Proper installation is essential to maintain the enclosure's IP66 protection, cooling efficiency, and long-term operational reliability.

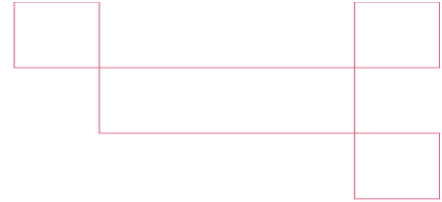

Flood Recovery and Service Procedure

The information provided in this section is intended as technical guidance to assist with recovery following exceptional flooding events and to illustrate the serviceability of the INOS Watcher platform. It does not replace or limit the support, warranty, or maintenance services provided by Digis Squared.


All technical support, repair, replacement, and warranty obligations shall be provided in accordance with the applicable commercial agreement, maintenance contract, or warranty terms agreed between Digis Squared and the customer.

The IP66 Active Cooling version is designed to withstand severe outdoor weather conditions, including heavy rainfall, wind-driven rain, and powerful water jets. **It is not intended for momentary or prolonged immersion.**

If the probe becomes submerged due to an exceptional flooding event:

- Remove the probe from service as soon as it is safe to do so.
- Do not re-energize the unit until service is done.
- Thoroughly clean and dry the enclosure and internal components to remove mud, debris, and contaminants.
- Inspect all connectors and wiring for signs of corrosion.
- Replace the cooling fans, power supply, and cellular router, as they are considered serviceable components following immersion.
- Inspect and verify the operation of the phones before returning the probe to service.

The enclosure is expected to remain structurally intact, and the internal communication modules are individually housed in IP68-rated enclosures, providing an additional level of protection against water ingress. Consequently, in most flooding scenarios, recovery is expected to consist of inspection, cleaning, drying, and replacement of affected serviceable components rather than replacement of the complete probe.

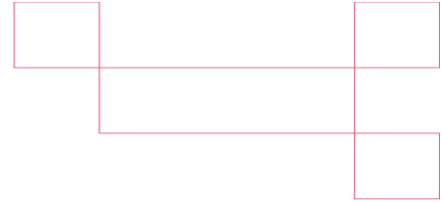

IP68 – Sealed Version

Intended Deployment

The IP68 Sealed version is intended for deployments where maximum environmental protection is required, and ambient temperatures remain sufficiently low to allow reliable operation without active cooling.

Typical applications include:

- Flood-prone areas.
- Coastal installations.
- Any deployment where temporary or prolonged immersion is considered a design requirement.

Designed Operating Environment


The IP68 Sealed version is designed for operation in environments exposed to:

- Ambient temperatures up to 30°C.
- Heavy rainfall and wind-driven rain.
- Typhoon weather conditions.
- High humidity.
- Dust and airborne particles.
- Snow and ice.
- Temporary or prolonged flooding.
- Temporary or prolonged water immersion.

Installation Requirements

To ensure reliable operation and achieve the intended environmental protection, the following installation requirements shall be observed:

- The probe may be installed in locations where temporary or prolonged flooding is expected.
- Install the probe in a shaded location to minimize solar heat gain and maximize thermal performance.
- As the enclosure is fully sealed, no ventilation clearance is required.
- Install the probe in accordance with all applicable local electrical, structural, and safety regulations.

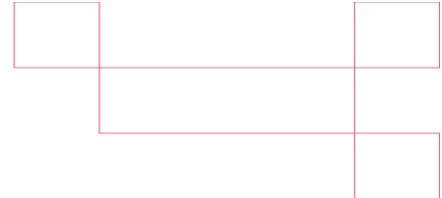

Flood Recovery

The information provided in this section is intended as technical guidance to assist with recovery following exceptional flooding events and to illustrate the serviceability of the INOS Watcher platform. It does not replace or limit the support, warranty, or maintenance services provided by Digis Squared.

All technical support, repair, replacement, and warranty obligations shall be provided in accordance with the applicable commercial agreement, maintenance contract, or warranty terms agreed between Digis Squared and the customer.

The IP68 Sealed version is specifically designed for environments where temporary or prolonged immersion may occur.

Following a flooding event:

- Inspect the enclosure for any signs of physical damage.
- Clean the enclosure to remove mud, debris, salt, or other contaminants.
- Verify the integrity of all external connectors and cable glands.
- Perform a functional verification before returning the probe to service.
- Under normal circumstances, no replacement of enclosure components should be required following immersion, provided the enclosure integrity has not been compromised.



Enabling Smarter
Networks