


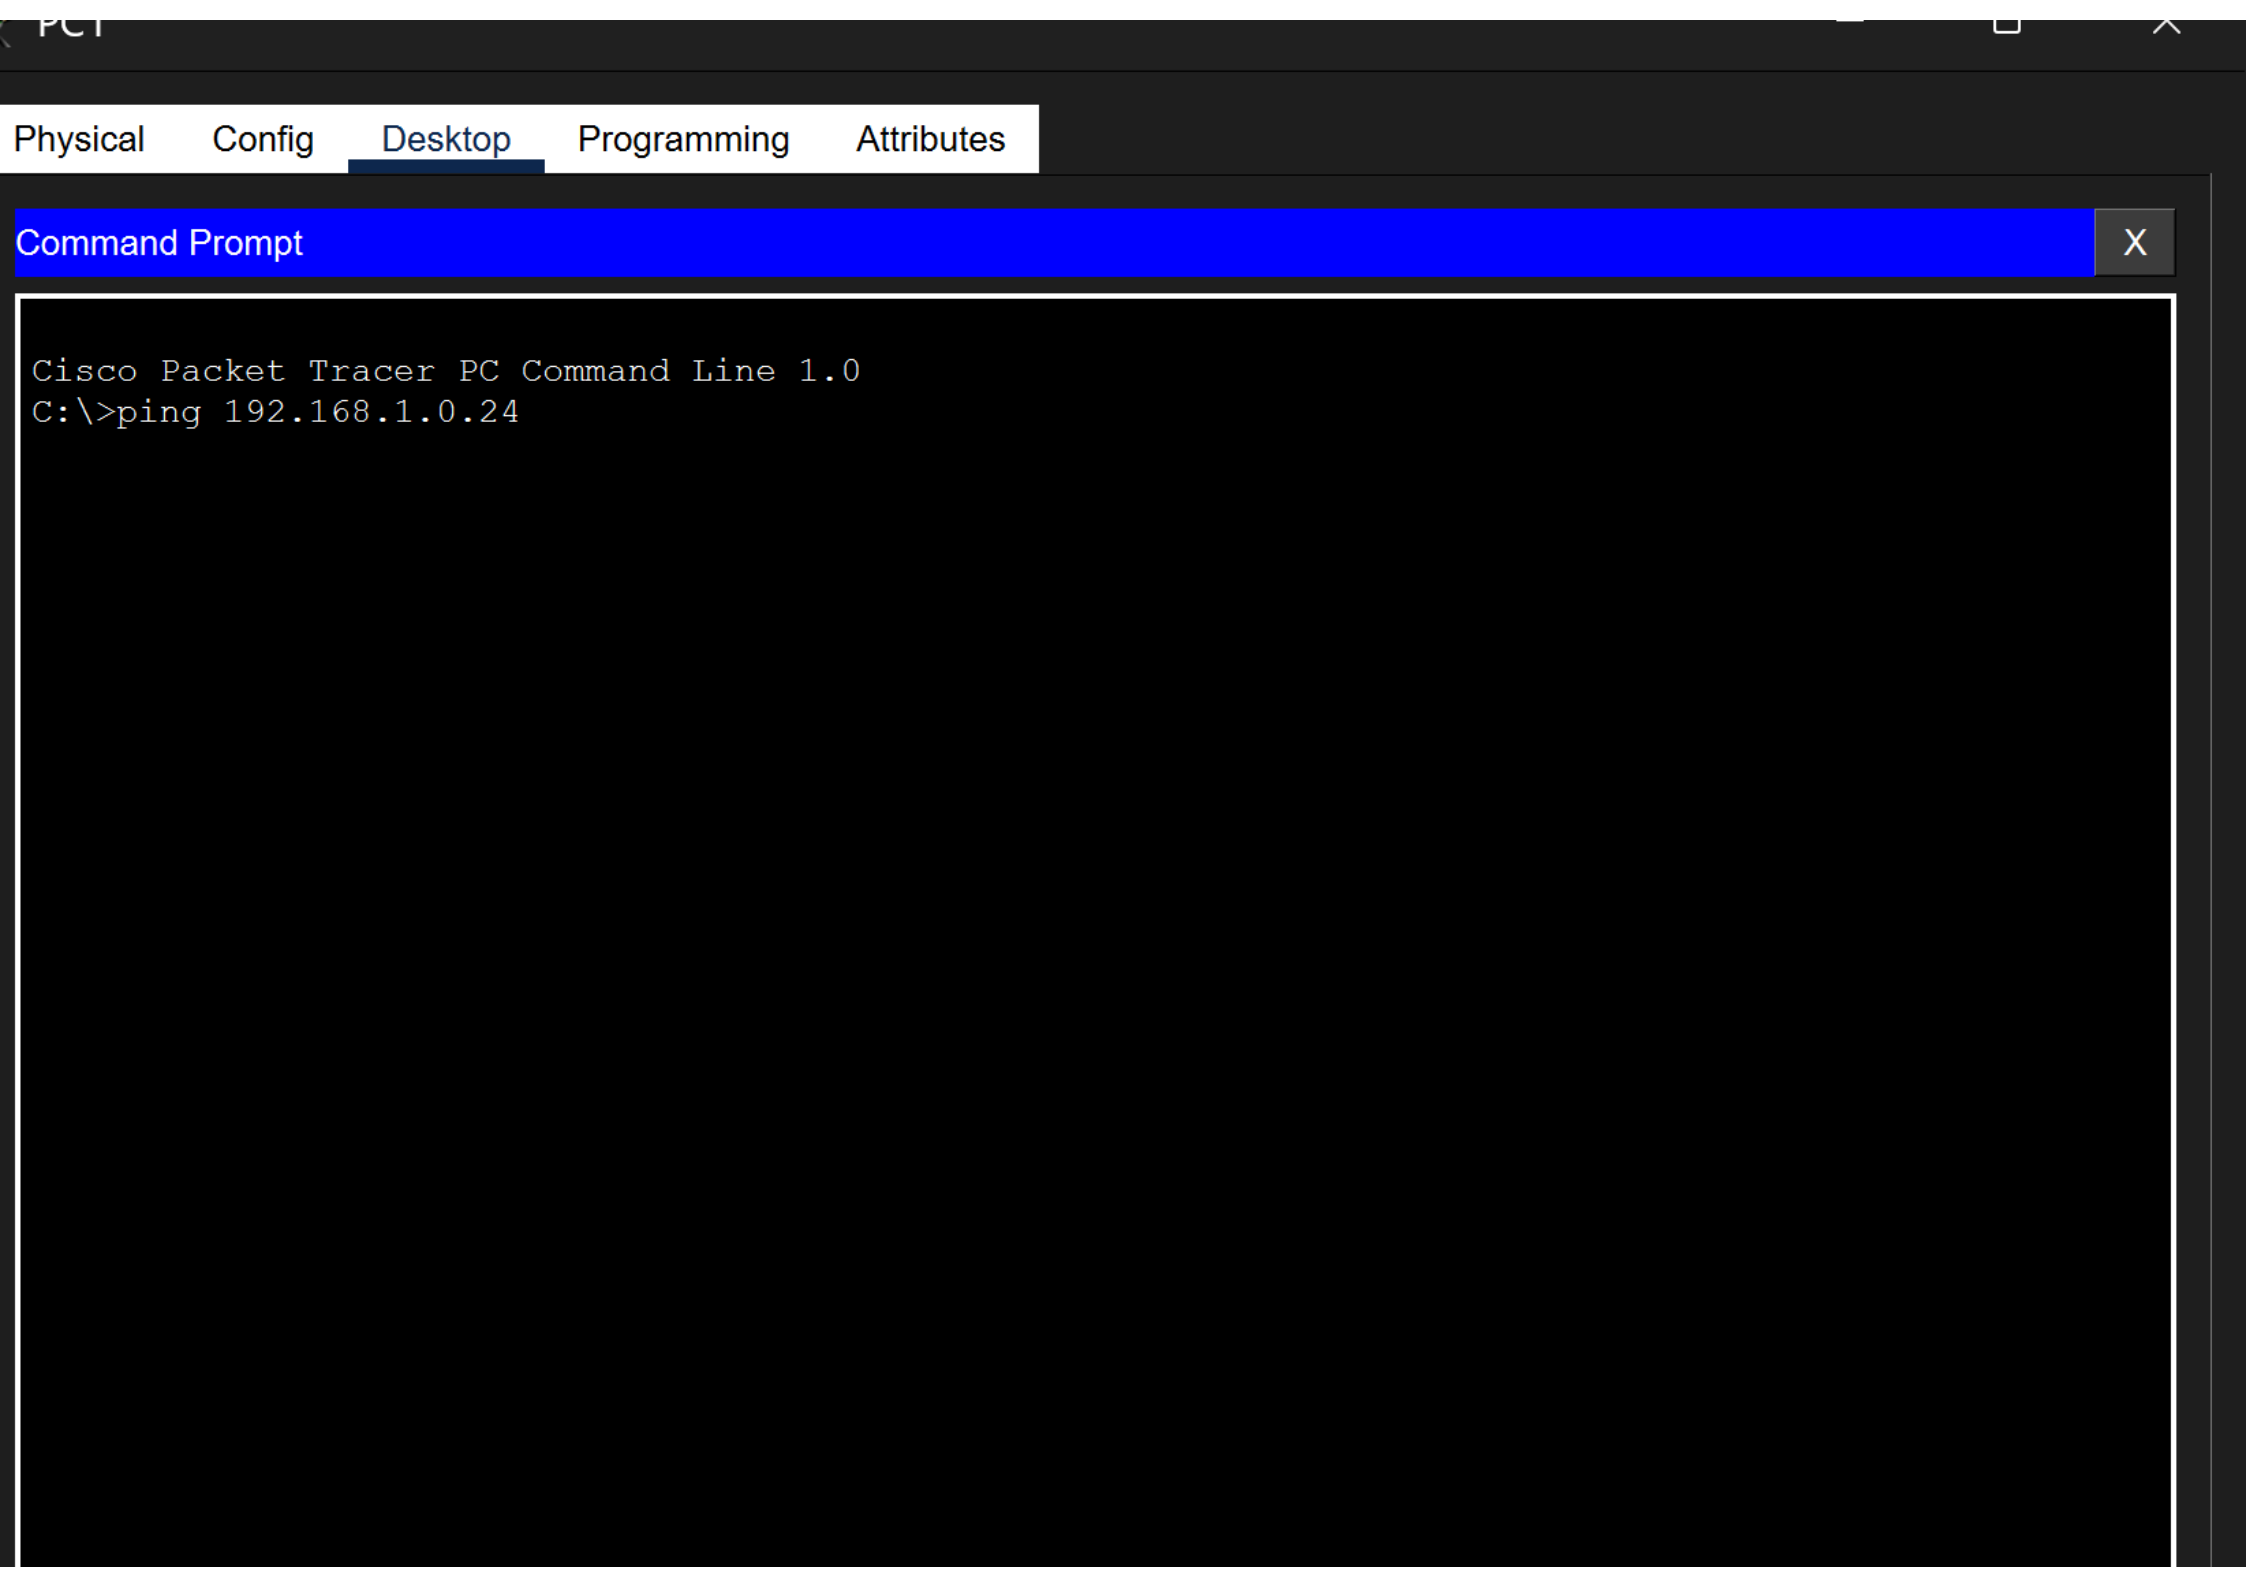

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.0.24
```

Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0

C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=2ms TTL=128

Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Reply from 192.168.1.3: bytes=32 time=2ms TTL=128

Ping statistics for 192.168.1.3:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 2ms, Average = 1ms

C:\>|

Vis.	Time(sec)	Last Device	At Device
---	84.175	--	PC1
---	84.176	PC1	SW1
---	84.177	SW1	SW2
---	84.178	SW2	PC3
---	84.179	PC3	SW2
---	84.180	SW2	SW1
---	84.181	SW1	PC1
---	162.301	--	PC1
---	162.302	PC1	SW1
---	162.303	SW1	SW2

```
C:\>ping 192.168.1.3
```

```
Pinging 192.168.1.3 with 32 bytes of data:
```

```
Ping statistics for 192.168.1.3:
```

```
    Packets: Sent = 1, Received = 0, Lost = 1 (100% loss),
```

```
Control-C
```

```
^C
```

```
C:\>ping 192.168.1.3
```

```
Pinging 192.168.1.3 with 32 bytes of data:
```

```
Reply from 192.168.1.3: bytes=32 time=6ms TTL=128
```

Simulation Panel

Event List

Vis.	Time(sec)	Last Device	At Device	Type
—	273.539	--	PC4	ICMP
—	273.539	--	PC4	ARP
—	273.540	PC4	SW2	ARP
—	273.541	SW2	PC3	ARP
—	273.541	SW2	SW1	ARP
—	273.542	SW1	PC1	ARP
—	273.542	SW1	PC2	ARP
—	273.543	PC1	SW1	ARP
—	273.544	SW1	SW2	ARP
—	273.545	SW2	PC4	ARP
—	273.545	--	PC4	ICMP

Reset Simulation



Constant Delay

Captured to: *
273.548 s

Play Controls



Event List Filter: Visible Events

```
SW1#show mac address-table
      Mac Address Table
```

Vlan	Mac Address	Type	Ports
----	-----	-----	-----

1	0001.647b.3119	DYNAMIC	Gig0/1
1	0004.9a6e.d870	DYNAMIC	Gig0/1
1	0060.5c56.14d3	DYNAMIC	Fa0/2
1	00d0.d3ad.9cab	DYNAMIC	Fa0/1

```
SW1#
```

```
SW2#show mac ad
```

```
SW2#show mac address-table
```

```
Mac Address Table
```

```
-----
```

Vlan	Mac Address	Type	Ports
----	-----	-----	-----
1	0001.647b.3119	DYNAMIC	Fa0/2
1	0004.9a6e.d870	DYNAMIC	Fa0/1
1	0060.5c56.14d3	DYNAMIC	Gig0/1
1	00d0.d3ad.9cab	DYNAMIC	Gig0/1

```
SW2#clear mac address-table ?
```

```
dynamic dynamic entry type
```

```
<cr>
```

```
SW2#clear mac address-table d
```

```
SW2#clear mac address-table dynamic
```

```
SW2#show mac address-table
```

```
Mac Address Table
```

```
-----
```

Vlan	Mac Address	Type	Ports
----	-----	-----	-----

```
SW2#
```