

# Design and Manufacture of an Open-Hardware University Rocket Airframe using Carbon Fiber

Joseph Shields, Brandon Bonner, Leslie Elwood, Erik Nelson, and Jacob East \*

The amateur and university rocketry communities are rapidly reaching higher altitudes with more sophisticated rockets. However, most groups are still using heavy airframes made of metal or fiberglass. Commercial off-the-shelf airframes are either too expensive for low-budget university groups or too small to use as a platform for high altitude experiments. A capstone team of mechanical engineering seniors at Portland State University is developing a low-weight, modular carbon fiber airframe as an open-hardware technology for university rocketry. This team is continuing the work of a 2014 capstone team, who developed a carbon fiber layup process with promising results. This will enable low-budget groups like the Portland State Aerospace Society to explore high altitude science and compete in the university space race.

## I. Introduction

The Portland State Aerospace Society (PSAS) is an interdisciplinary group of engineering students and alumni of Portland State University (PSU) with the long term goal of putting a cubesat into orbit with their own rocket. Their current airframe, named Launch Vehicle 2 (LV2), has served for over 12 years, representing 10 of the group's 13 launches, and hosted experiments ranging from custom patch antennas and long range WiFi technology to GPS navigation and a cold gas reaction control system (figure 1). The LV2 platform is mostly constructed of aluminum with a fiberglass shell, with many of the parts having been fabricated in home garages. This makes for a robust but heavy design. Additionally, this airframe is built with a 4.5 inch inner diameter which PSAS's experiments have outgrown.

The new airframe being designed, named Launch Vehicle 3 (LV3), aims to address these issues. The LV3 platform uses a 6 inch inner diameter, modules composed of carbon fiber and thin aluminum coupling rings, a carbon fiber nose cone, and a carbon fiber fin section. All of the airframe components connect via standardized rings, to accommodate future experimental modules and flight configurations.

The cylindrical LV3 airframe modules already outperform the old design with an 80% reduction in weight and ??% increase in yield strength.

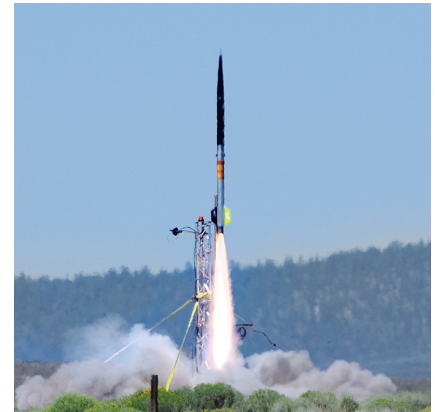



Figure 1. PSAS's LV2 rocket lifting off for the group's 13<sup>th</sup> launch. The custom cylindrical patch antenna can be seen as a brown band around the middle of the rocket.

## II. Significance

This is a completely open hardware project, aiming to elevate the amateur and university rocketry communities. The knowledge generated by designing and building the LV3 airframe will be free to anyone wishing to copy or modify them. Since the aerospace industry is dominated by proprietary work, the open nature of this project carries an element of novelty in itself. The open hardware aerospace community comprises a relatively small pool of knowledge, which the LV3 project will add to.

---

\*Portland State University, Portland, OR 97201

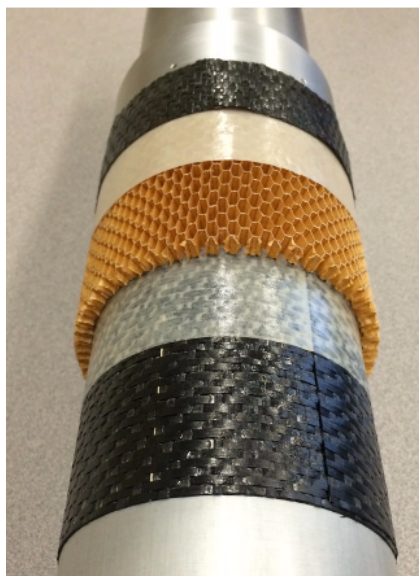

**Figure 2.** A cut away view of the layered LV3 design. From bottom to top: preimpregnated carbon fiber (black), adhesive film (eggshell), honeycomb core (brown), adhesive film (eggshell), preimpregnated carbon fiber (black).

Few rocket designs take advantage of the capabilities of composite materials. Existing designs fall into two categories. The first uses a single thick layer of the composite for both load bearing and as the skin of the rocket. The second features a thin composite layer for the rocket's skin, and relies on a metal frame for structural support. Neither of these designs realize the full potential of composites. The LV3 design relies on a three layer method: two layers of carbon fiber fabric sandwiching a honeycomb core (figure 2). This design maintains the high specific strength of single sheets of carbon fiber, while also increasing overall rigidity by preventing buckling and bending. The result is an airframe whose structure and skin comes from just two sheets of carbon fiber. The only metal necessary in this design is the aluminum used in the miscellaneous parts like the tip of the nose and the coupling rings which connect the carbon fiber modules.

### III. Plan of Work

The design of the cylindrical modules has already been completed, with promising results. These new modules achieved an 80% weight reduction over the previous LV2 modules, and exceeded the design strength. The present method of manufacturing the new LV3 modules is effective, but needs refinement. There are many steps that rely on the skill of the people assembling the modules. These steps need to be modified so that future PSAS groups and outside university teams will be able to replicate the LV3 design.

Future replication of the LV3 modules and design process is central to the project. Being composed mostly of undergraduates, PSAS has a high turnover rate for its members. Without clear and precise documentation, some past knowledge has been lost when whole teams graduate together. To preserve the lessons learned while designing and building LV3 and to facilitate a base of institutional knowledge within PSAS, the LV3 team is writing a how-to guide for designing and building light-weight rocket airframes using carbon fiber.

Due to the material needs of the LV3 design, the team has secured donations of both material and machining time from companies such as Pacific Coast Composites and Machine Sciences Corporation. Commercial aerospace firms demand very high quality materials. Composite fabrics that have been preimpregnated with epoxy have a short shelf life, even when stored in cold, dry conditions. As such, the companies that use these materials and their suppliers frequently have preimpregnated fabrics which, for the high standards of commercial aerospace manufacturing, are expired. For use in amateur and university rocketry, however, they are still quite usable. Many university groups, including PSAS, would be unable to purchase these materials outright, so developing a protocol for acquiring unused composites from aerospace firms is central to the LV3 project.

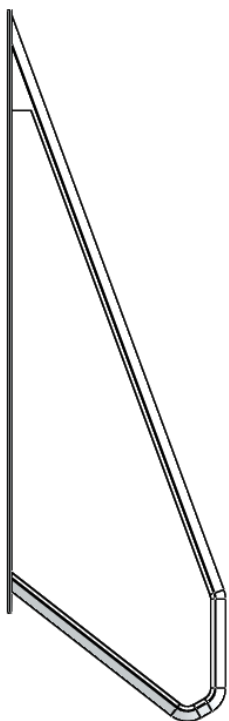


Figure 3. The proposed design for the aluminum frame that will form the edge of a fin on the LV3 rocket.