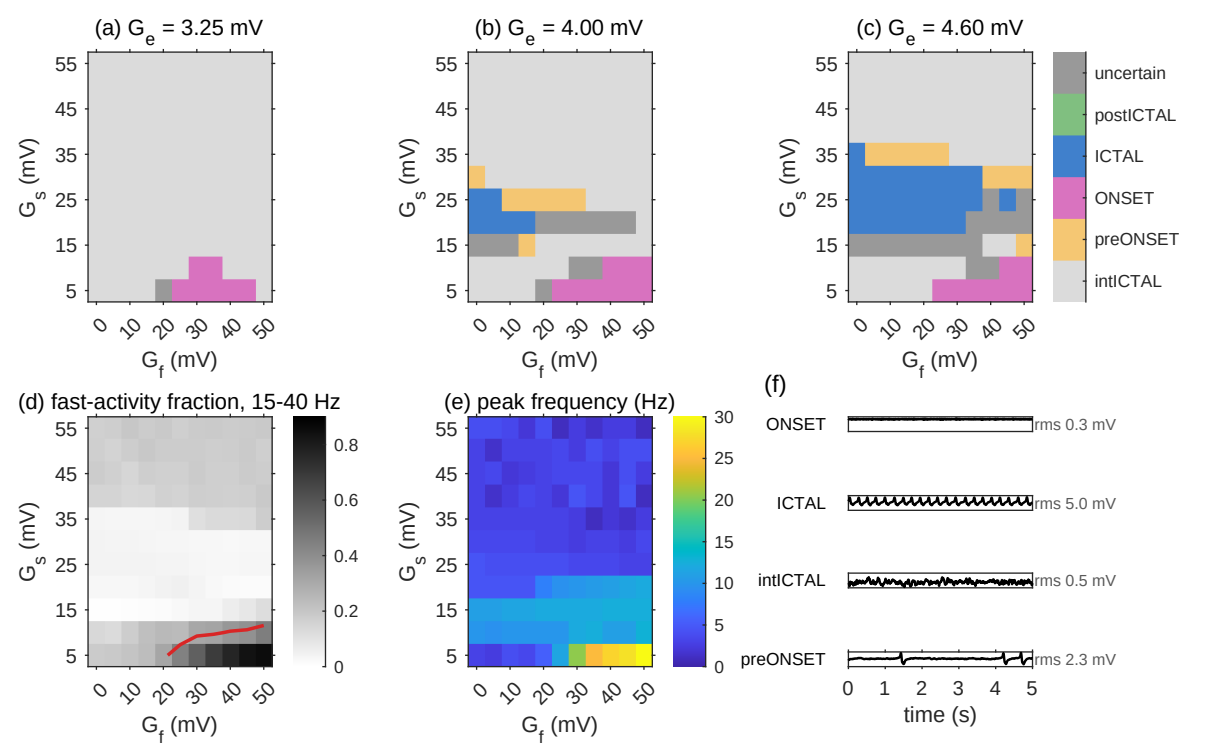

(a) G_e = 3.25 mV
(b) G_e = 4.00 mV
(c) G_e = 4.60 mV
G_s (mV)
G_f (mV)
uncertain
postICTAL
ICTAL
ONSET
preONSET
intICTAL
(d) fast-activity fraction, 15-40 Hz
(e) peak frequency (Hz)
(f)
ONSET
ICTAL
intICTAL
preONSET
rms 0.3 mV
rms 5.0 mV
rms 0.5 mV
rms 2.3 mV
time (s)