




Job No.: RE BET S01S00 2024
Standard: EN55032 Class B (QP) 3m
Test item: Radiation Test
Temp.(°C)/Hum.(%): 26 / 54 %
Company:
Trade Name:
Model: BET S01S00

Polarization: Vertical
Device(#)
Date: 2024/9/3
Time: 9:53:31
Engineer Signature:
Distance:

Test Mode/Description: 开灯+摄像头

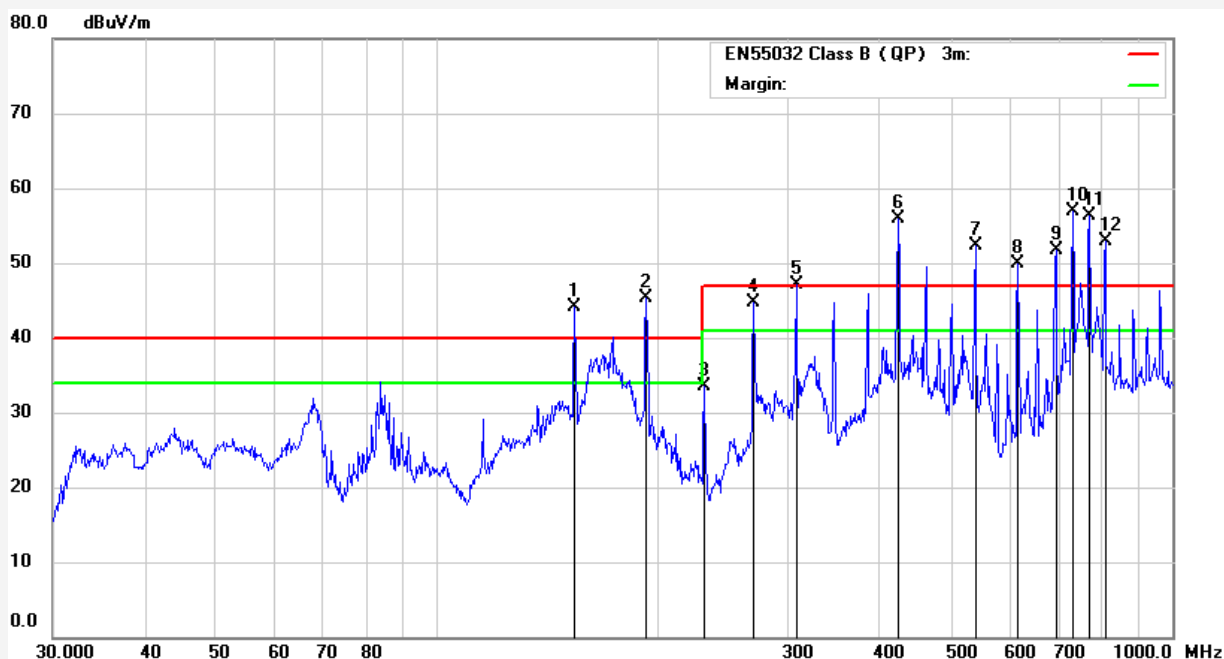


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	153.7385	62.89	-18.70	44.19	40.00	4.19	peak	F	
2	192.4185	67.16	-21.86	45.30	40.00	5.30	peak	F	
3	230.9067	54.79	-21.38	33.41	47.00	-13.59	peak	P	
4	269.4282	63.84	-19.14	44.70	47.00	-2.30	peak	P	
5	307.8312	64.06	-17.03	47.03	47.00	0.03	peak	F	
6	423.5402	69.48	-13.56	55.92	47.00	8.92	peak	F	
7	539.4775	64.68	-12.45	52.23	47.00	5.23	peak	F	
8	616.3716	61.73	-11.82	49.91	47.00	2.91	peak	F	
9	694.4174	62.56	-10.76	51.80	47.00	4.80	peak	F	
10	731.9202	66.31	-9.33	56.98	47.00	9.98	peak	F	
11	771.4485	63.81	-7.54	56.27	47.00	9.27	peak	F	
12	810.2653	59.95	-6.96	52.99	47.00	5.99	peak	F	



Job No.: RE BET S01S00 2024
Standard: EN55032 Class B (QP) 3m
Test item: Radiation Test
Temp.(°C)/Hum.(%): 26 / 54 %
Company:
Trade Name:
Model: BET S01S00

Polarization: Horizontal
Device(#)
Date: 2024/9/3
Time: 9:55:17
Engineer Signature:
Distance:

Test Mode/Description: 开灯+摄像头

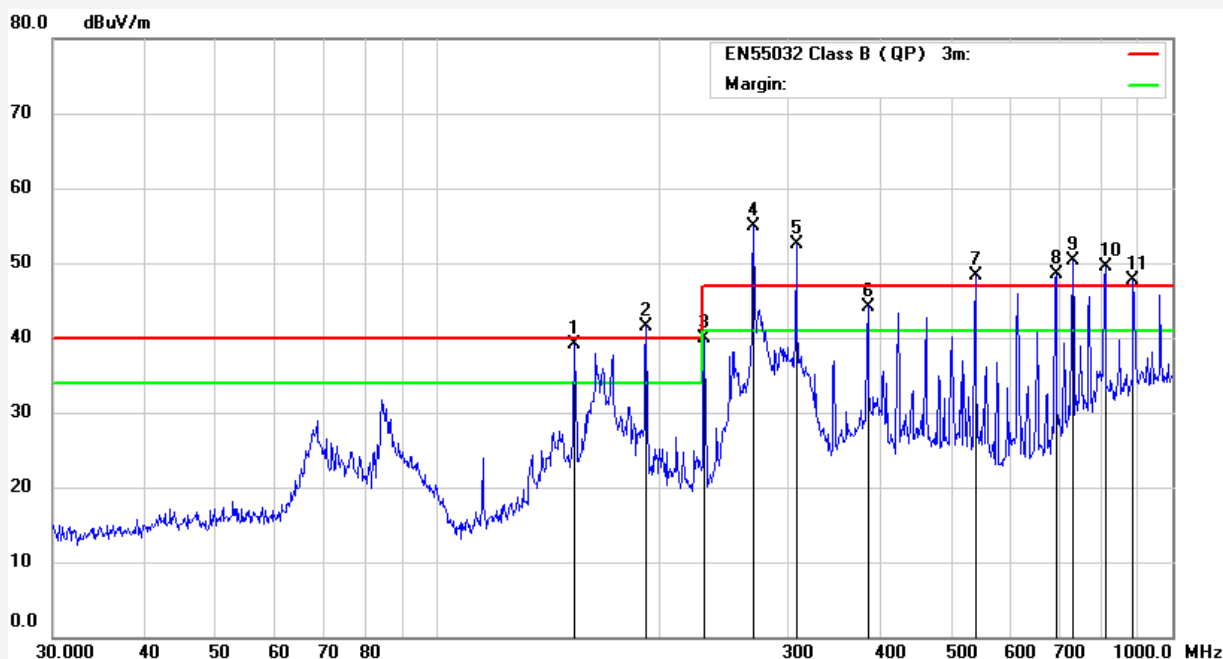

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	153.7385	58.84	-19.70	39.14	40.00	-0.86	peak	P	
2	192.4186	62.86	-21.37	41.49	40.00	1.49	peak	F	
3	230.9068	60.44	-20.47	39.97	47.00	-7.03	peak	P	
4	269.4284	74.16	-19.32	54.84	47.00	7.84	peak	F	
5	307.8313	69.65	-17.06	52.59	47.00	5.59	peak	F	
6	385.2805	58.95	-14.75	44.20	47.00	-2.80	peak	P	
7	539.4775	61.03	-12.63	48.40	47.00	1.40	peak	F	
8	694.4174	59.22	-10.76	48.46	47.00	1.46	peak	F	
9	731.9203	58.76	-8.42	50.34	47.00	3.34	peak	F	
10	810.2654	55.77	-6.25	49.52	47.00	2.52	peak	F	
11	884.5029	51.08	-3.45	47.63	47.00	0.63	peak	F	