


02B USB: 200 Hz demand across 700 modules

N = 1-700 | fixed round frequency = 200 Hz | theoretical demand, not achieved throughput

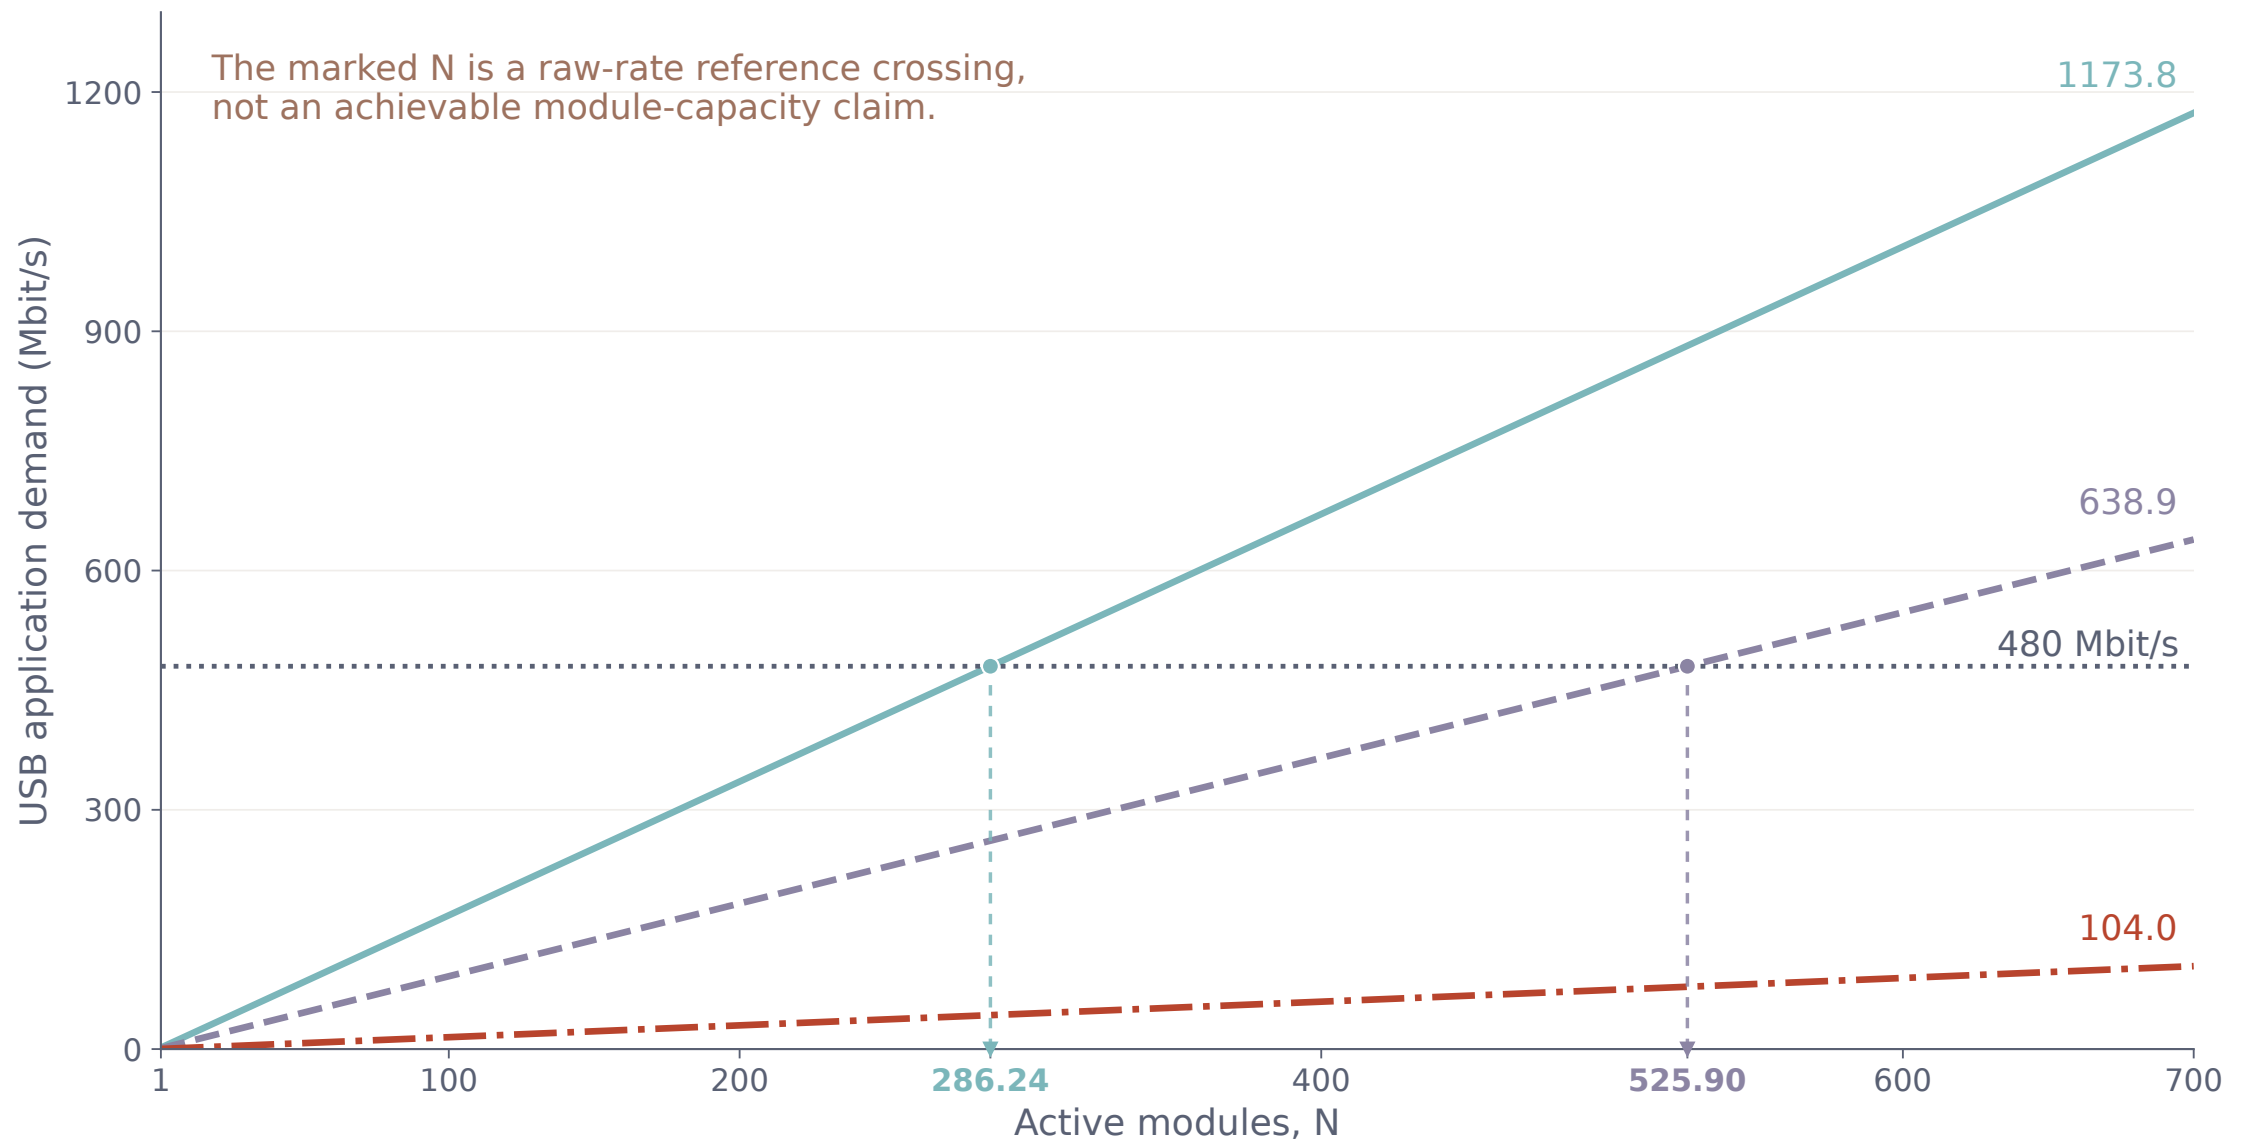

— FULL / mean DELTA K_D=480

- - - Mean DELTA K_D=240

- . - . - Mean DELTA K_D=0

..... USB 2.0 HS: 480 Mbit/s raw signaling

Nominal periodic ESKF only: $T=1$ s; $q=\min(1,1/FT)$; $q_{\text{other}}=0$. Continuous-cycle approximation.

$H(M) = 24 + 4M$ B; $N \leq M$. Current $M = 4$; $N > 4$ uses $M = \max(4, N)$ as extrapolation.