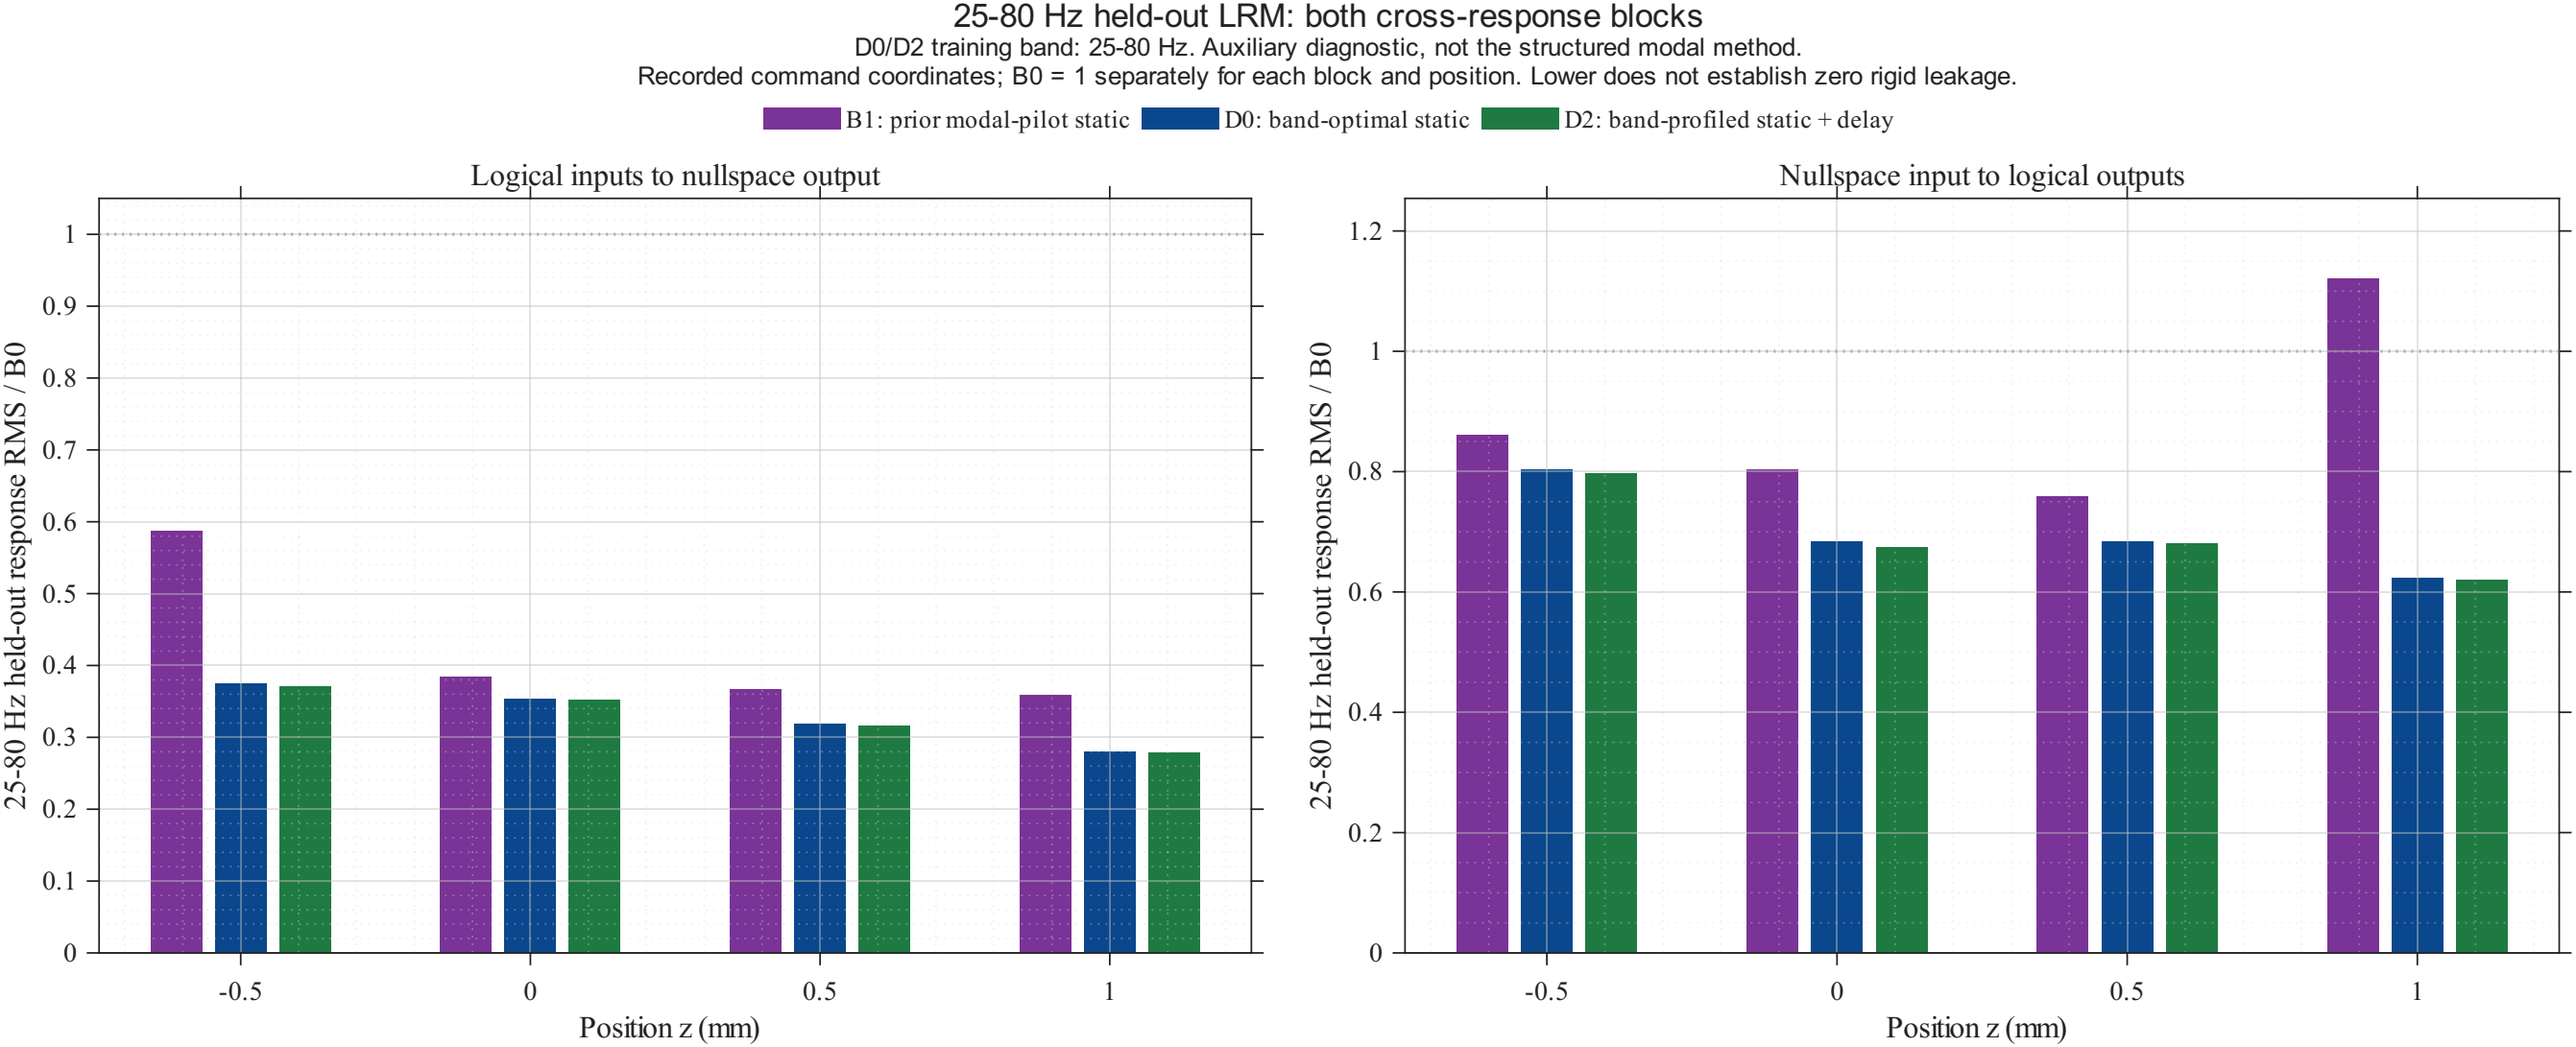

25-80 Hz held-out LRM: both cross-response blocks
D0/D2 training band: 25-80 Hz. Auxiliary diagnostic, not the structured modal method.
Recorded command coordinates; B0 = 1 separately for each block and position. Lower does not establish zero rigid leakage.
B1: prior modal-pilot static
D0: band-optimal static
D2: band-profiled static + delay
Logical inputs to nullspace output
25-80 Hz held-out response RMS / B0
Position z (mm)
Nullspace input to logical outputs
25-80 Hz held-out response RMS / B0
Position z (mm)