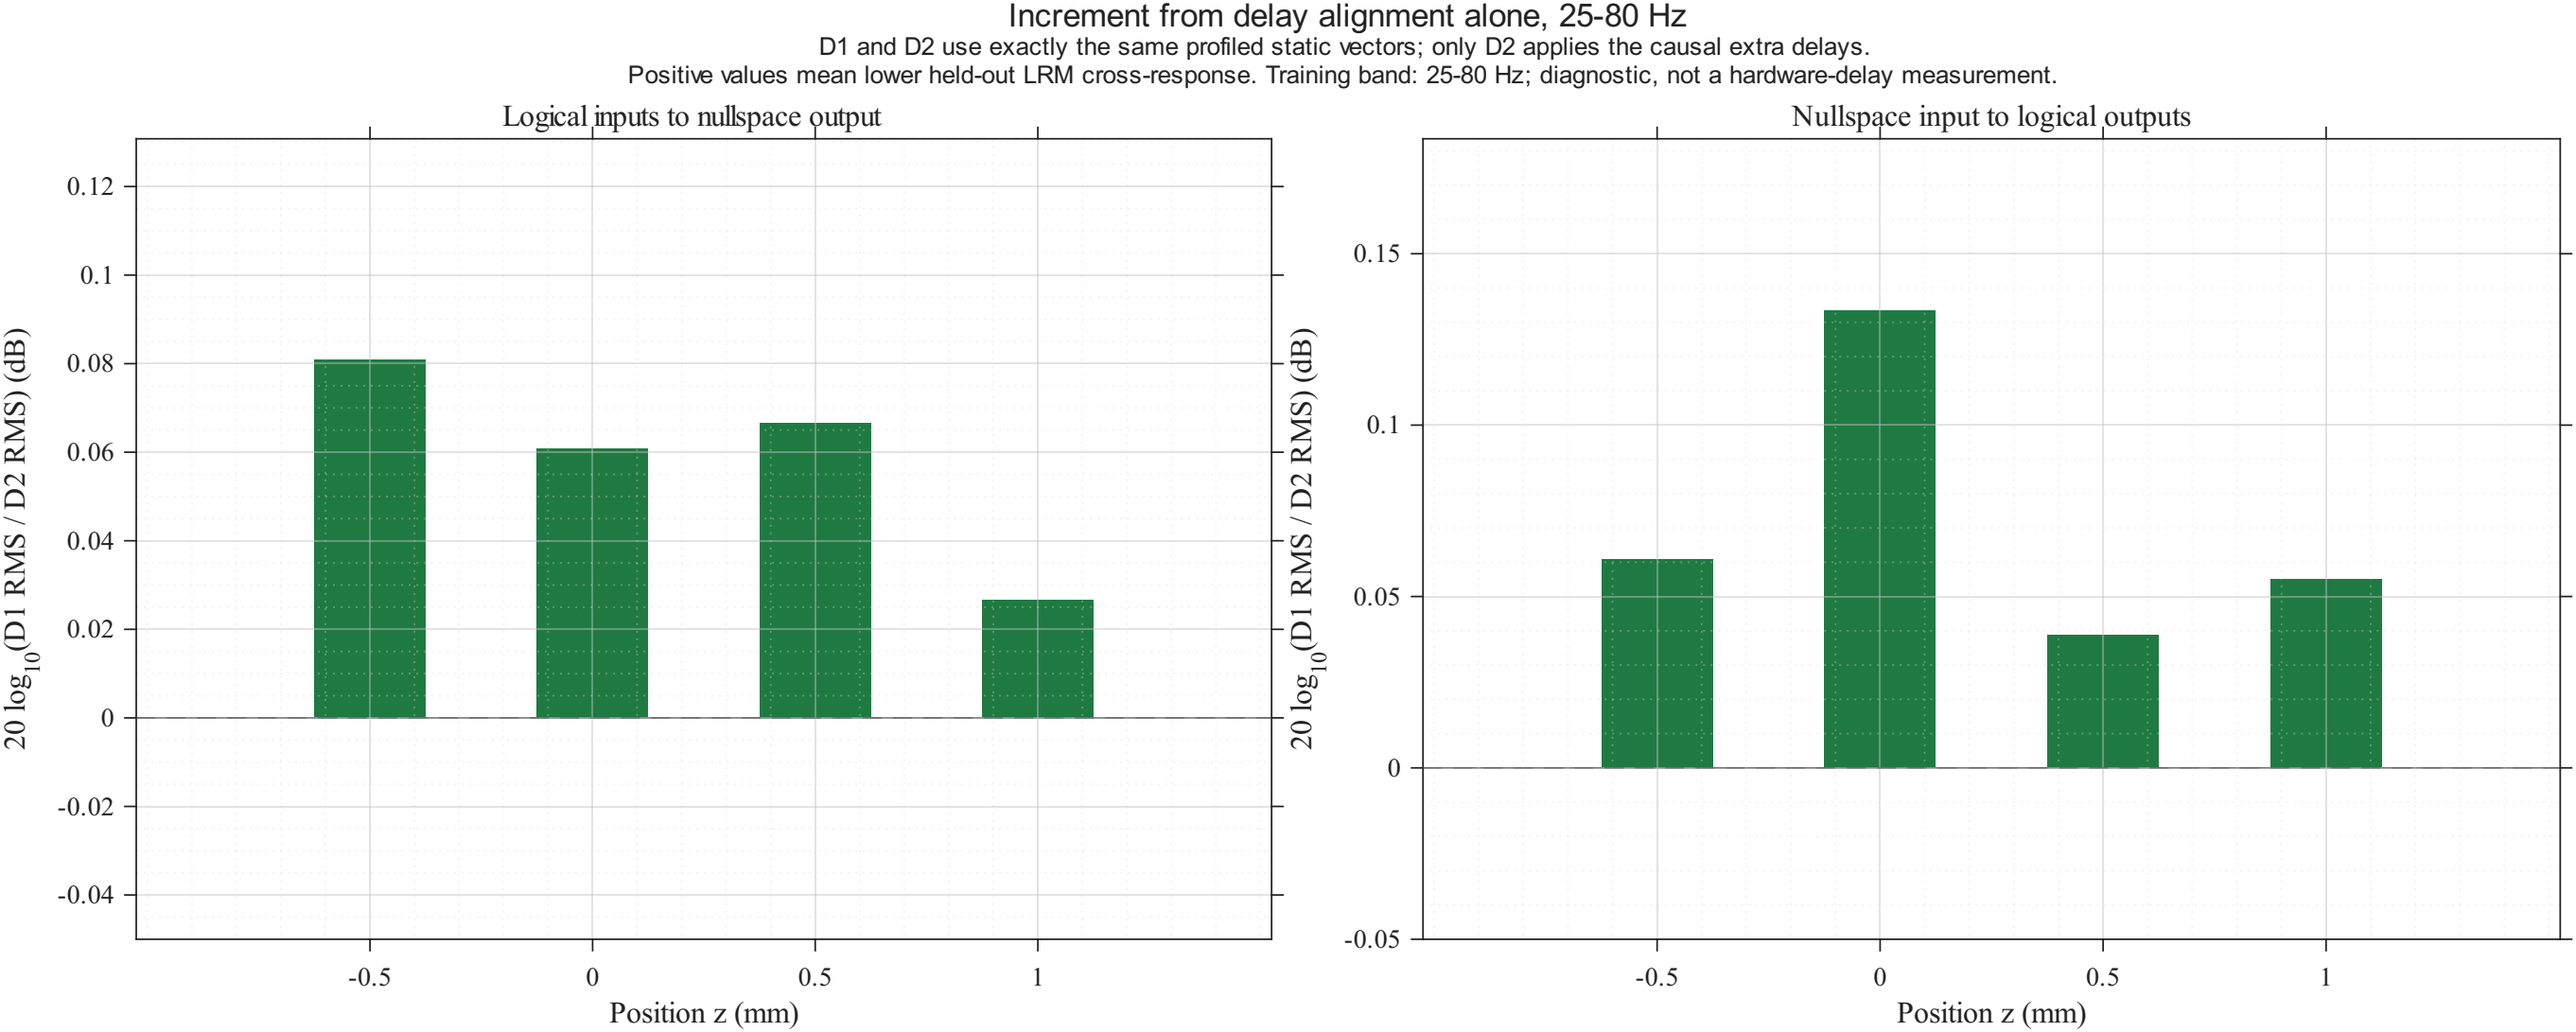

Increment from delay alignment alone, 25-80 Hz
D1 and D2 use exactly the same profiled static vectors; only D2 applies the causal extra delays.
Positive values mean lower held-out LRM cross-response. Training band: 25-80 Hz; diagnostic, not a hardware-delay measurement.
Logical inputs to nullspace output
Nullspace input to logical outputs
20 log10(D1 RMS / D2 RMS) (dB)
Position z (mm)
0.12
0.1
0.08
0.06
0.04
0.02
0
-0.02
-0.04
0.15
0.1
0.05
0
-0.05
-0.5
0
0.5
1