
Dynamic correction: in-band gain does not imply full-band decoupling


Second-half LRM, previously inspected; all fits use first-half data. Lower is better. No uncertainty bars are available.

Previous band-static | Dynamic, no cross-band guards | Dynamic, with cross-band guards


Logical input to nullspace output | 3-25 Hz

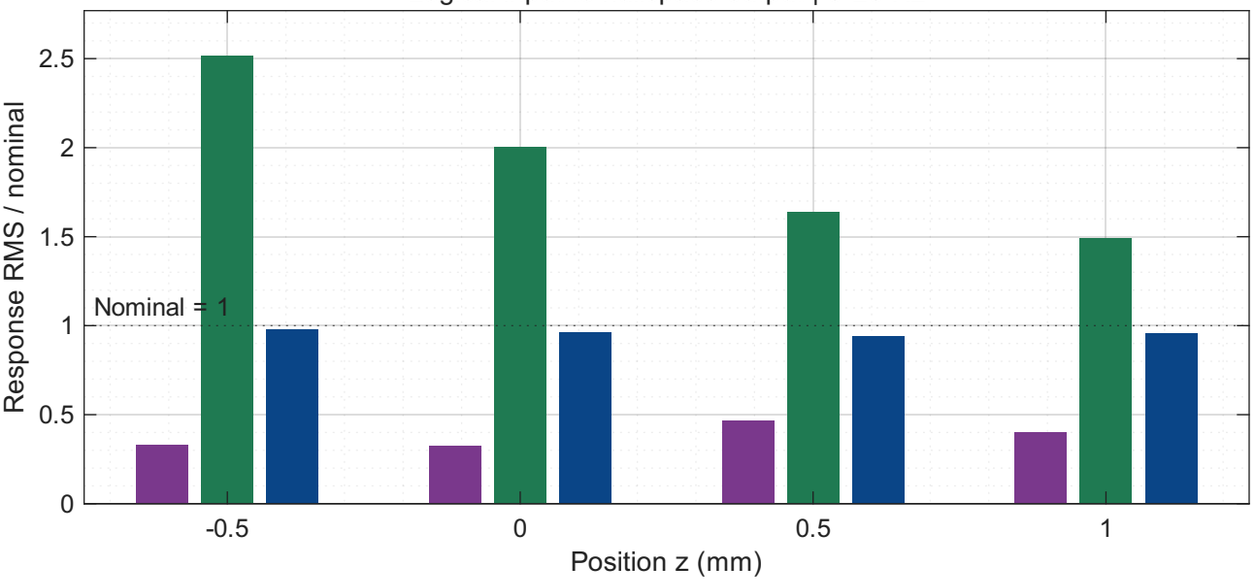


Nullspace input to logical outputs | 3-25 Hz

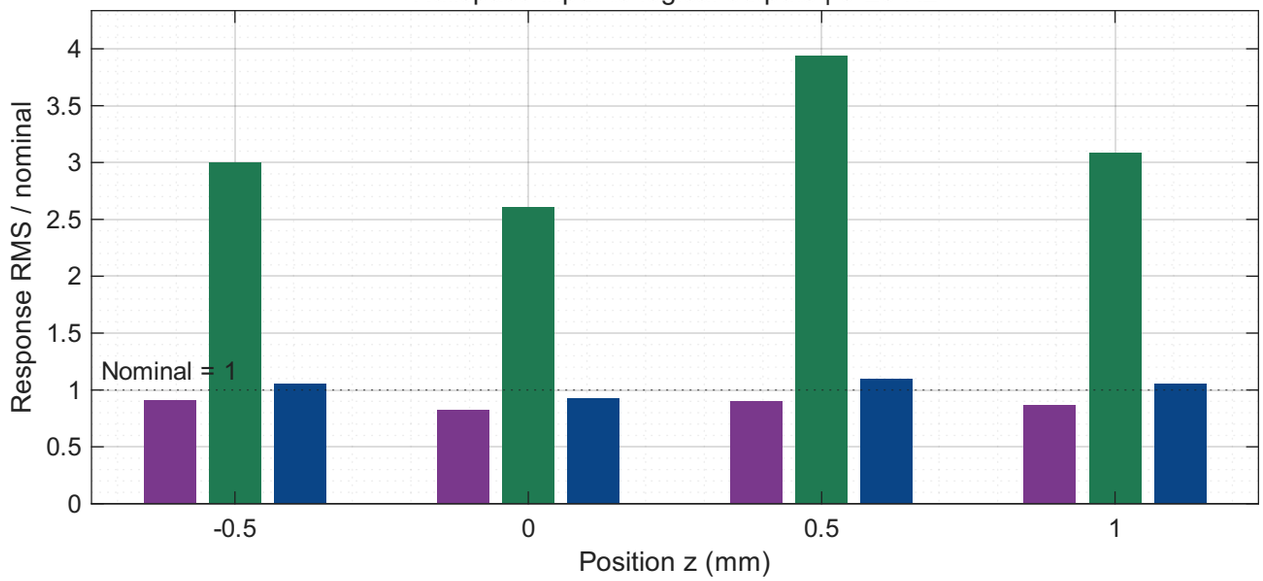


Logical input to nullspace output | 25-80 Hz

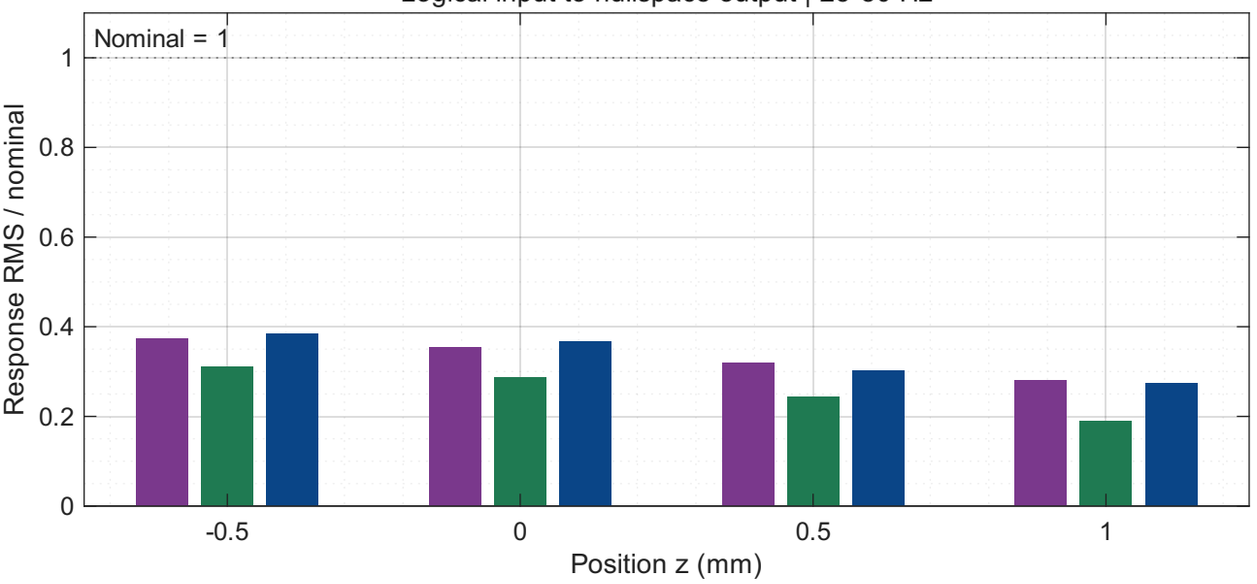

Nullspace input to logical outputs | 25-80 Hz

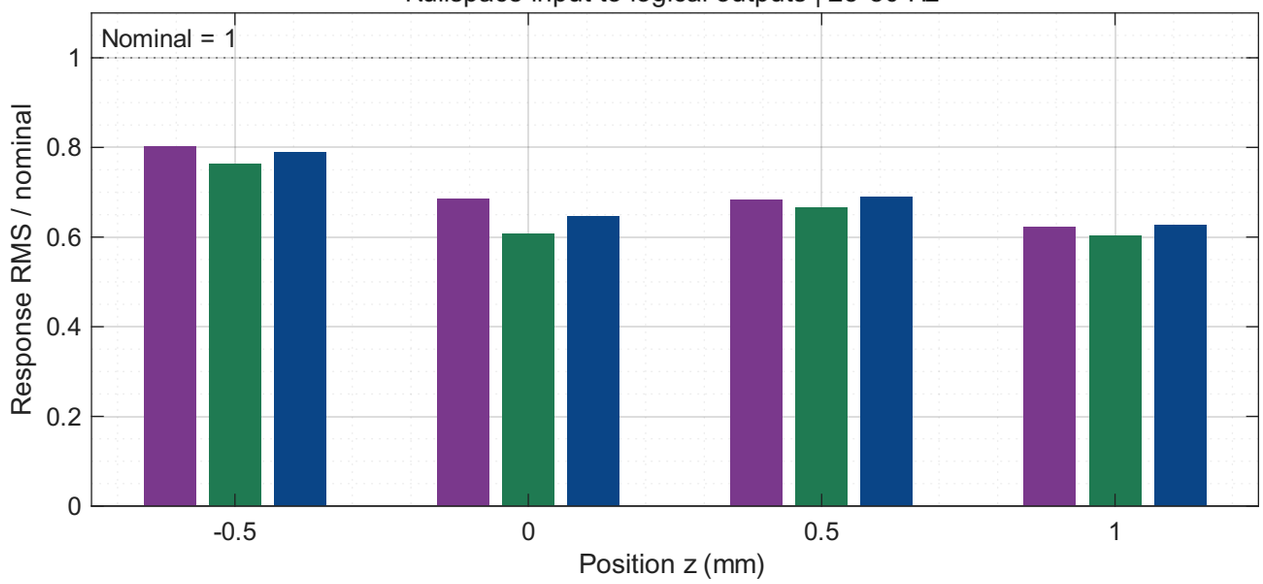

Logical input to nullspace output | 100-170 Hz

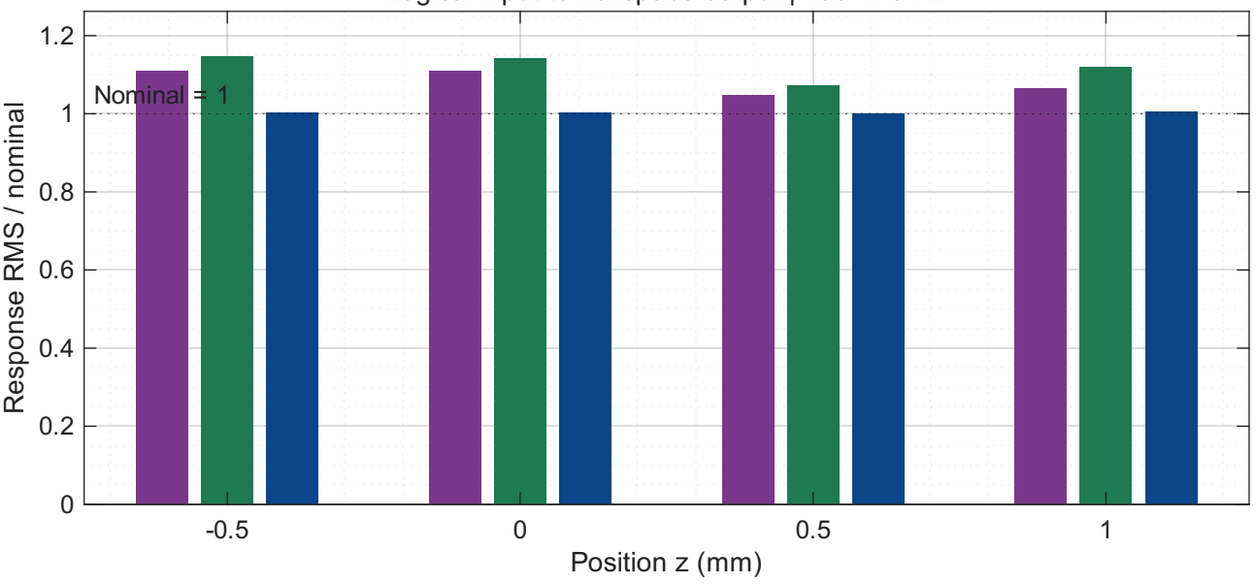

Nullspace input to logical outputs | 100-170 Hz

