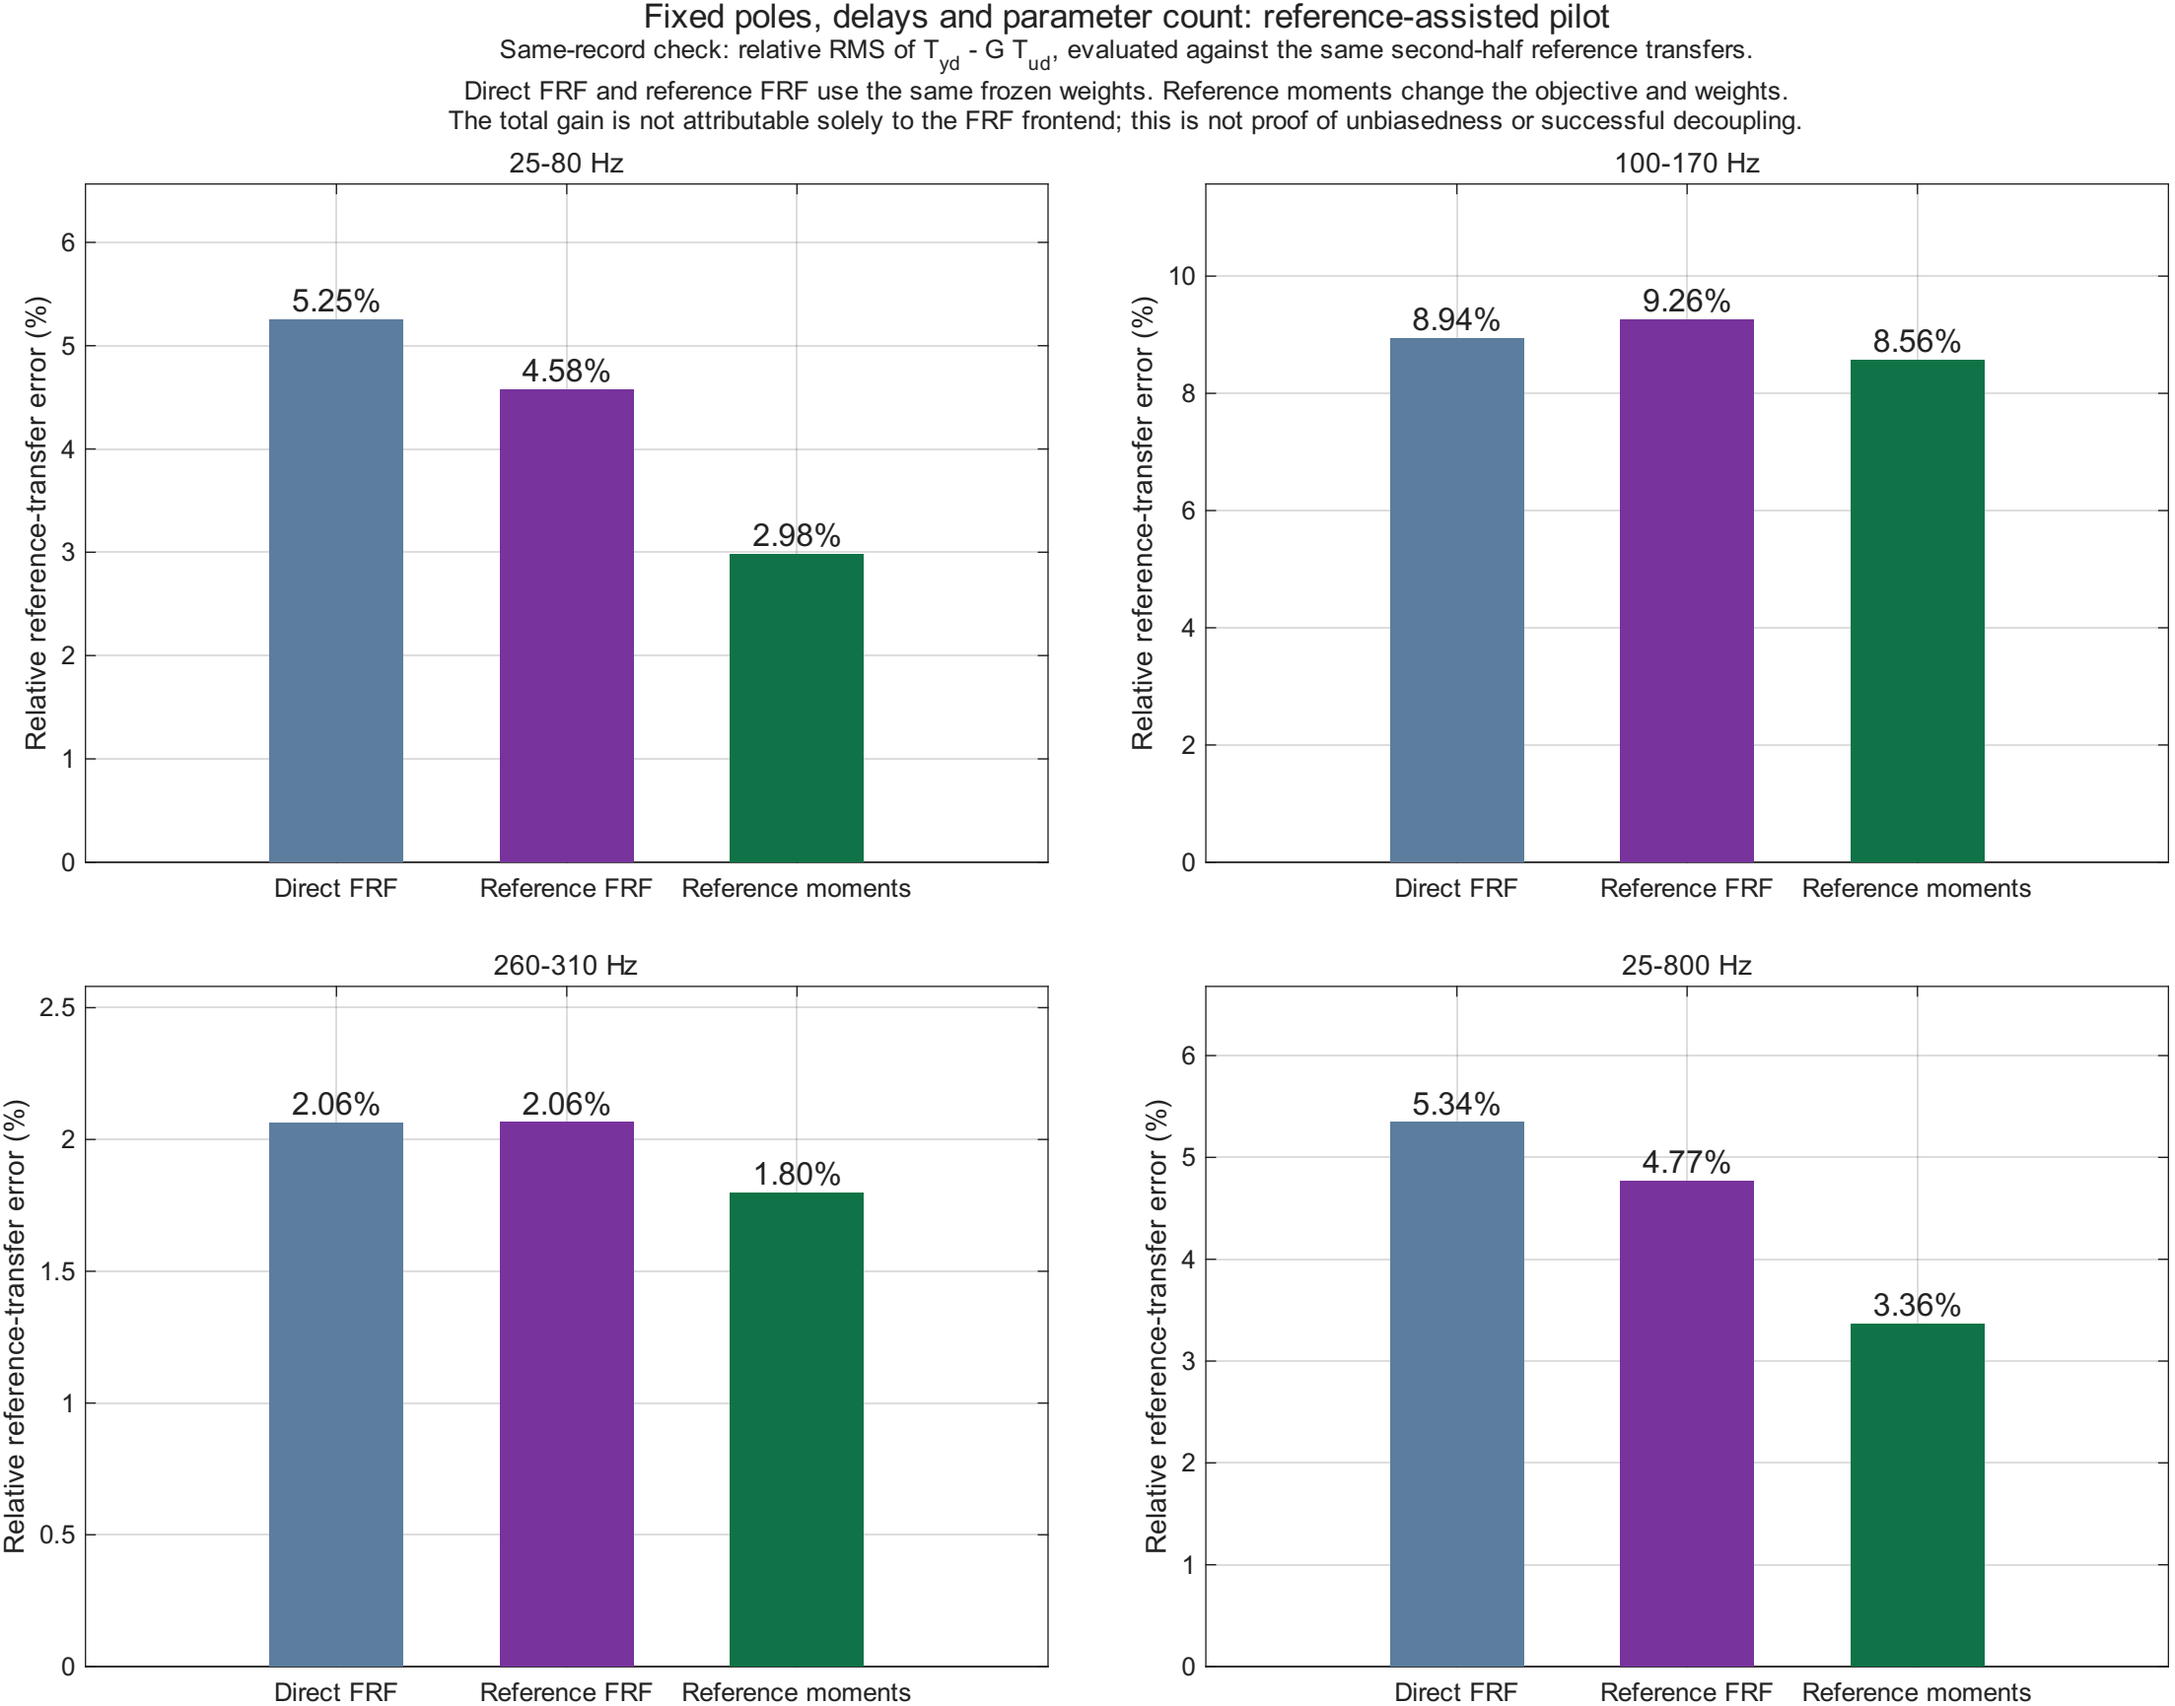
Fixed poles, delays and parameter count: reference-assisted pilot
Same-record check: relative RMS of T_{yd} - G T_{ud}, evaluated against the same second-half reference transfers.
Direct FRF and reference FRF use the same frozen weights. Reference moments change the objective and weights.
The total gain is not attributable solely to the FRF frontend; this is not proof of unbiasedness or successful decoupling.
25-80 Hz
Relative reference-transfer error (%)
5.25%
4.58%
2.98%
Direct FRF
Reference FRF
Reference moments
100-170 Hz
Relative reference-transfer error (%)
8.94%
9.26%
8.56%
Direct FRF
Reference FRF
Reference moments
260-310 Hz
Relative reference-transfer error (%)
2.06%
2.06%
1.80%
Direct FRF
Reference FRF
Reference moments
25-800 Hz
Relative reference-transfer error (%)
5.34%
4.77%
3.36%
Direct FRF
Reference FRF
Reference moments