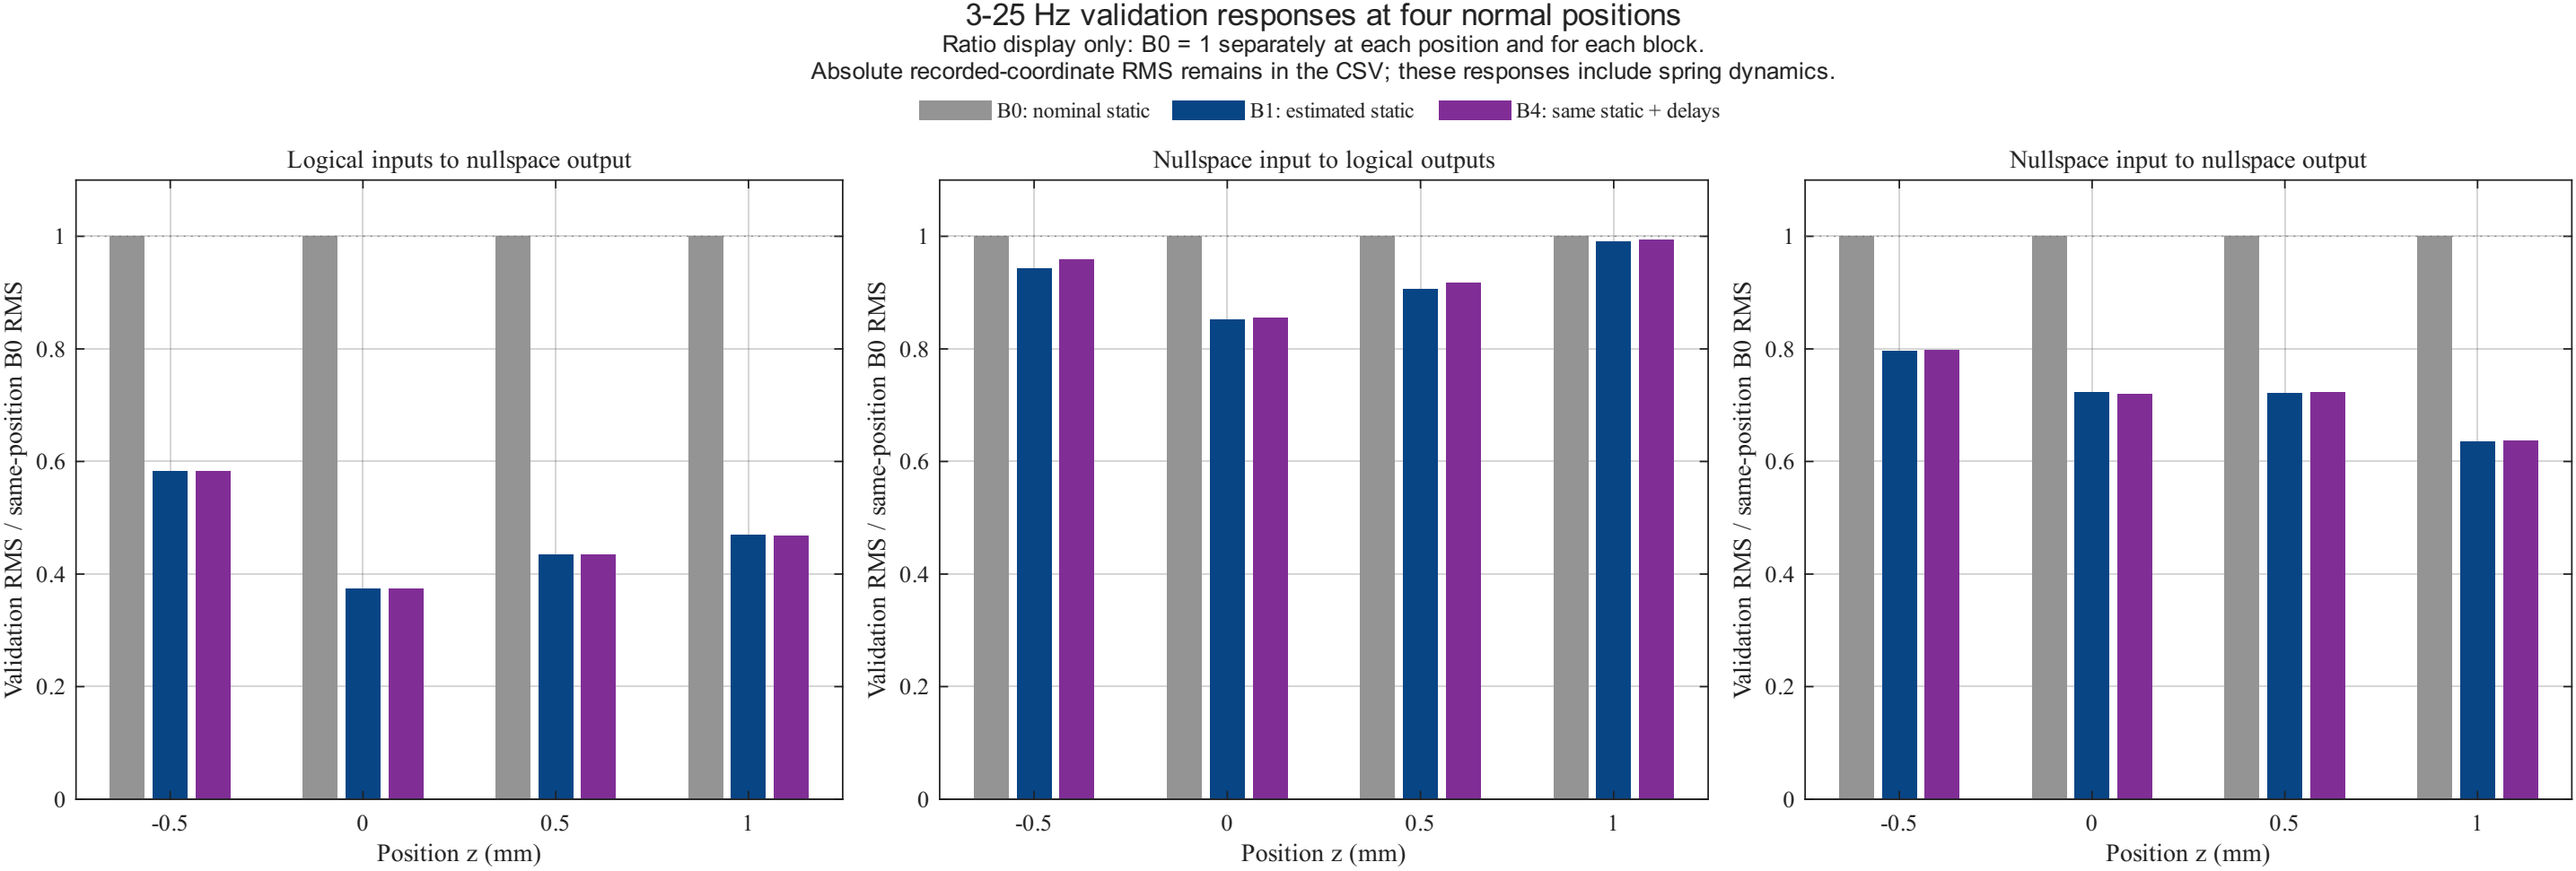
3-25 Hz validation responses at four normal positions
Ratio display only: B0 = 1 separately at each position and for each block.
Absolute recorded-coordinate RMS remains in the CSV; these responses include spring dynamics.
B0: nominal static
B1: estimated static
B4: same static + delays
Logical inputs to nullspace output
Nullspace input to logical outputs
Nullspace input to nullspace output
Validation RMS / same-position B0 RMS
Position z (mm)
0
0.2
0.4
0.6
0.8
1
-0.5
0
0.5
1