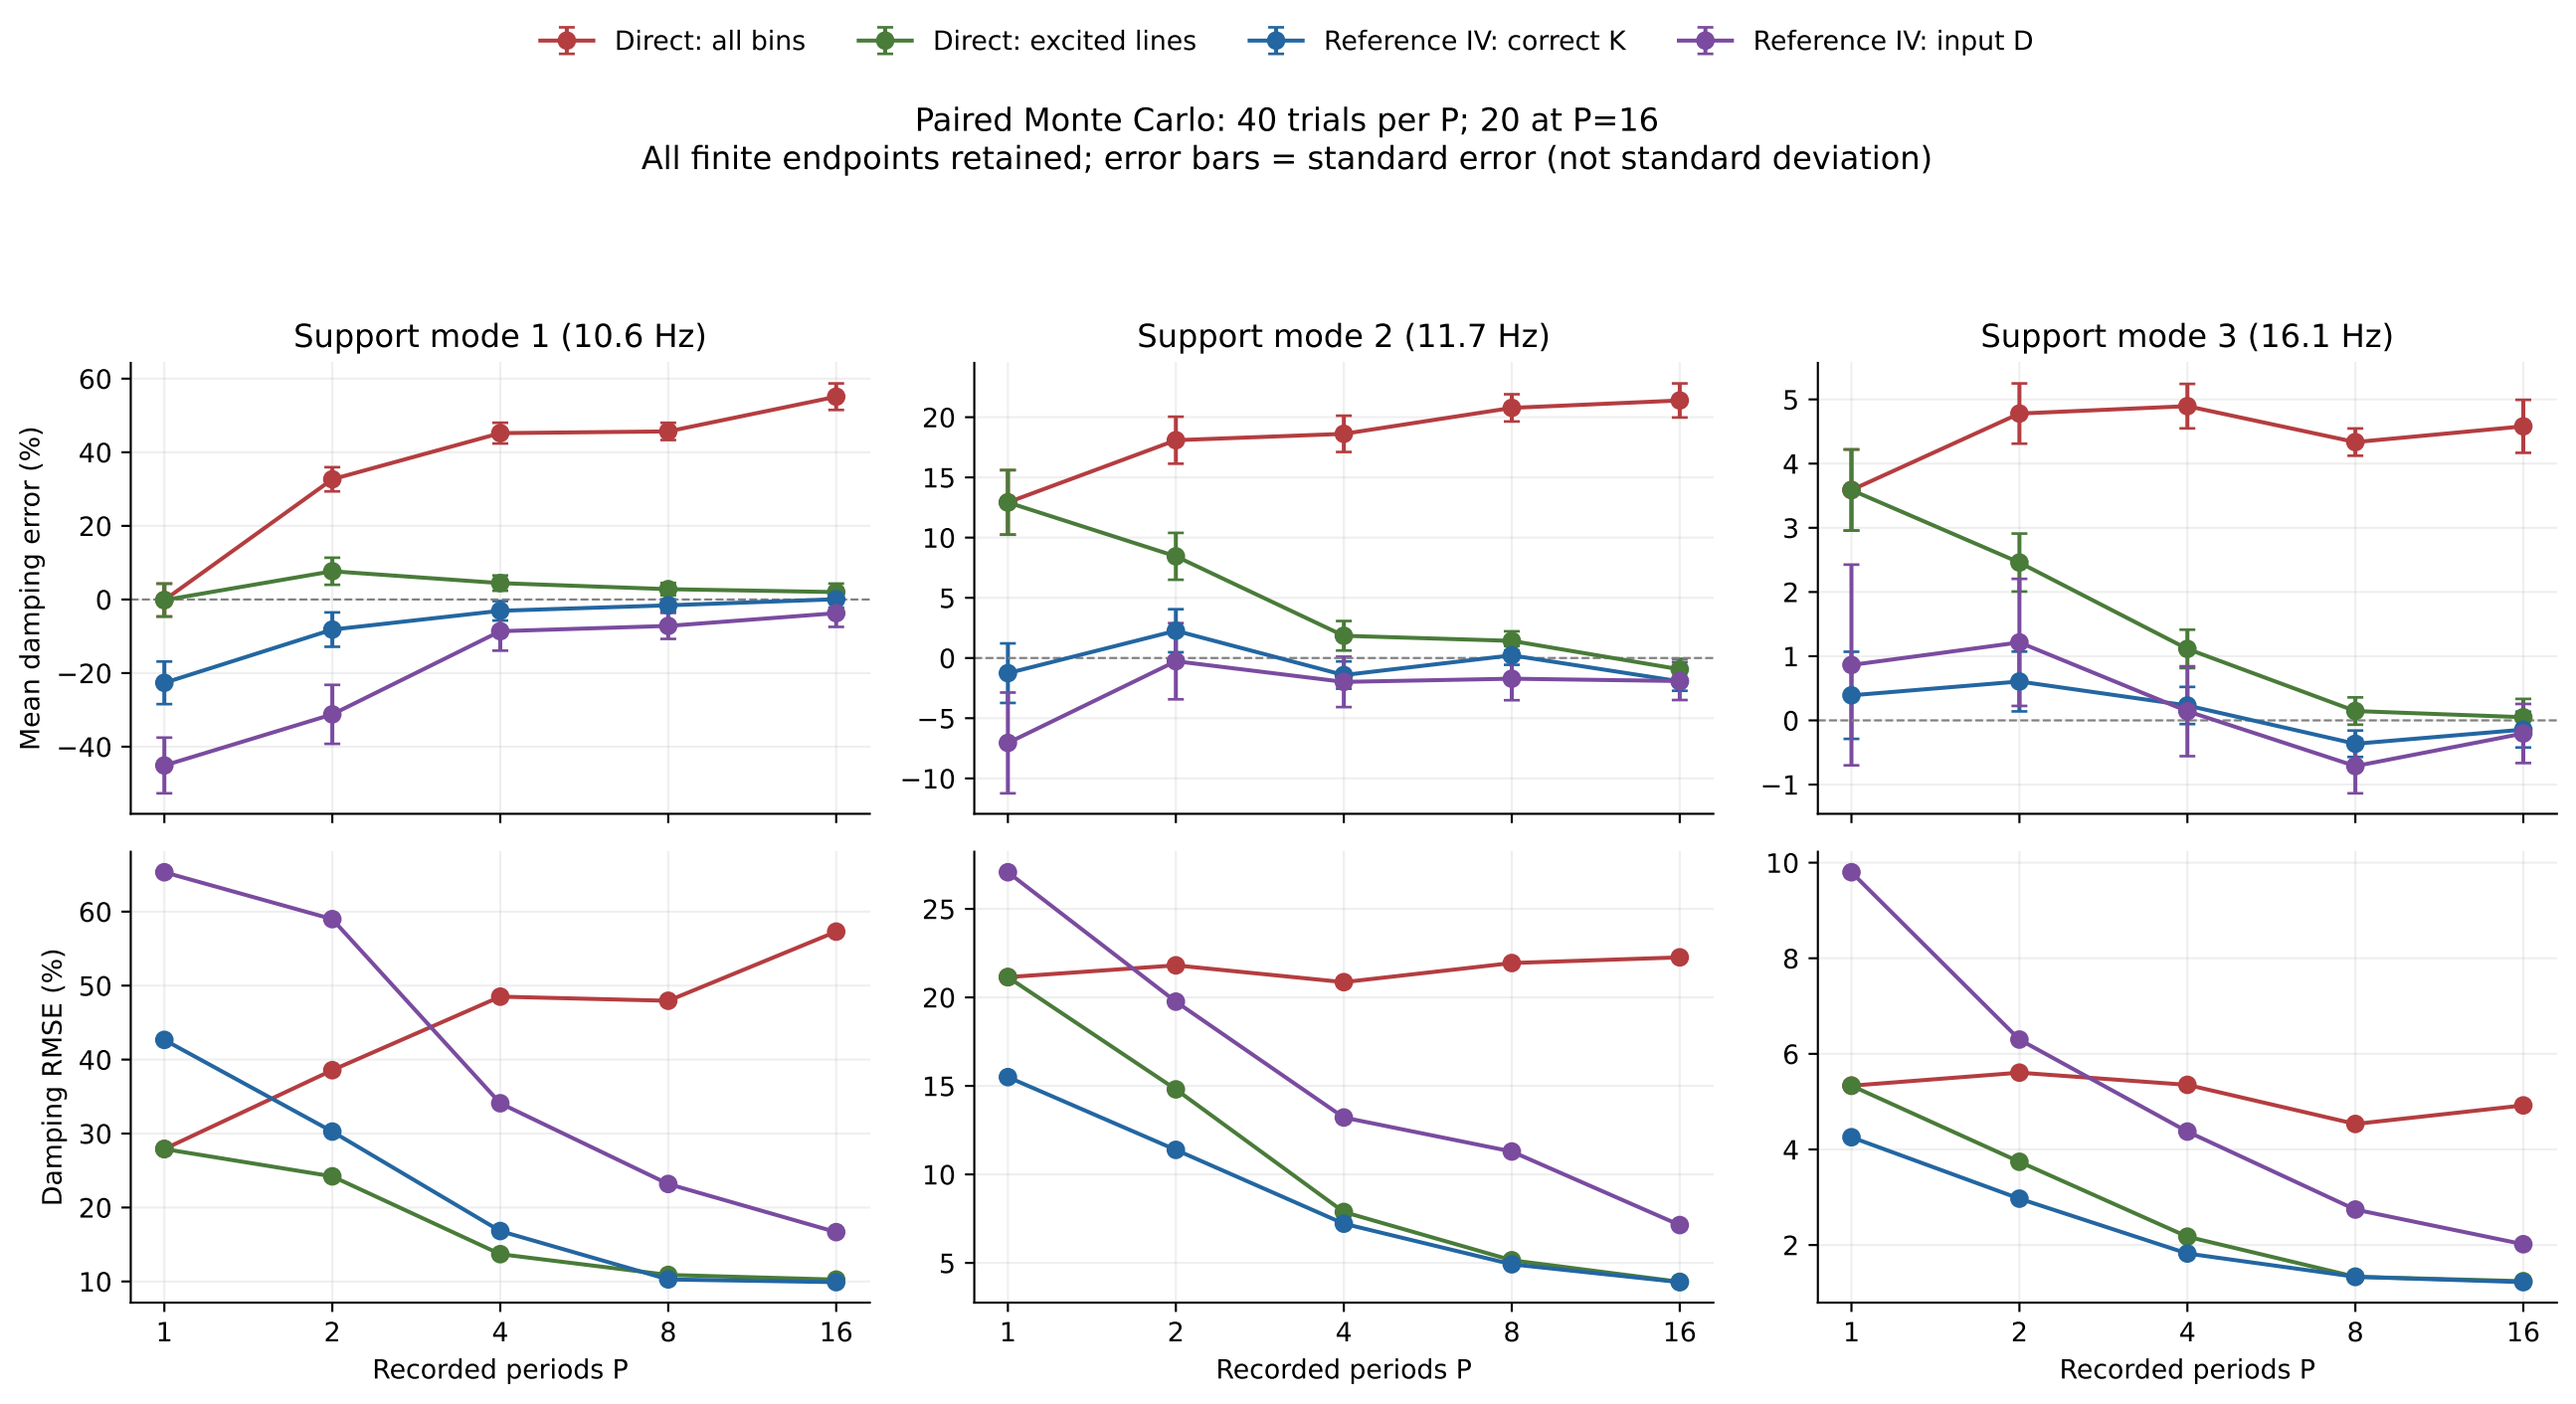
Direct: all bins
Direct: excited lines
Reference IV: correct K
Reference IV: input D
Paired Monte Carlo: 40 trials per P; 20 at P=16
All finite endpoints retained; error bars = standard error (not standard deviation)
Support mode 1 (10.6 Hz)
Support mode 2 (11.7 Hz)
Support mode 3 (16.1 Hz)
Mean damping error (%)
Damping RMSE (%)
Recorded periods P
Recorded periods P
Recorded periods P