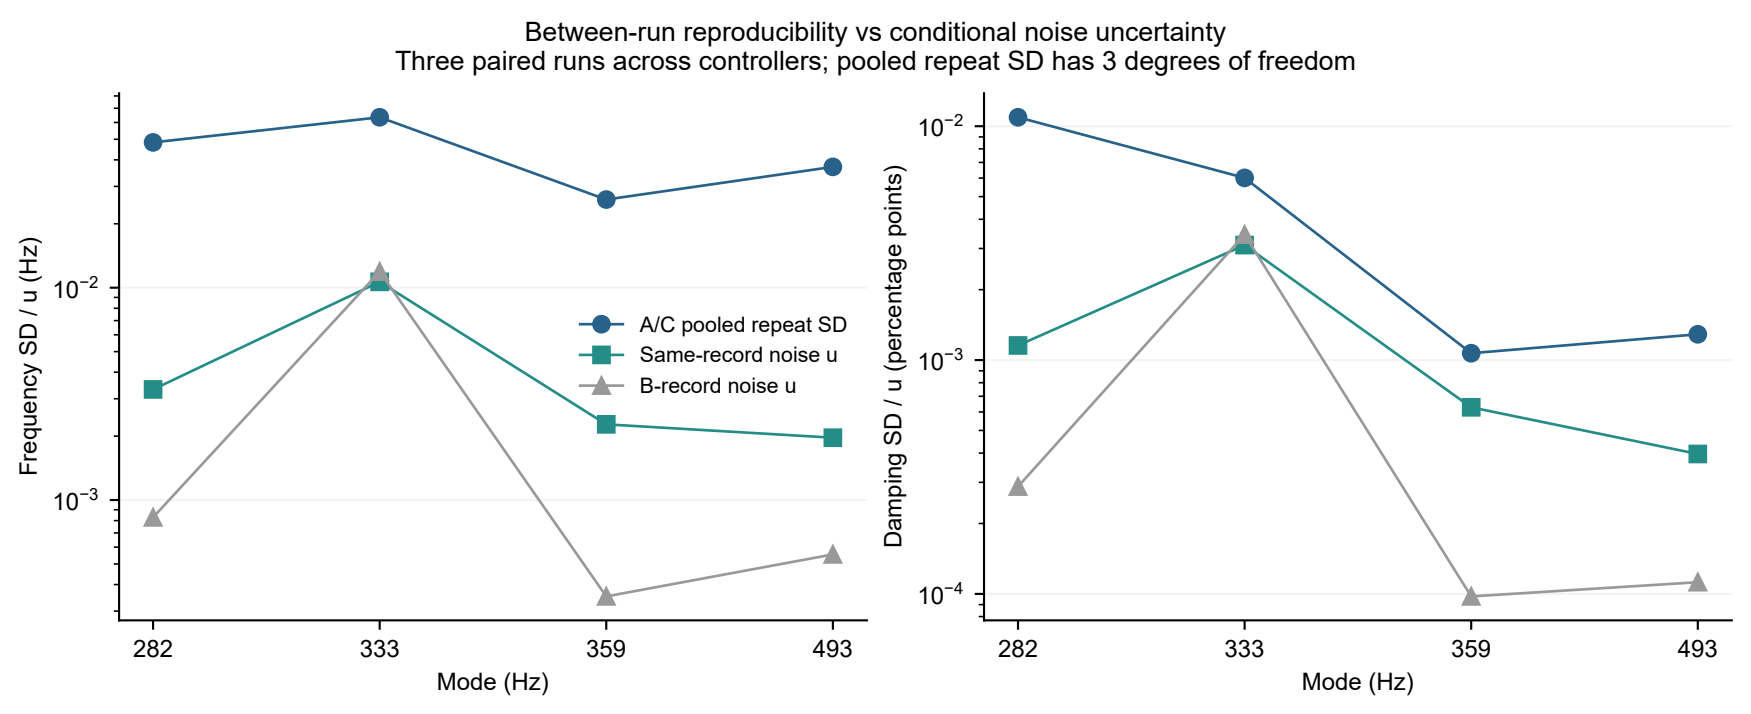
Between-run reproducibility vs conditional noise uncertainty
Three paired runs across controllers; pooled repeat SD has 3 degrees of freedom
Frequency SD / u (Hz)
Damping SD / u (percentage points)
A/C pooled repeat SD
Same-record noise u
B-record noise u
Mode (Hz)
Mode (Hz)
282
333
359
493