


Cross-talk and target preservation: offline held-out FRF


Nonparametric: reference-branch L = 5 samples (1.000 ms); SRIVC: static fallback (no accepted dynamic correction)

Strong static baseline — Nonparametric FIR design — SRIVC route: static fallback (= gray baseline)

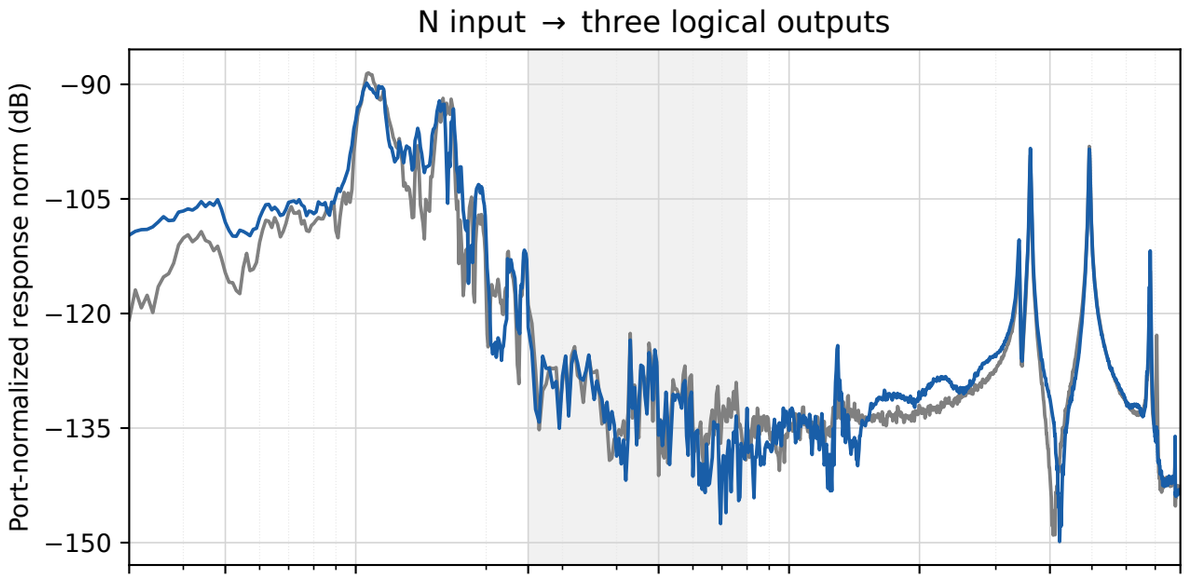

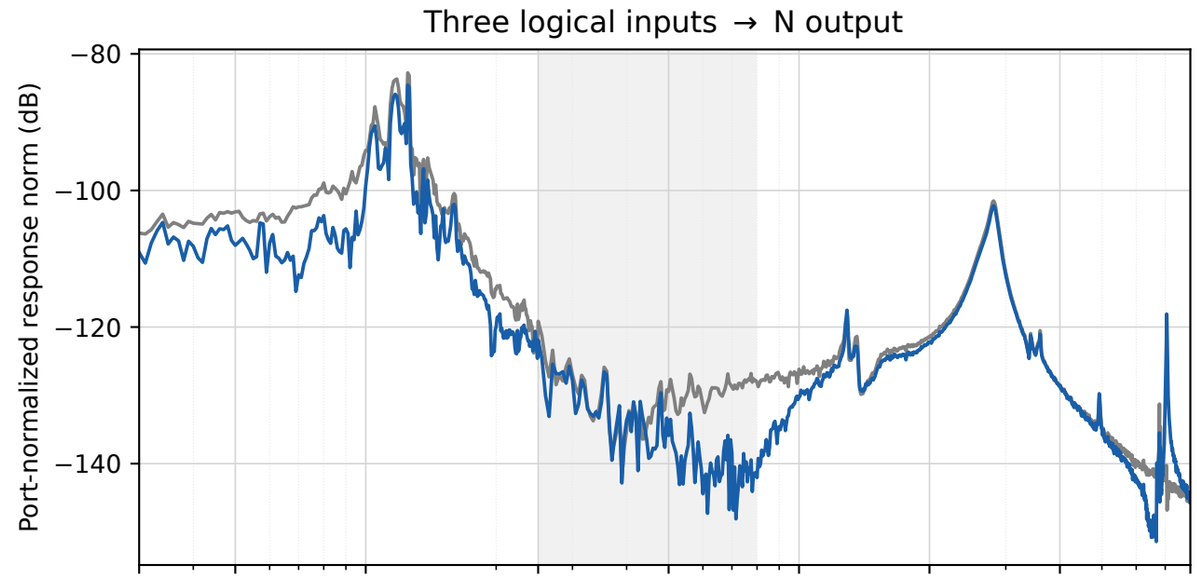

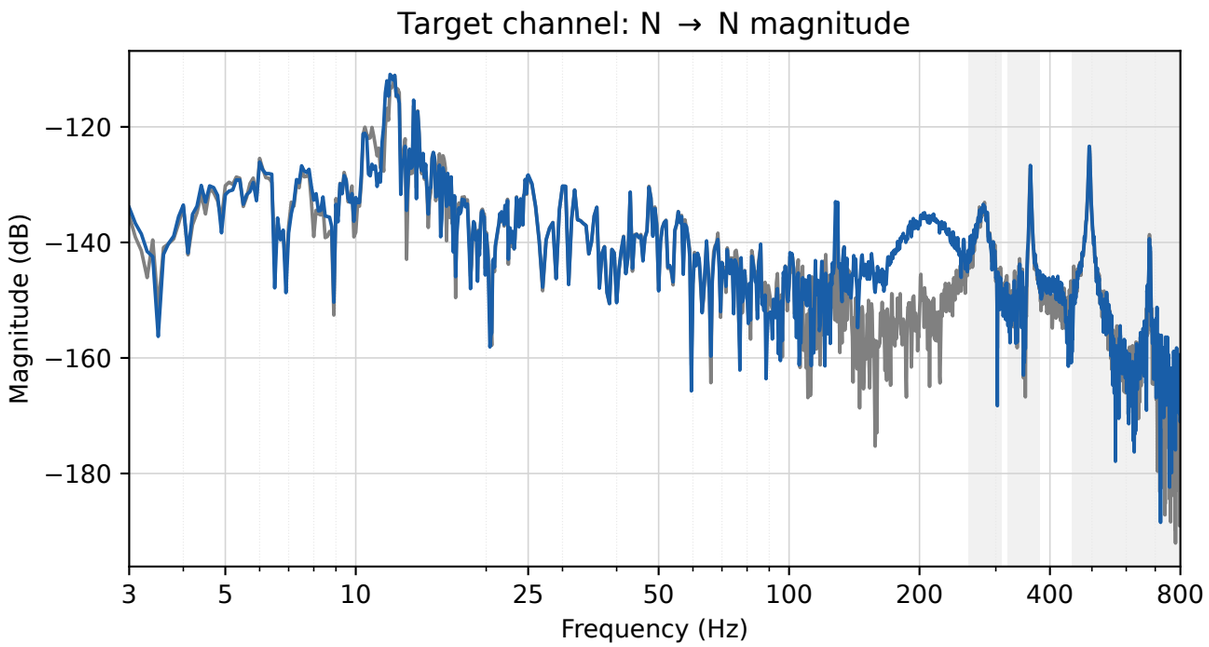

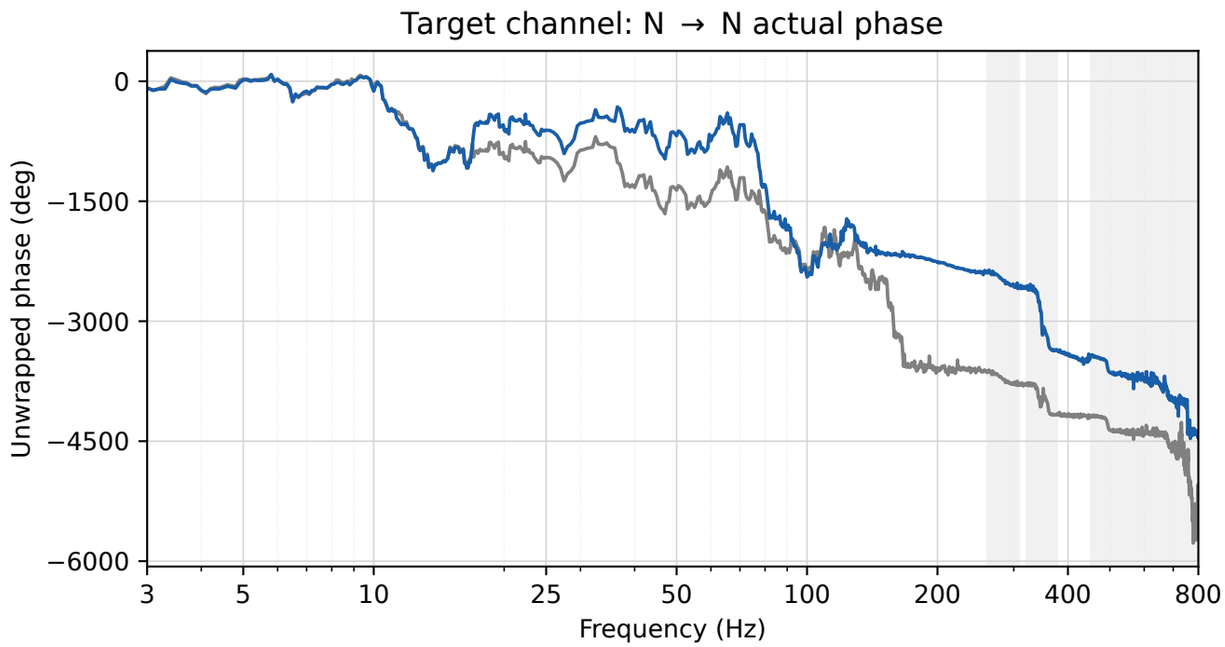

NN complex error relative to the static target delayed by 2L: nonparametric 40.82%; SRIVC 0.00% (unweighted grid norm, 3--800 Hz).

Gray bands: primary cross-talk band 25--80 Hz (top); target-preservation bands 260--310, 320--380 and 450--800 Hz (bottom).

Port norms use fixed static scales and are comparison metrics, not physical energy. The three logical directions need not be orthogonal.

Actual response phase is retained; 2L describes the NN target reference, not a uniform MIMO delay. This is an offline check, not hardware performance.