
Continuous phase: offline held-out FRF, training-selected decoupling routes

Nonparametric: reference-branch L = 5 samples (1.000 ms); SRIVC: static fallback (no accepted dynamic correction)

Strong static baseline — FIR designed from nonparametric FRF — SRIVC route: static fallback (= gray baseline)

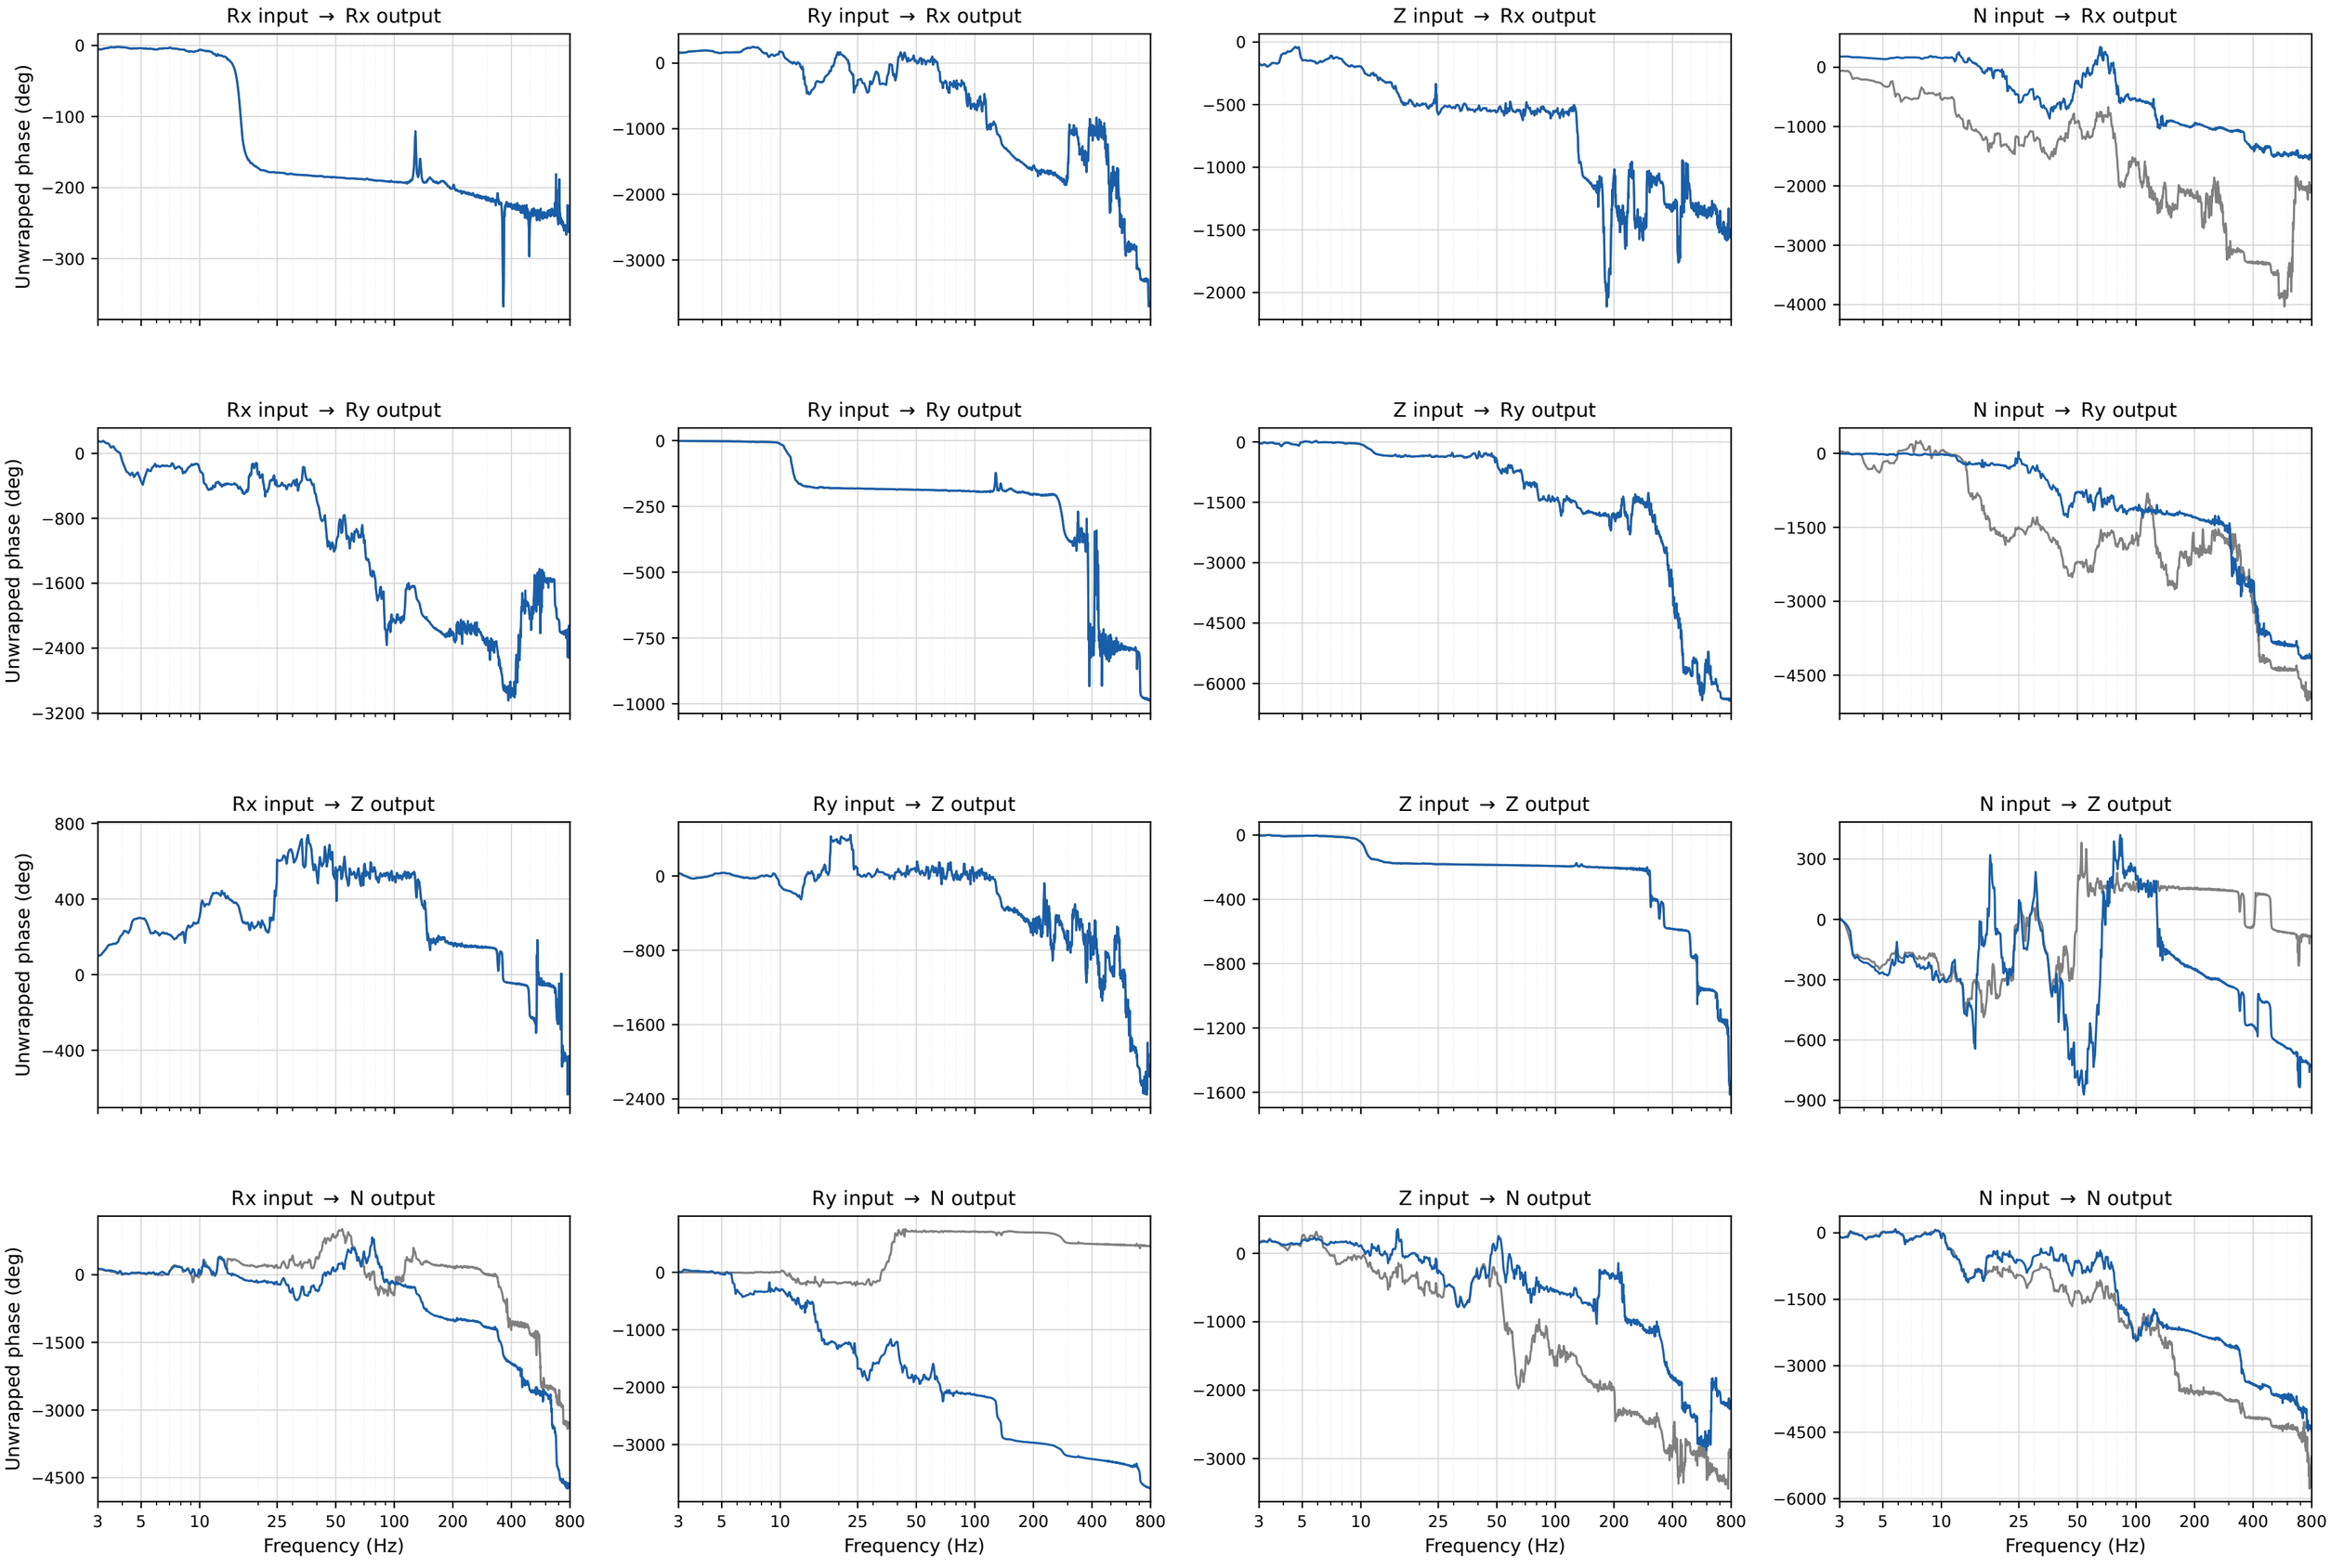

Fixed unit-norm static port directions; recorded units. Actual phase is retained. Reference-branch L is not a uniform delay of the full MIMO plant.