

MTE 204 Numerical Methods

Project 2

Due Date: Thursday November 28, 2024, 11:59pm

Jacob Wielowieyski: 21004619 & Yarema Dzulynsky: 21014161

Instructor: Homeyra Pourmohammadali

1. Problem 1

1.1. Matrix Equations

$$F_i = [k] \times x_i = \begin{bmatrix} k_i & -k_i \\ -k_i & k_i \end{bmatrix} \times x_i$$

The k matrix in this problem is given by the stiffness of each spring. Thus, the element matrix equations for this problem are:

$$\text{Spring 1} = \begin{bmatrix} 0.25 & -0.25 \\ -0.25 & 0.25 \end{bmatrix} \quad \text{Spring 2} = \begin{bmatrix} 0.5 & -0.5 \\ -0.5 & 0.5 \end{bmatrix} \quad \text{Spring 3} = \begin{bmatrix} 1.5 & -1.5 \\ -1.5 & 1.5 \end{bmatrix}$$

$$\text{Spring 4} = \begin{bmatrix} 0.75 & -0.75 \\ -0.75 & 0.75 \end{bmatrix} \quad \text{Spring 5} = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix}$$

Combining all of the above equations to create a system, we get the following global assembled matrix equations.

$$\begin{bmatrix} F_1 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 2 \end{bmatrix} = \begin{bmatrix} 0.25 & -0.25 & 0 & 0 & 0 & 0 \\ -0.25 & 0.25 + 0.5 & -0.5 & 0 & 0 & 0 \\ 0 & -0.5 & 0.5 + 1.5 & -1.5 & 0 & 0 \\ 0 & 0 & -1.5 & 1.5 + 0.75 & -0.75 & 0 \\ 0 & 0 & 0 & -0.75 & 0.75 + 1 & -1 \\ 0 & 0 & 0 & 0 & -1 & 1 \end{bmatrix} \cdot \begin{bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \end{bmatrix}$$

Because $x_1 = 0$, we can simplify this system into:

$$\begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 2 \end{bmatrix} = \begin{bmatrix} 0.25 + 0.5 & -0.5 & 0 & 0 & 0 \\ -0.5 & 0.5 + 1.5 & -1.5 & 0 & 0 \\ 0 & -1.5 & 1.5 + 0.75 & -0.75 & 0 \\ 0 & 0 & -0.75 & 0.75 + 1 & -1 \\ 0 & 0 & 0 & -1 & 1 \end{bmatrix} \cdot \begin{bmatrix} x_2 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \end{bmatrix}$$

1.2. Problem 1 Answers

Solving this system with MATLAB, we get the following results. The node displacements (given by the x vector) for each node are:

$$\begin{bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \end{bmatrix} = \begin{bmatrix} 0 \\ 8 \\ 12 \\ \frac{40}{3} \\ 16 \\ 18 \end{bmatrix} m$$

The displacement at the final node is given by $x_6 = 18\text{m}$. The displacement vs position plot for all the nodes is given in figure 1.

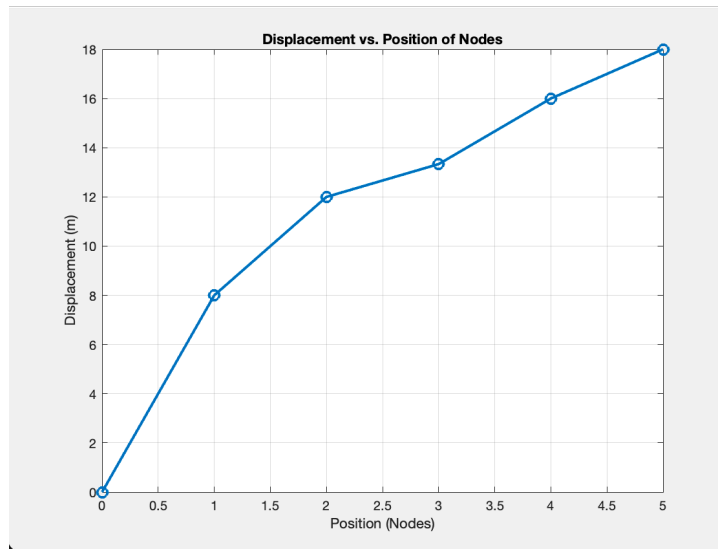


Figure 1. Displacement vs Position Plot of Each Node - P1

2. Problem 2

2.1. Matrix Equations

The k matrix in this problem is derived from the following equation.

$$\delta = \frac{PL}{EA}$$

Delta is the displacement, so we will call it x. P is our force. Thus, the remaining components—representing stiffness—are k. Therefore, the element matrix equations for this problem are:

$$\text{Cylinder 1} = 10^9 \cdot \begin{bmatrix} 1.4632 & -1.4632 \\ -1.4632 & 1.4632 \end{bmatrix} \quad \text{Cylinder 2} = 10^9 \cdot \begin{bmatrix} 0.4335 & -0.4335 \\ -0.4335 & 0.4335 \end{bmatrix}$$

$$\text{Cylinder 3} = 10^9 \cdot \begin{bmatrix} 0.0813 & -0.0813 \\ -0.0813 & 0.0813 \end{bmatrix}$$

Combining all of the above equations to create a system, we get the following global assembled matrix equations.

$$\begin{bmatrix} F_1 \\ 0 \\ 0 \\ 1000 \end{bmatrix} = 10^9 \cdot \begin{bmatrix} 1.4632 & -1.4632 & 0 & 0 \\ -1.4632 & 1.8967 & -0.4335 & 0 \\ 0 & -0.4335 & 0.5148 & -0.0813 \\ 0 & 0 & -0.0813 & 0.0813 \end{bmatrix} \cdot \begin{bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \end{bmatrix}$$

Because $x_1 = 0$, we can simplify this system into:


$$\begin{bmatrix} 0 \\ 0 \\ 1000 \end{bmatrix} = 10^9 \cdot \begin{bmatrix} 1.897 & -0.4335 & 0 \\ -0.4335 & 0.5148 & -0.0813 \\ 0 & -0.0813 & -0.0813 \end{bmatrix} \cdot \begin{bmatrix} x_2 \\ x_3 \\ x_4 \end{bmatrix}$$

2.2. Problem 2 Answers

Solving this system with MATLAB, we get the following results. The node displacements (given by the x vector) for each node are:

$$\begin{bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \end{bmatrix} = 10^{-5} \cdot \begin{bmatrix} 0 \\ 0.0683 \\ 0.299 \\ 1.5292 \end{bmatrix} m$$

The displacement at the final node is given by $x_4 = 10^{-5} \cdot 1.5292m$. The displacement vs position plot for all the nodes is given in figure 2.

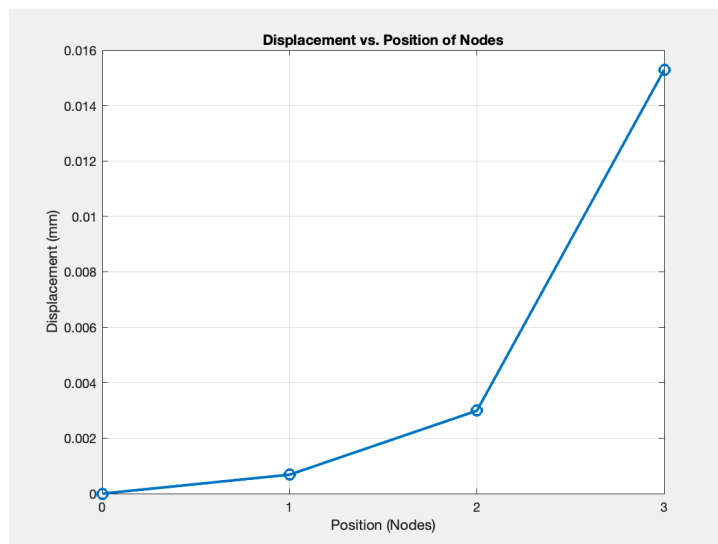

[illegible]

$$k_3 = 10^7 \times$$

$$k_4 = 10^7 \times$$

$$k_5 = 10^7 \times$$

$$k_6 = 10^7 \times$$

$$k_7 = 10^7 \times$$

Combining all of the above equations to create a system, we get the following global assembled stiffness matrix.

$$10^8 \cdot \begin{bmatrix} 0.8333 & 0.2887 & -0.1667 & -0.2887 & -0.6667 & 0 & 0 & 0 & 0 & 0 \\ 0.2887 & 0.5 & -0.2887 & -0.5 & 0 & 0 & 0 & 0 & 0 & 0 \\ -0.1667 & -0.2887 & 1 & 0 & -0.1667 & 0.2887 & -0.6667 & 0 & 0 & 0 \\ -0.2887 & -0.5 & 0 & 1 & 0.2887 & -0.5 & 0 & 0 & 0 & 0 \\ -0.6667 & 0 & -0.1667 & 0.2887 & 1.6667 & 0 & -0.1667 & -0.2887 & -0.6667 & 0 \\ 0 & 0 & 0.2887 & -0.5 & 0 & 1 & -0.2887 & -0.5 & 0 & 0 \\ 0 & 0 & -0.6667 & 0 & -0.1667 & -0.2887 & 1 & 0 & -0.1667 & 0.2887 \\ 0 & 0 & 0 & 0 & -0.2887 & -0.5 & 0 & 1.0000 & 0.2887 & -0.5 \\ 0 & 0 & 0 & 0 & -0.6667 & 0 & -0.1667 & 0.2887 & 0.8333 & -0.2887 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0.2887 & -0.5 & -0.2887 & 0.5 \end{bmatrix}$$

Recognizing that y is constrained at nodes 1 and 5 by the roller, we get the following simplified equation by removing rows and columns 2 and 10, corresponding to x_2 and x_{10} , which must be 0 as displacement is 0.

$$\begin{bmatrix} 0 \\ 0 \\ -2000 \\ 0 \\ 0 \\ -5000 \\ 0 \end{bmatrix} = 10^8 \times \begin{bmatrix} 0.833 & -0.167 & -0.289 & -0.667 & 0 & 0 & 0 & 0 \\ -0.167 & 1 & 0 & -0.167 & 0.289 & -0.667 & 0 & 0 \\ -0.289 & 0 & 1 & 0.289 & -0.5 & 0 & 0 & 0 \\ -0.667 & -0.167 & 0.289 & 1.667 & 0 & -0.167 & -0.289 & -0.667 \\ 0 & 0.289 & -0.5 & 0 & 1 & -0.289 & -0.5 & 0 \\ 0 & -0.667 & 0 & -0.167 & -0.289 & 1 & 0 & -0.167 \\ 0 & 0 & 0 & -0.289 & -0.5 & 0 & 1 & 0.289 \\ 0 & 0 & 0 & -0.667 & 0 & -0.167 & 0.289 & 0.833 \end{bmatrix} \times \begin{bmatrix} x_1 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \\ x_7 \\ x_8 \\ x_9 \end{bmatrix}$$

3.2. Problem 3 Answers

Solving this system with MATLAB, we get the following results. The global node displacements (given by the x vector) for each node are:

$$\text{Displacement} = 10^{-3} \times \begin{bmatrix} -0.0242 \\ 0 \\ 0.0180 \\ -0.0794 \\ -0.0004 \\ -0.1050 \\ -0.0123 \\ -0.1131 \\ 0.0364 \\ 0 \end{bmatrix} \text{ m}$$

The normal stresses in each member are:

$$\text{Normal Stresses in Each Member} = \begin{bmatrix} -7.939 \\ 3.969 \\ 2.165 \\ -2.165 \\ 6.134 \\ -12.269 \\ -5.052 \end{bmatrix} \text{ MPa}$$

The x and y components of displacement for each node is:

$$\text{x component} = 10^{-5} \times \begin{bmatrix} -2.419 \\ 1.803 \\ -0.03693 \\ -1.228 \\ 3.644 \end{bmatrix} \text{ m}$$

$$\text{y component} = 10^{-5} \times \begin{bmatrix} 0 \\ -7.938 \\ -10.50 \\ -11.31 \\ 0 \end{bmatrix} \text{ m}$$