

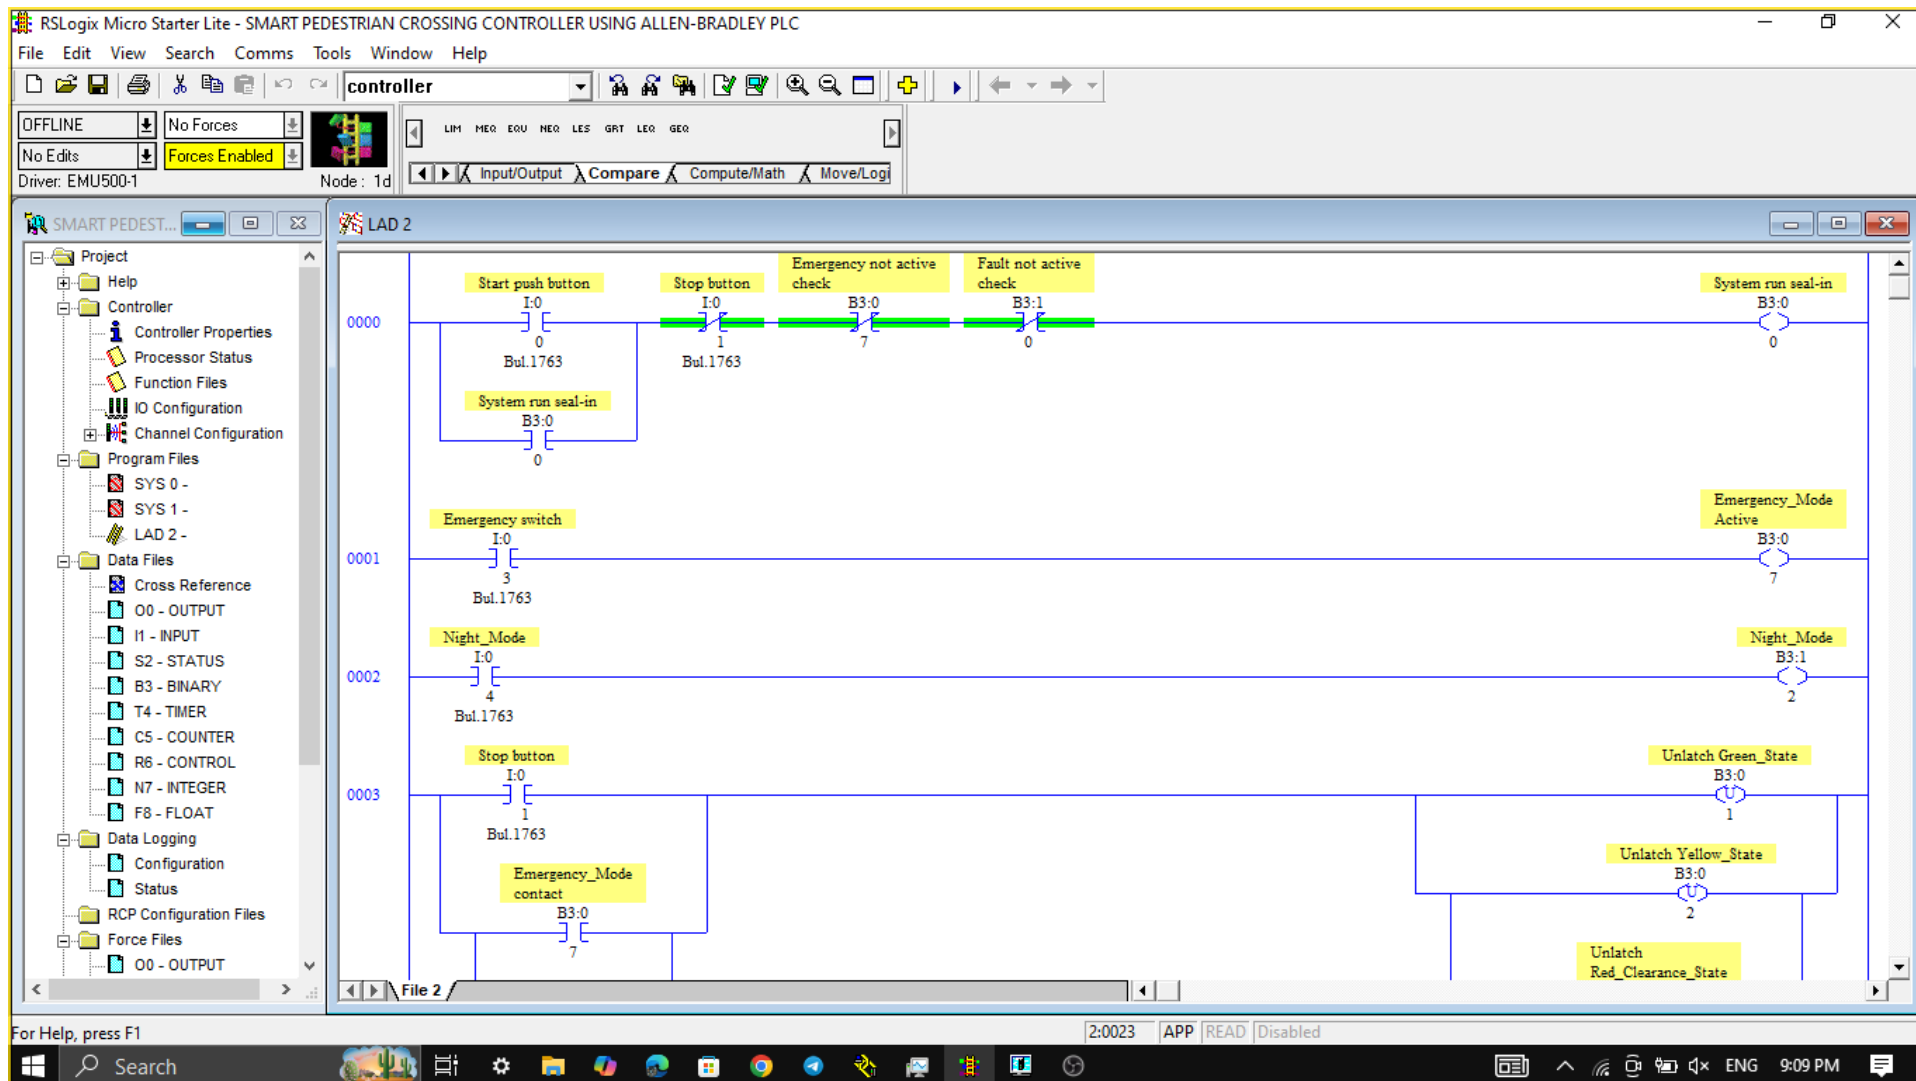


Figure 1: Start, stop, emergency, and night mode input logic.

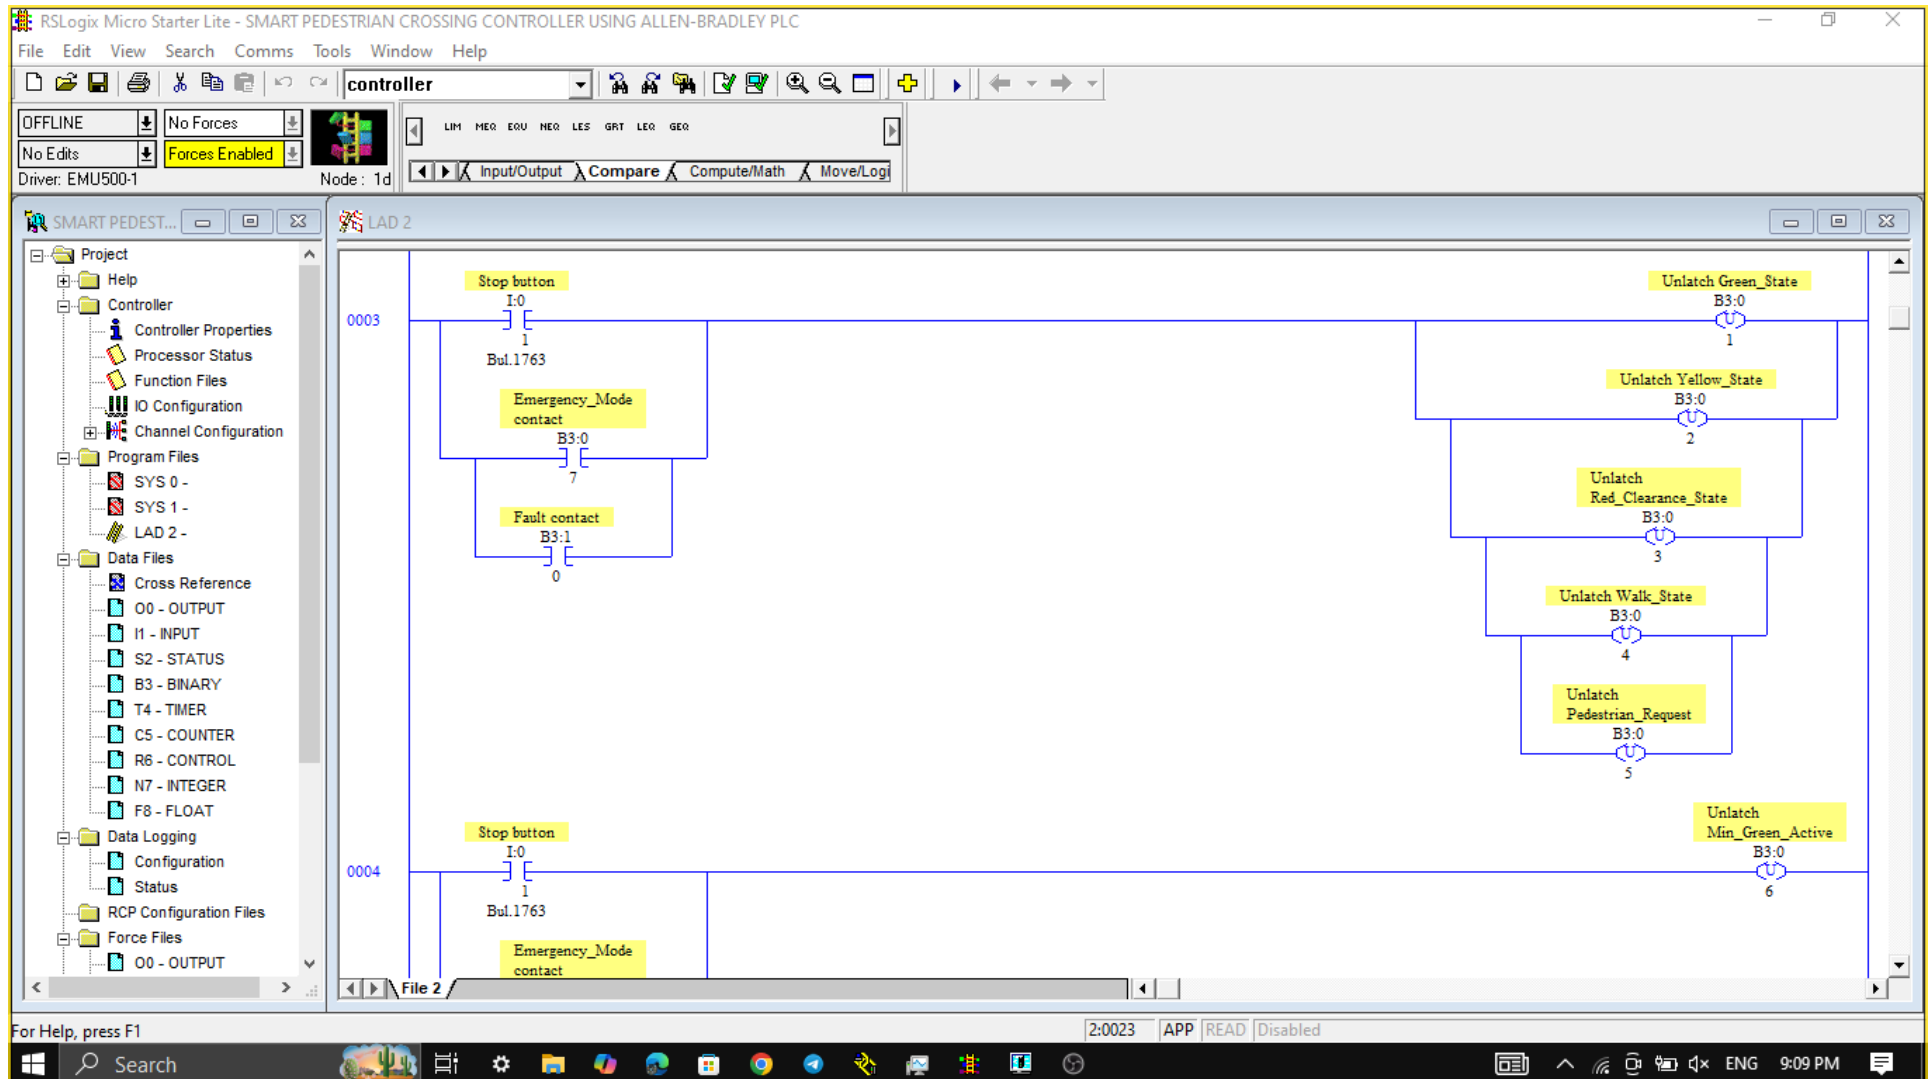


Figure 2: Stop, emergency, and fault reset logic for internal states.

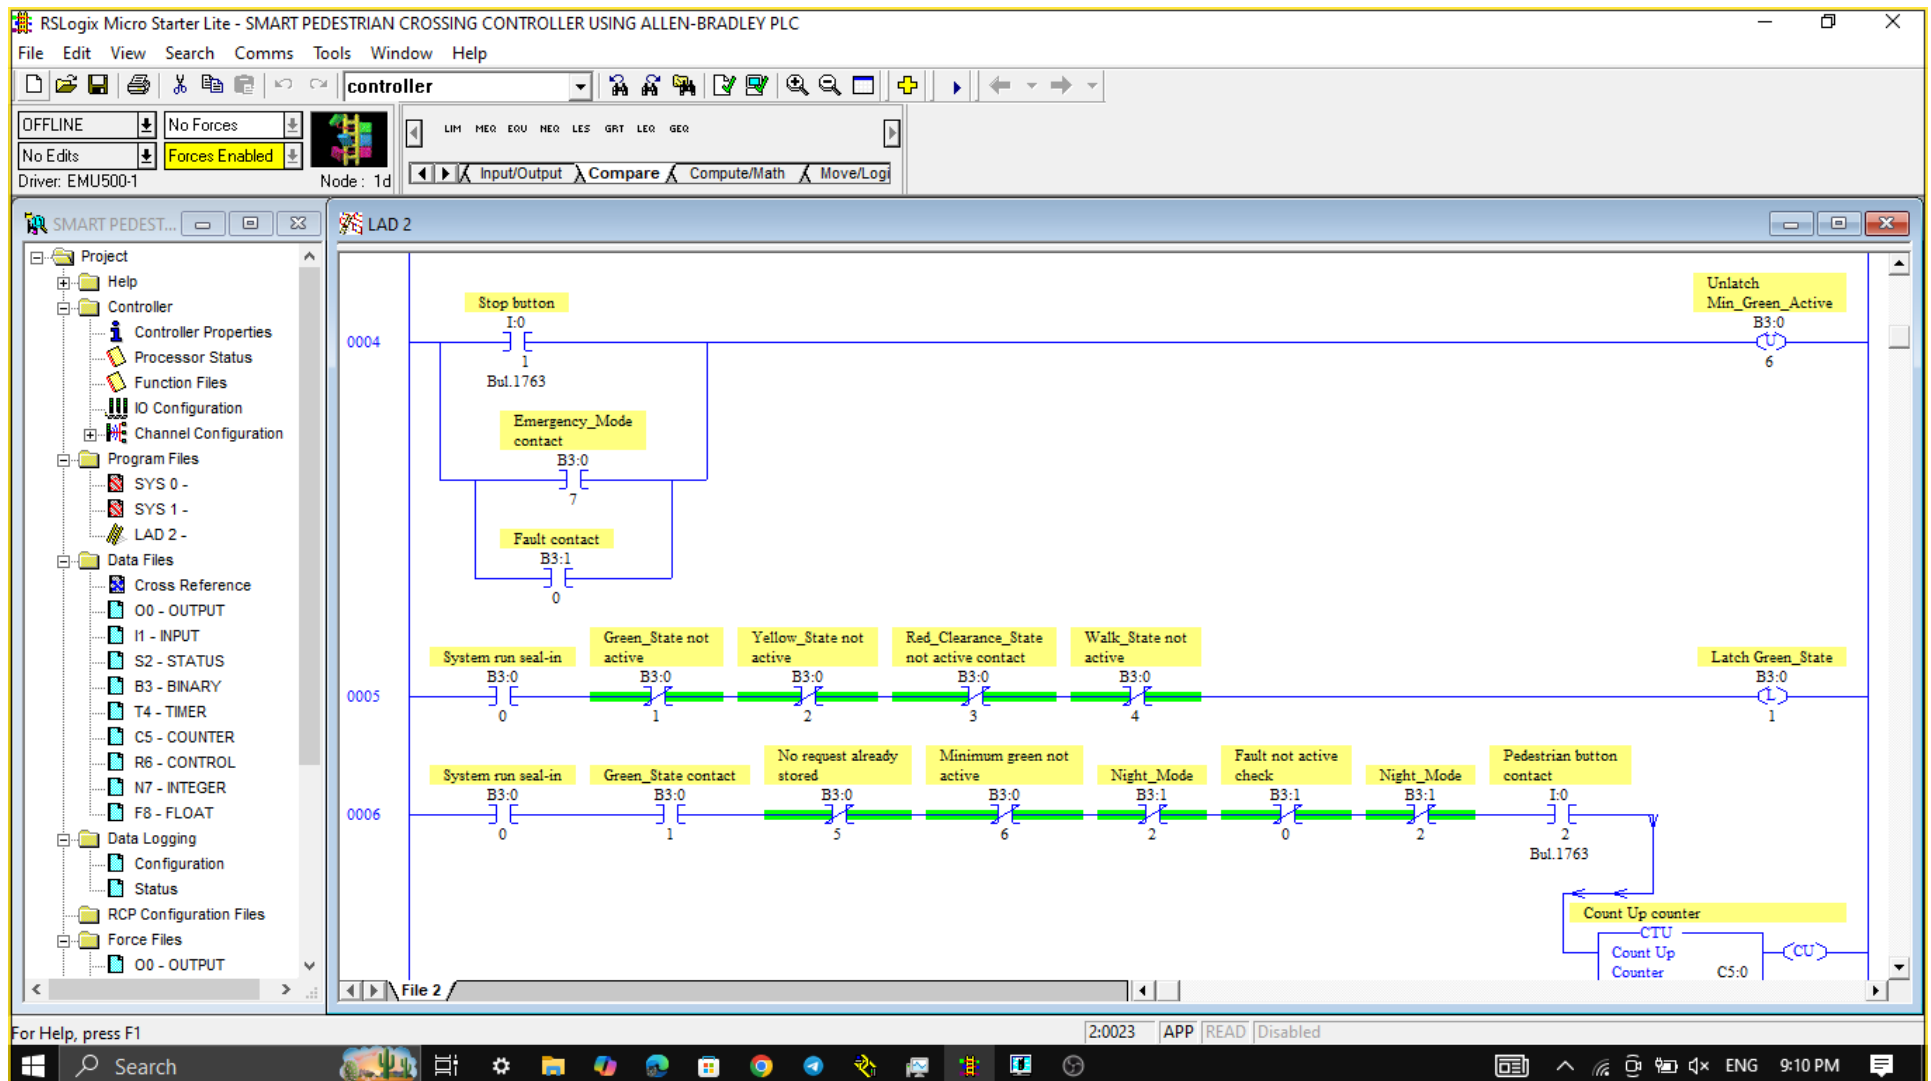


Figure 3: Green state latch and pedestrian request counter logic.

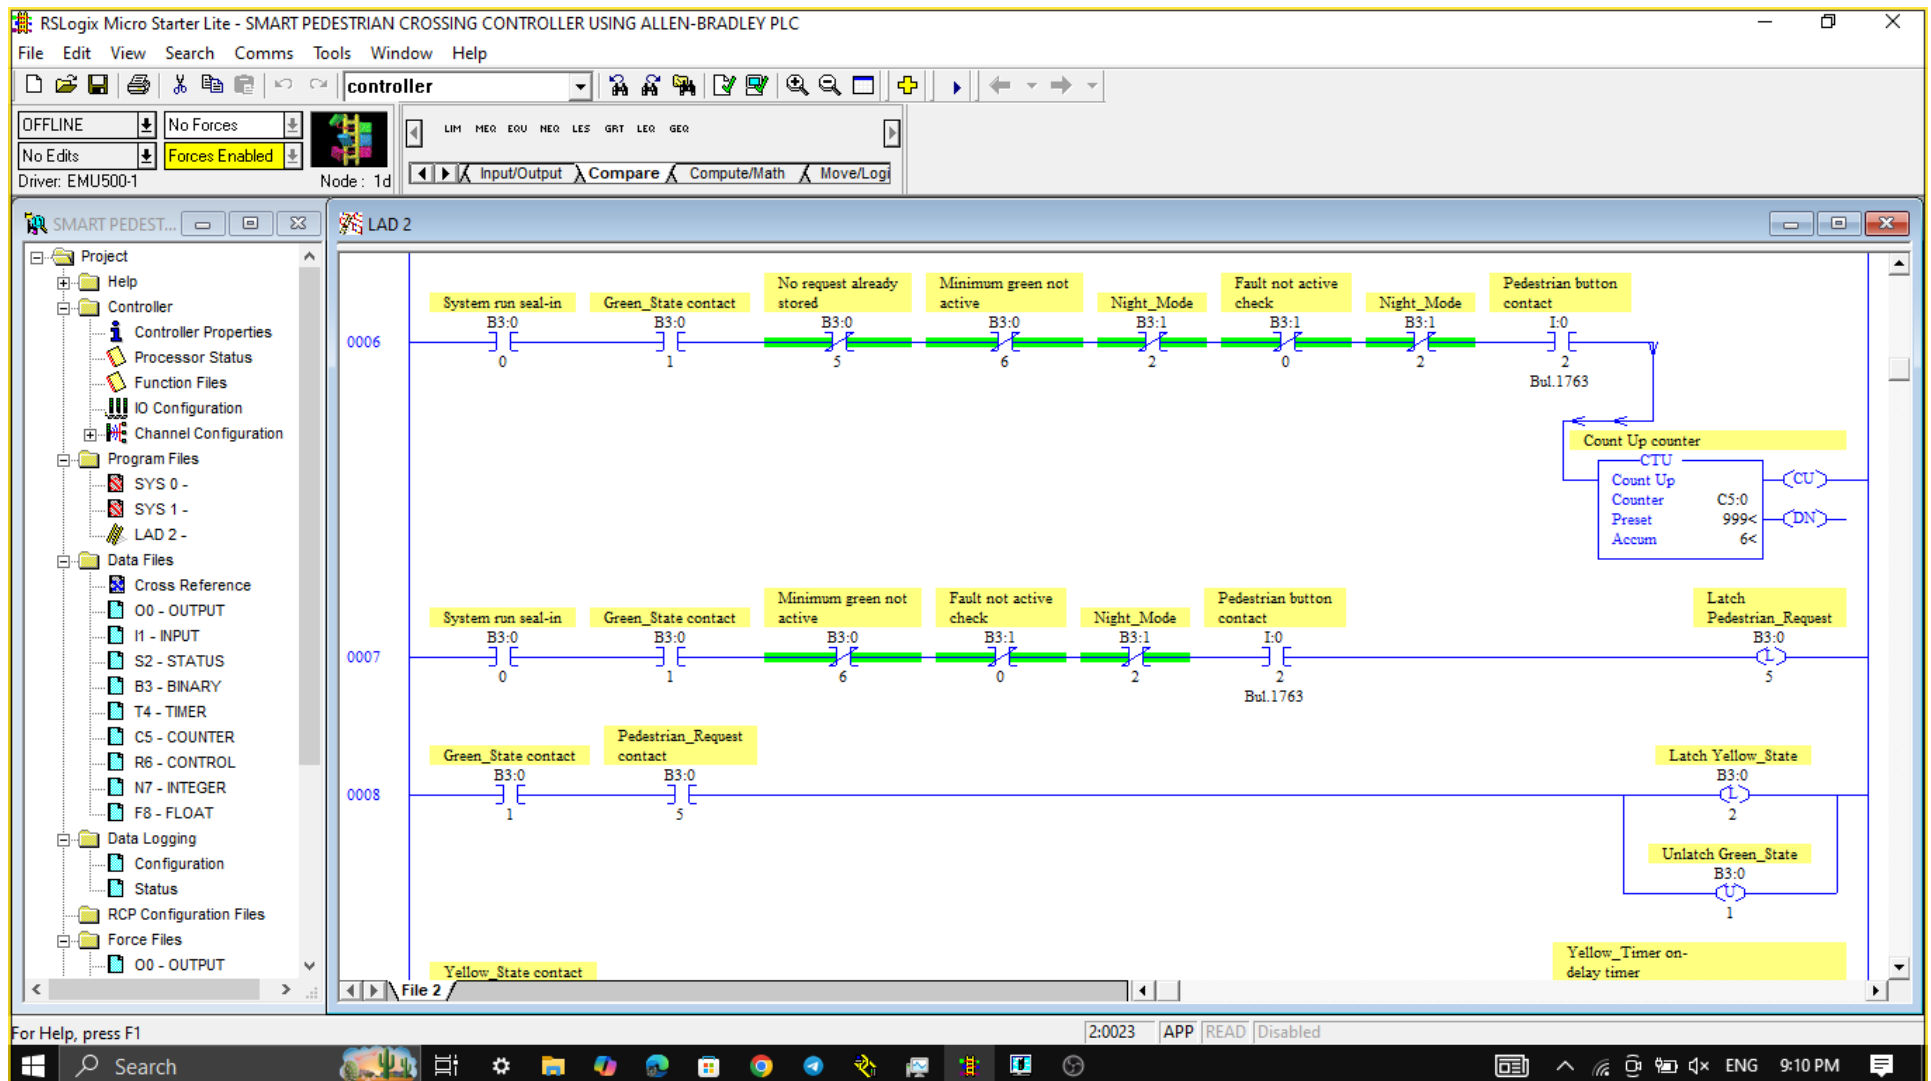


Figure 4: Pedestrian request latch and transition from green state to yellow state.

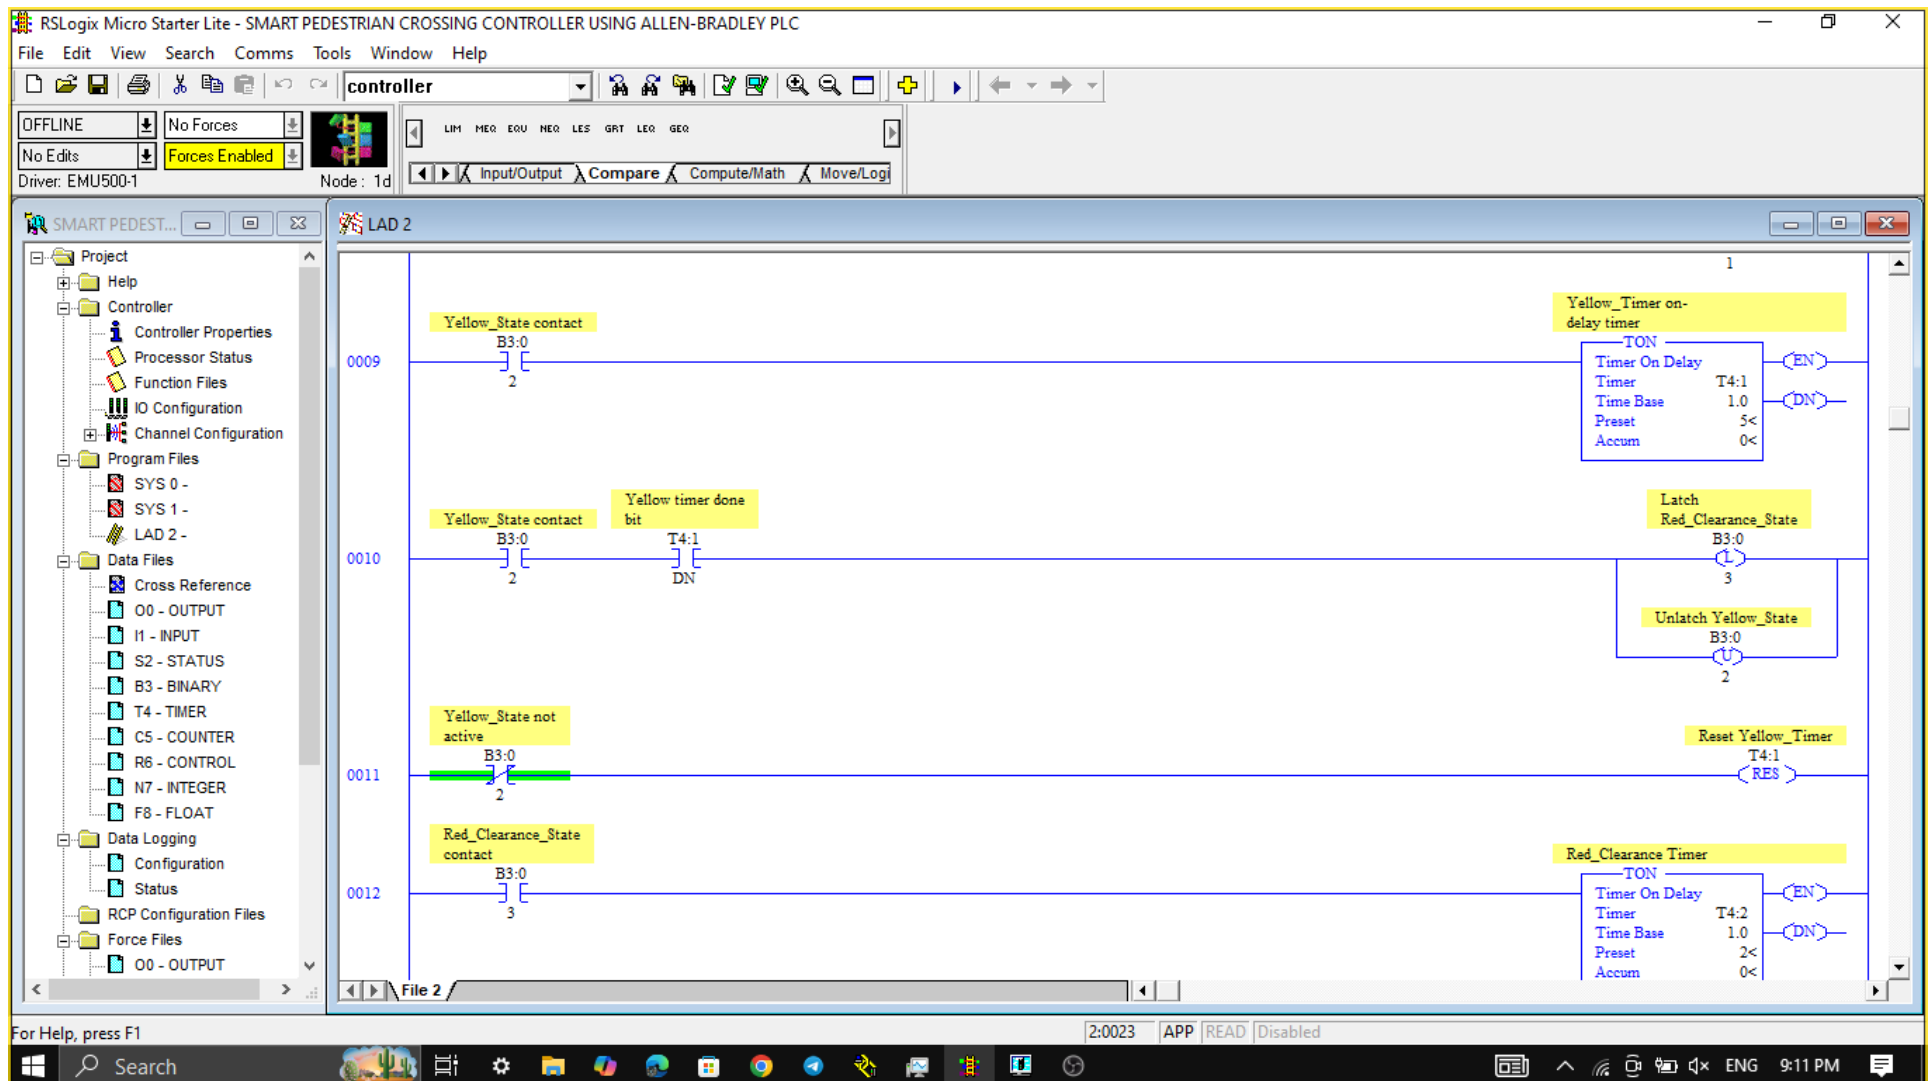


Figure 5: Yellow timer, yellow-to-red transition, and red clearance timer.

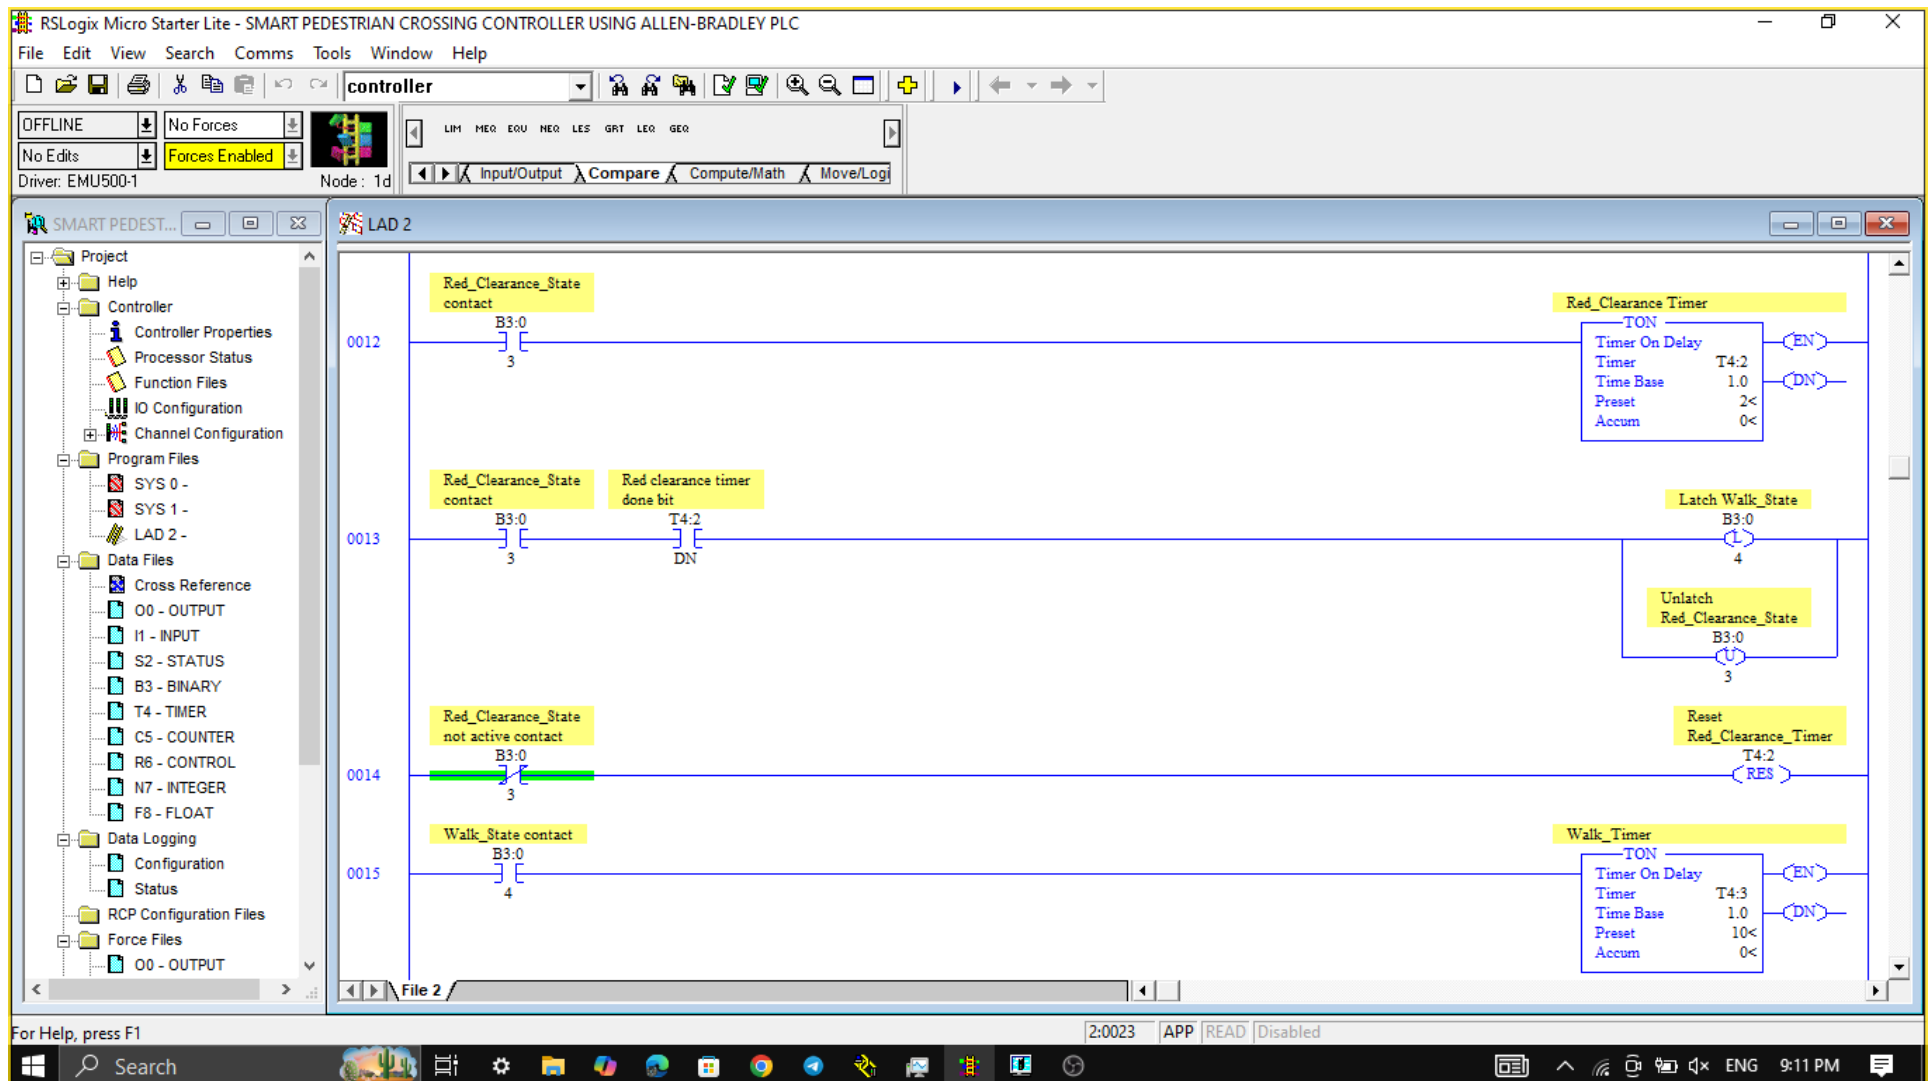


Figure 6: Red clearance state timer and transition to walk state.

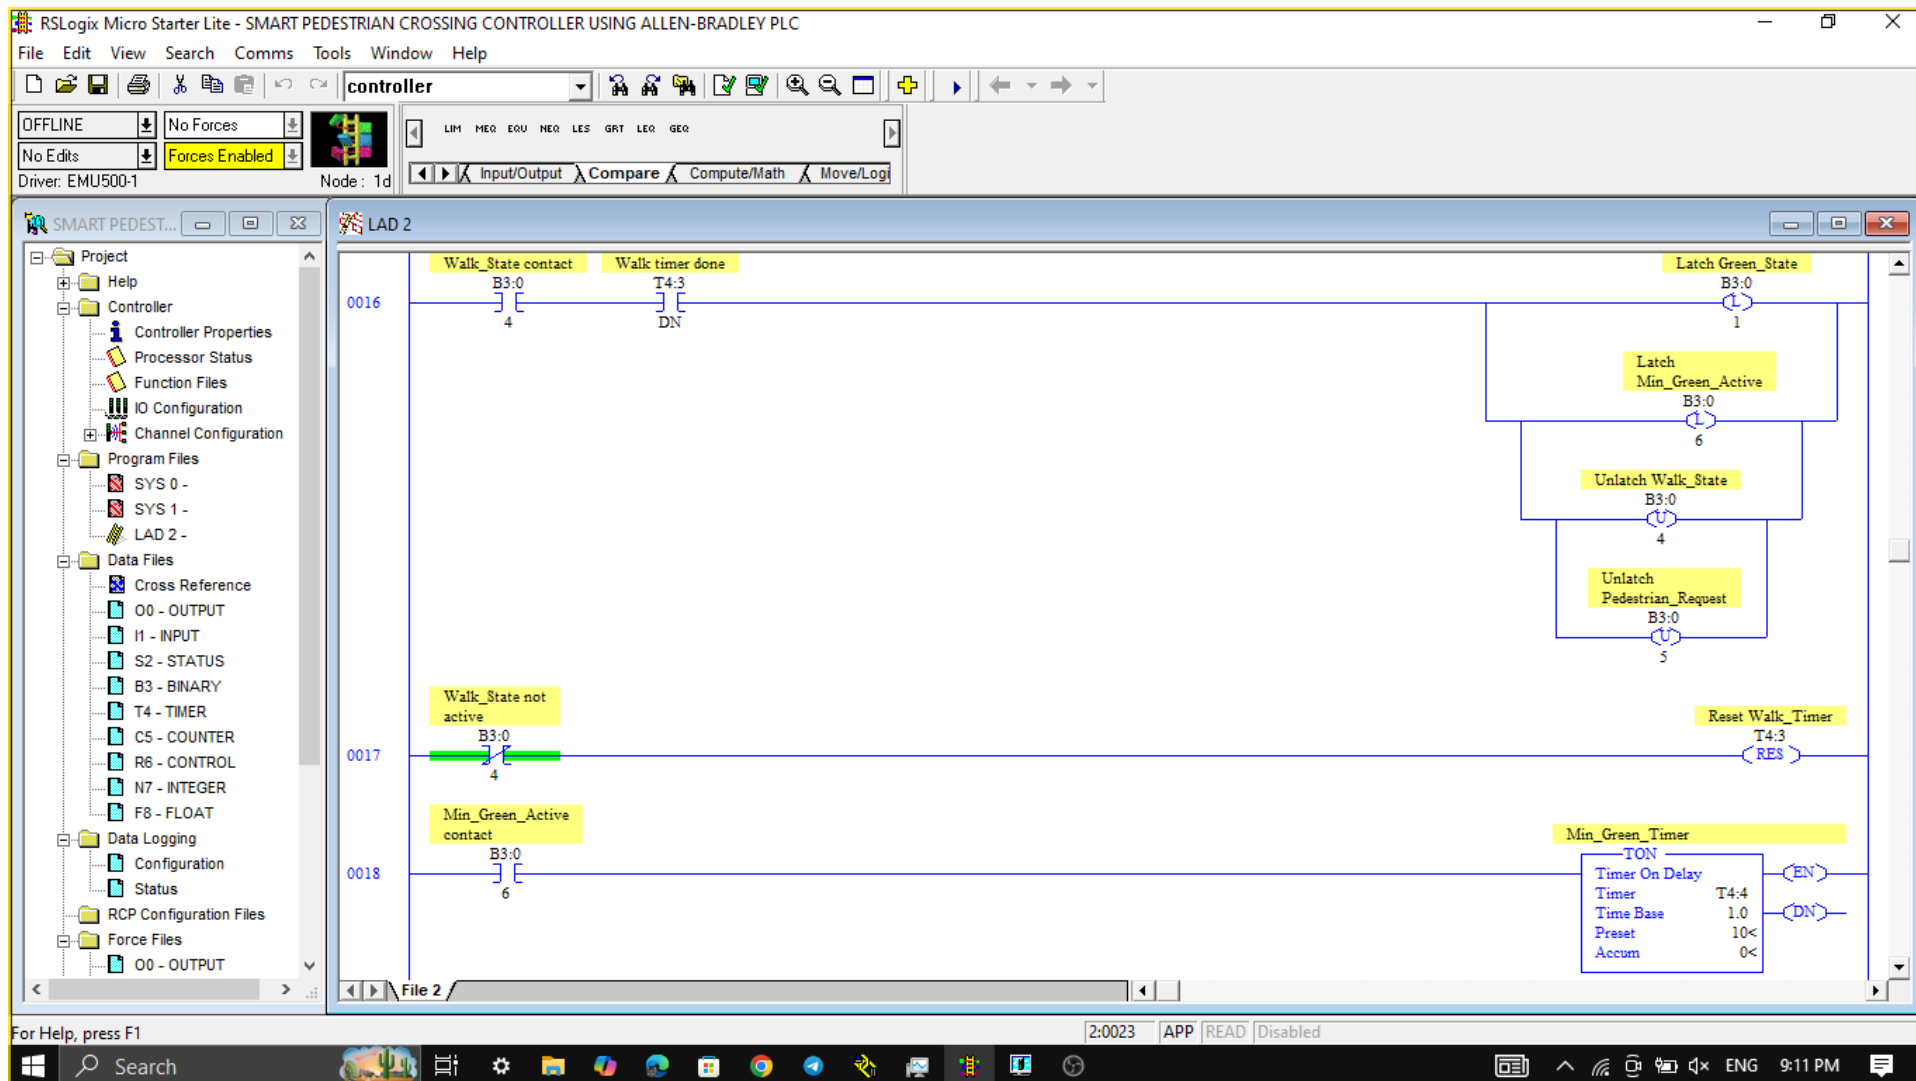


Figure 7: Walk timer completion, return to green state, and reset logic.

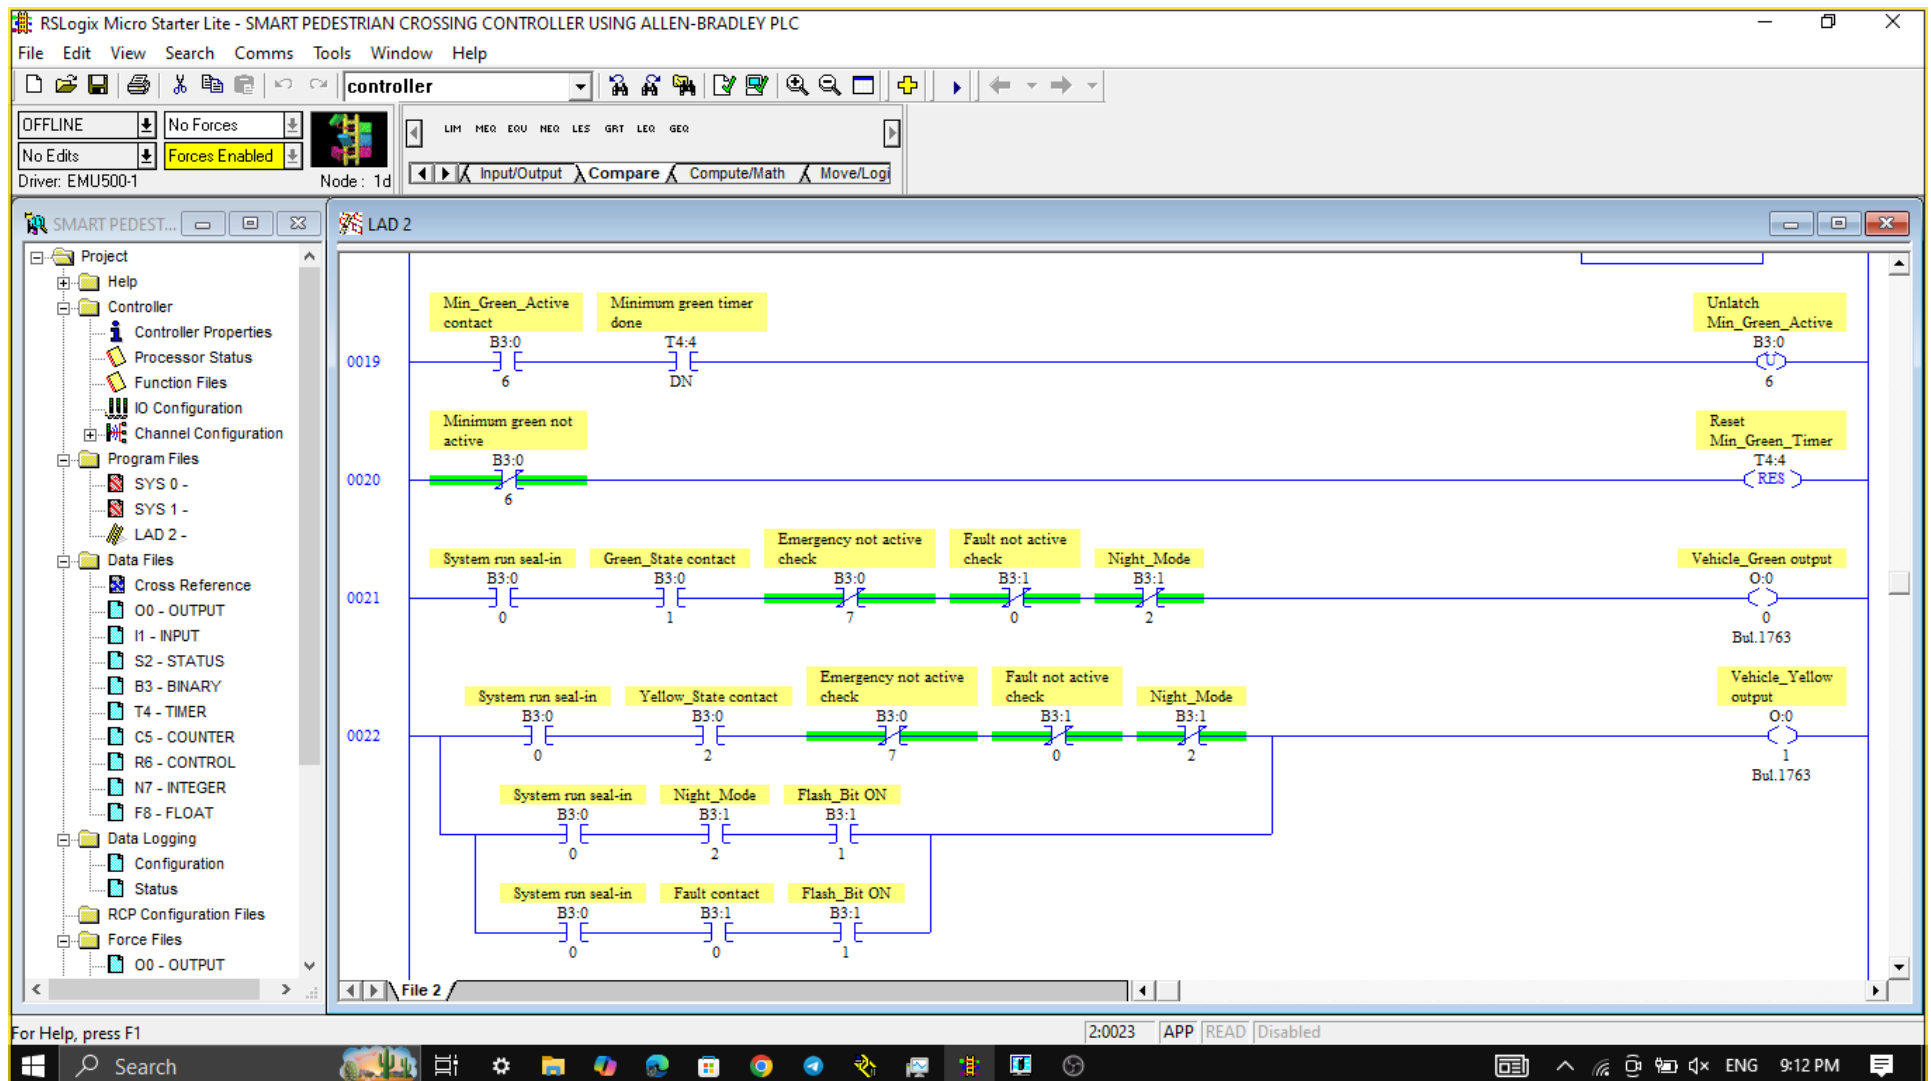


Figure 8: Vehicle output logic including green, yellow, night flash, and fault-related yellow blinking.



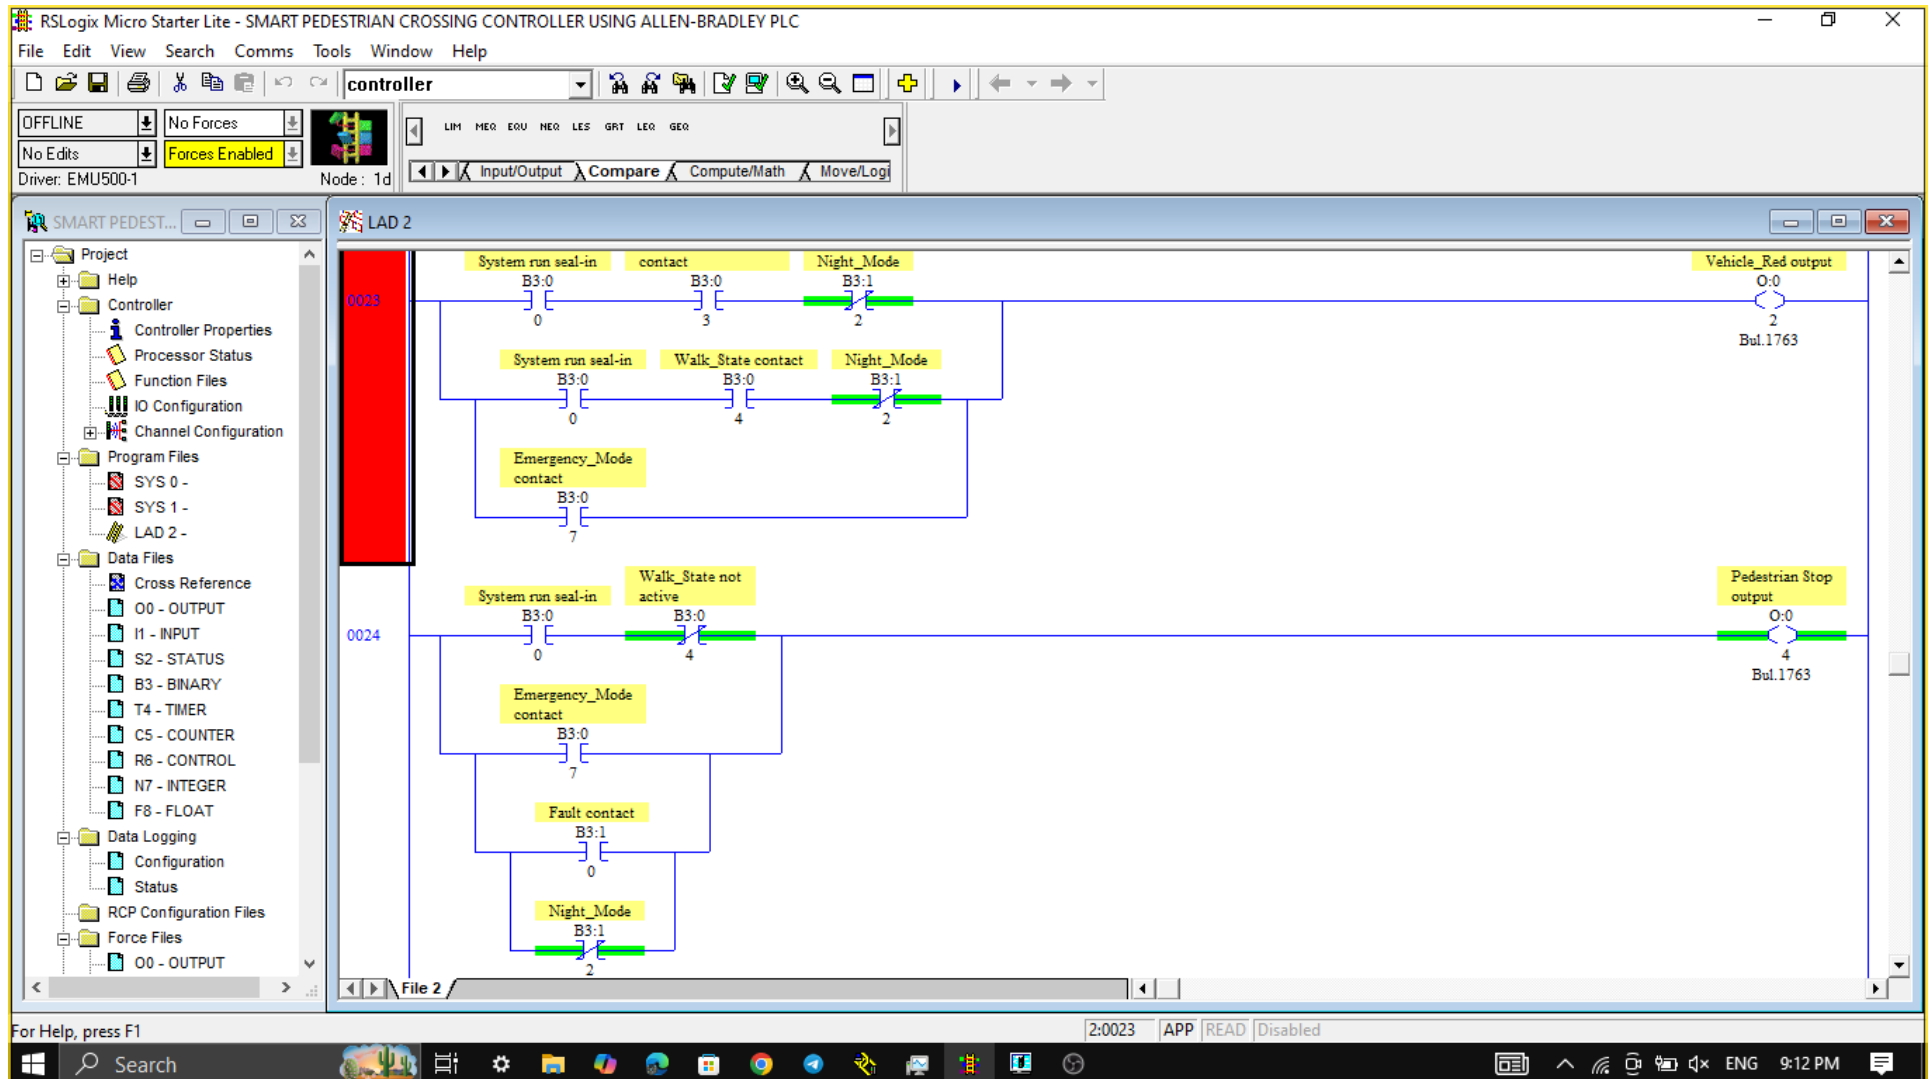


Figure 9: Vehicle red output and pedestrian stop output logic.

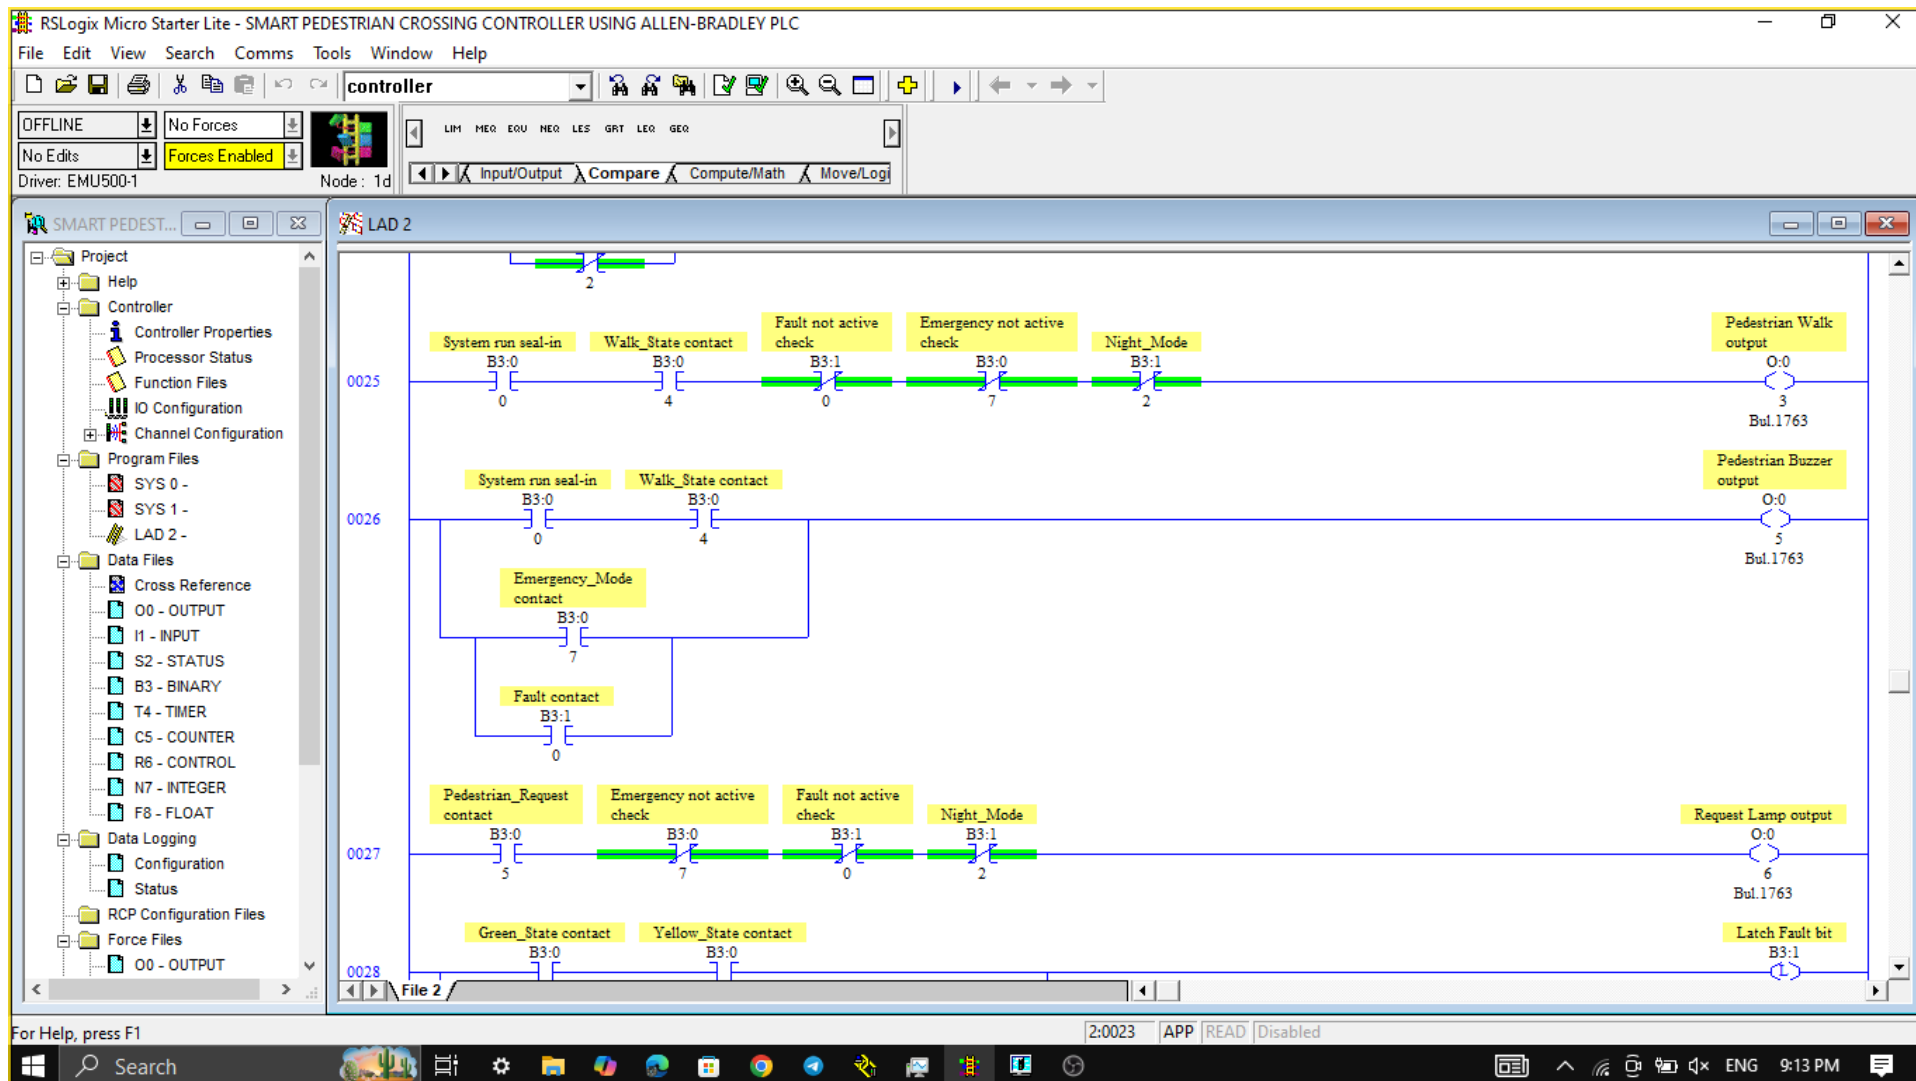


Figure 10: Pedestrian walk, buzzer, and request lamp output logic.

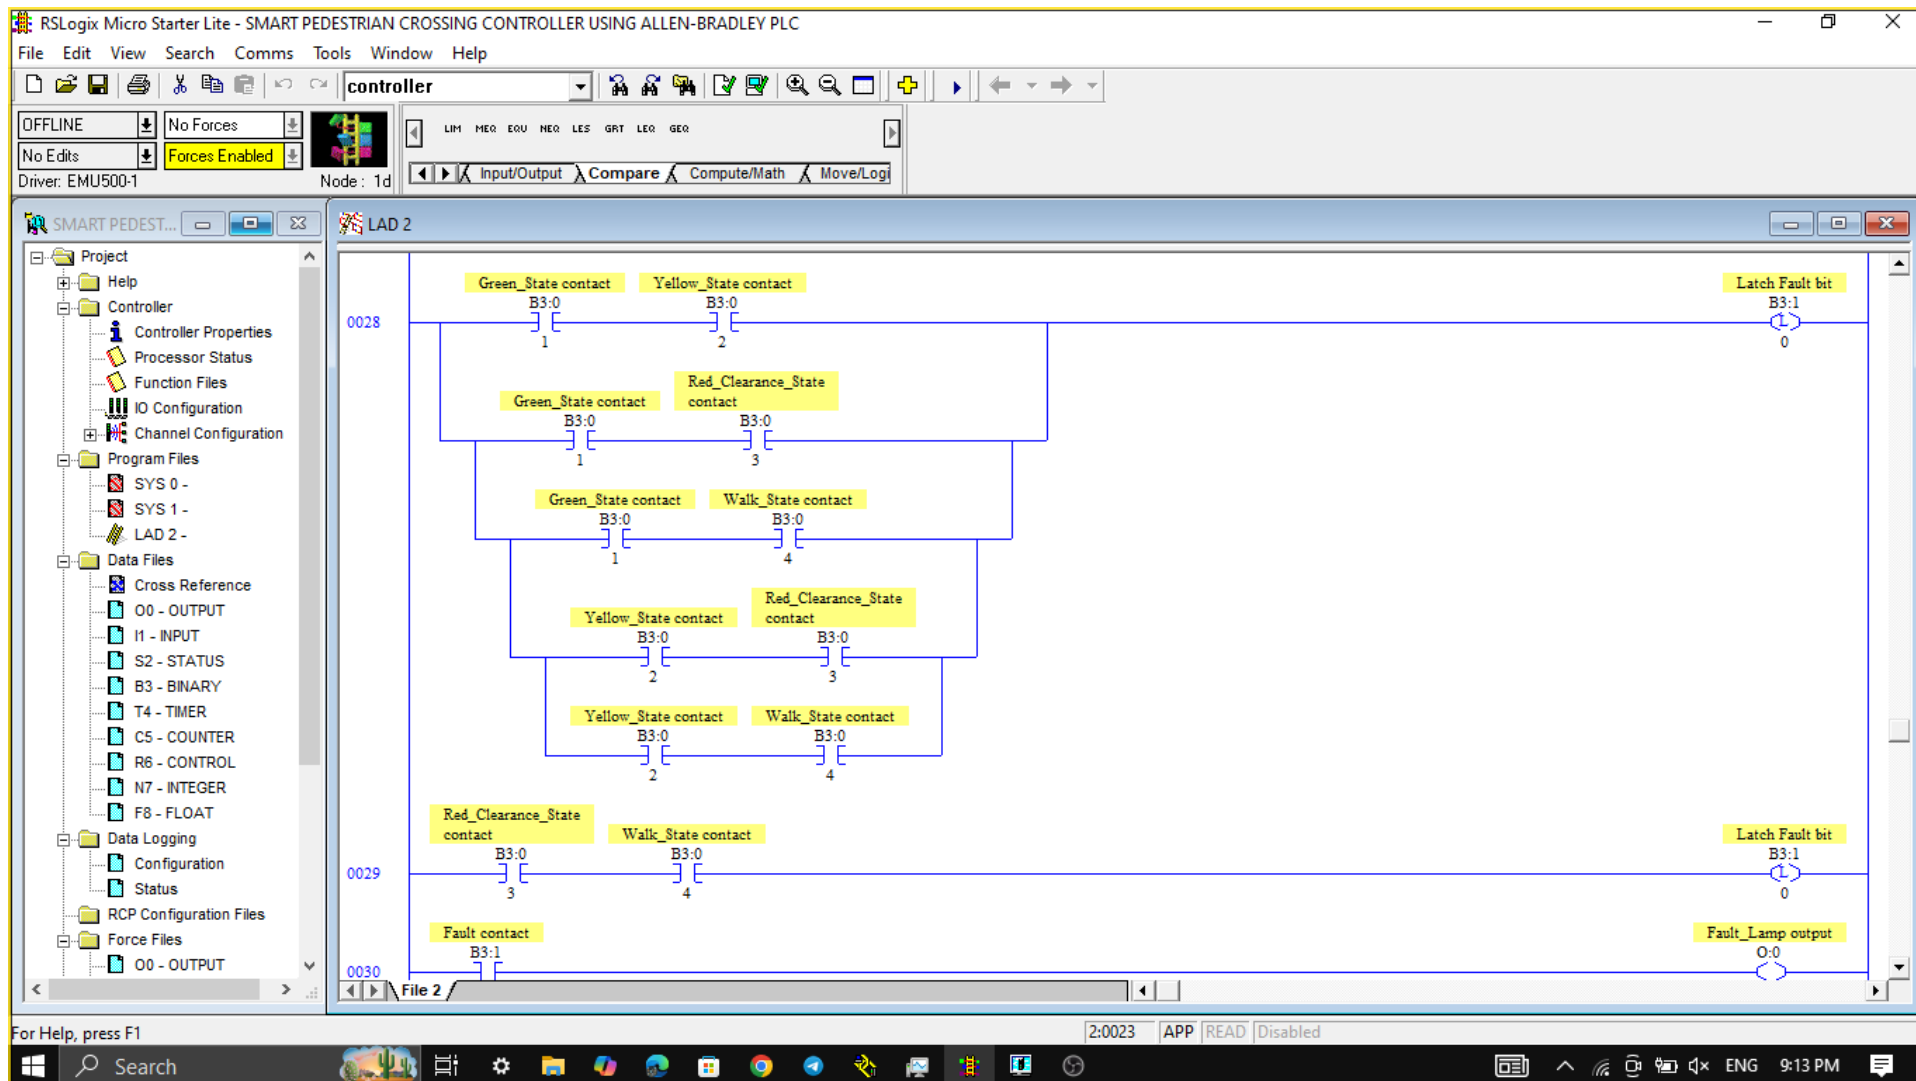


Figure 11: Fault detection logic and fault lamp output.

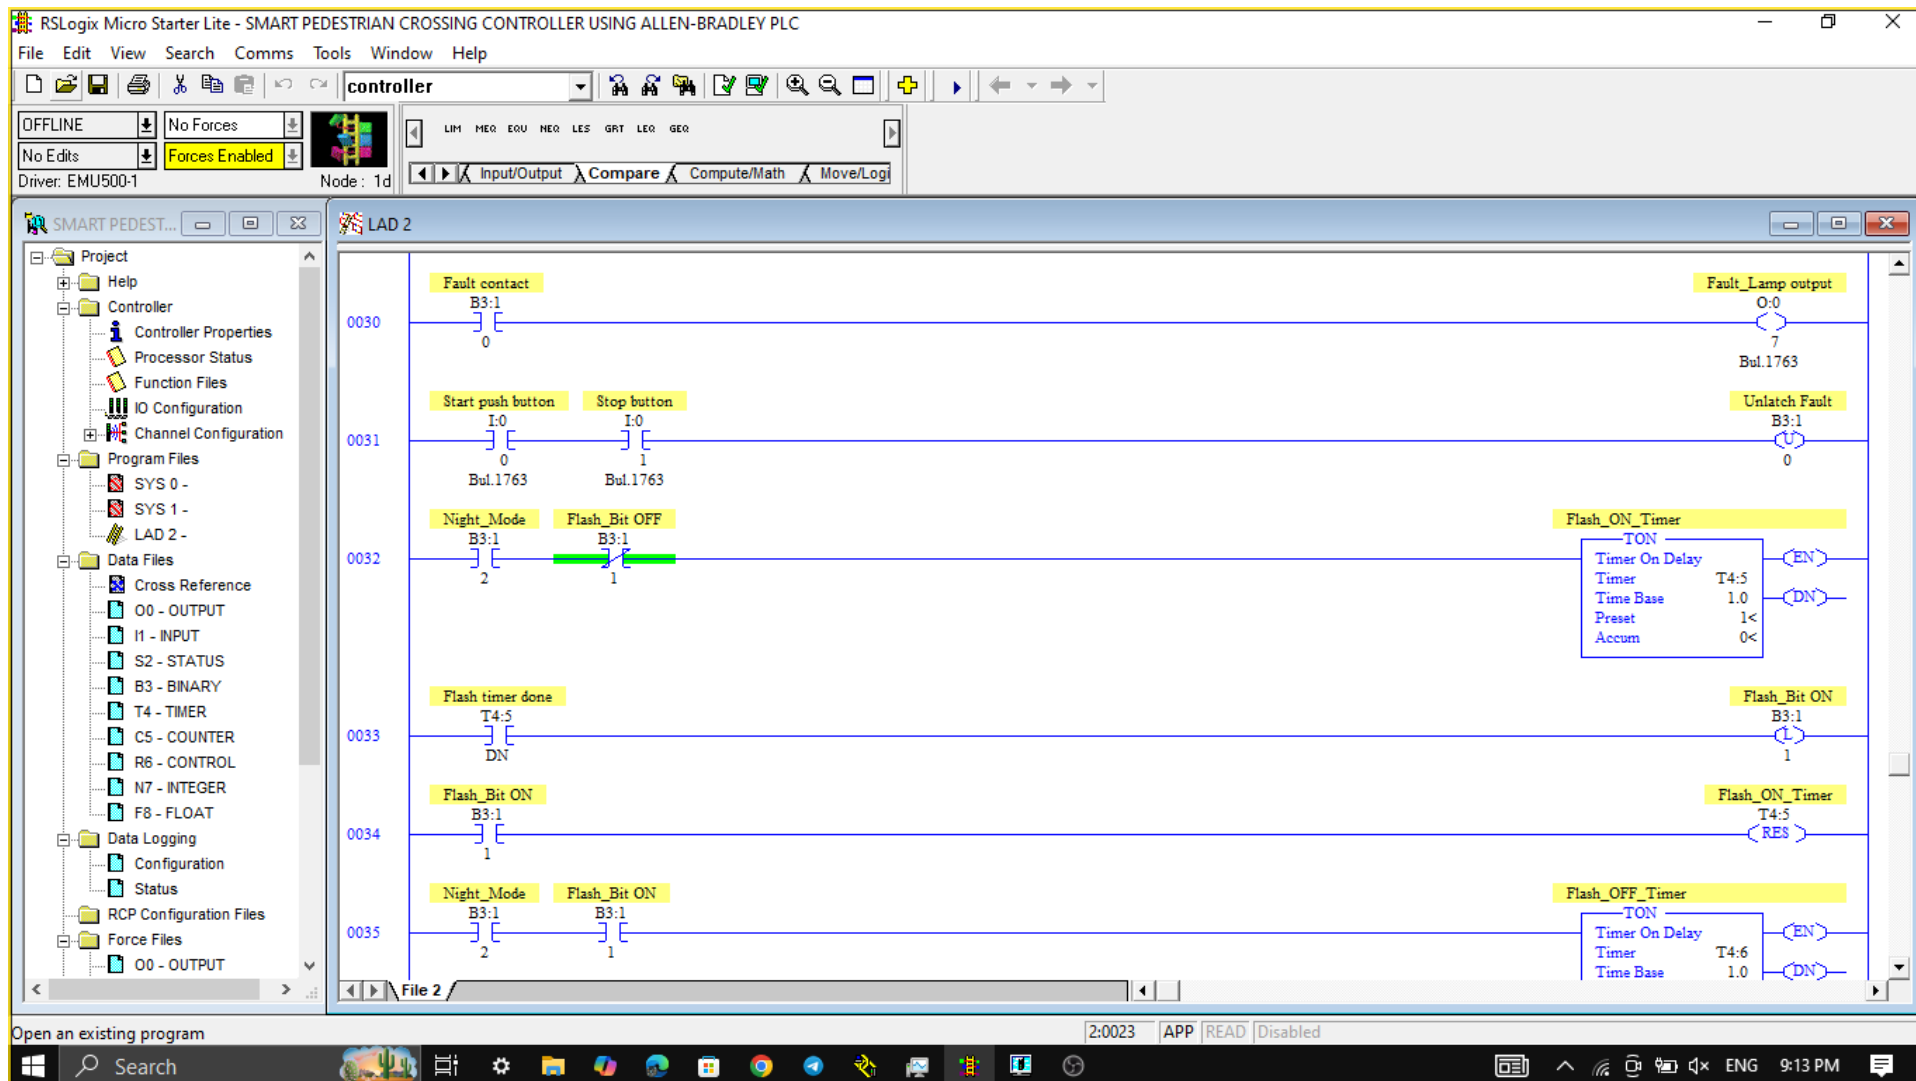


Figure 12: Flash ON timer and flash bit generation logic.

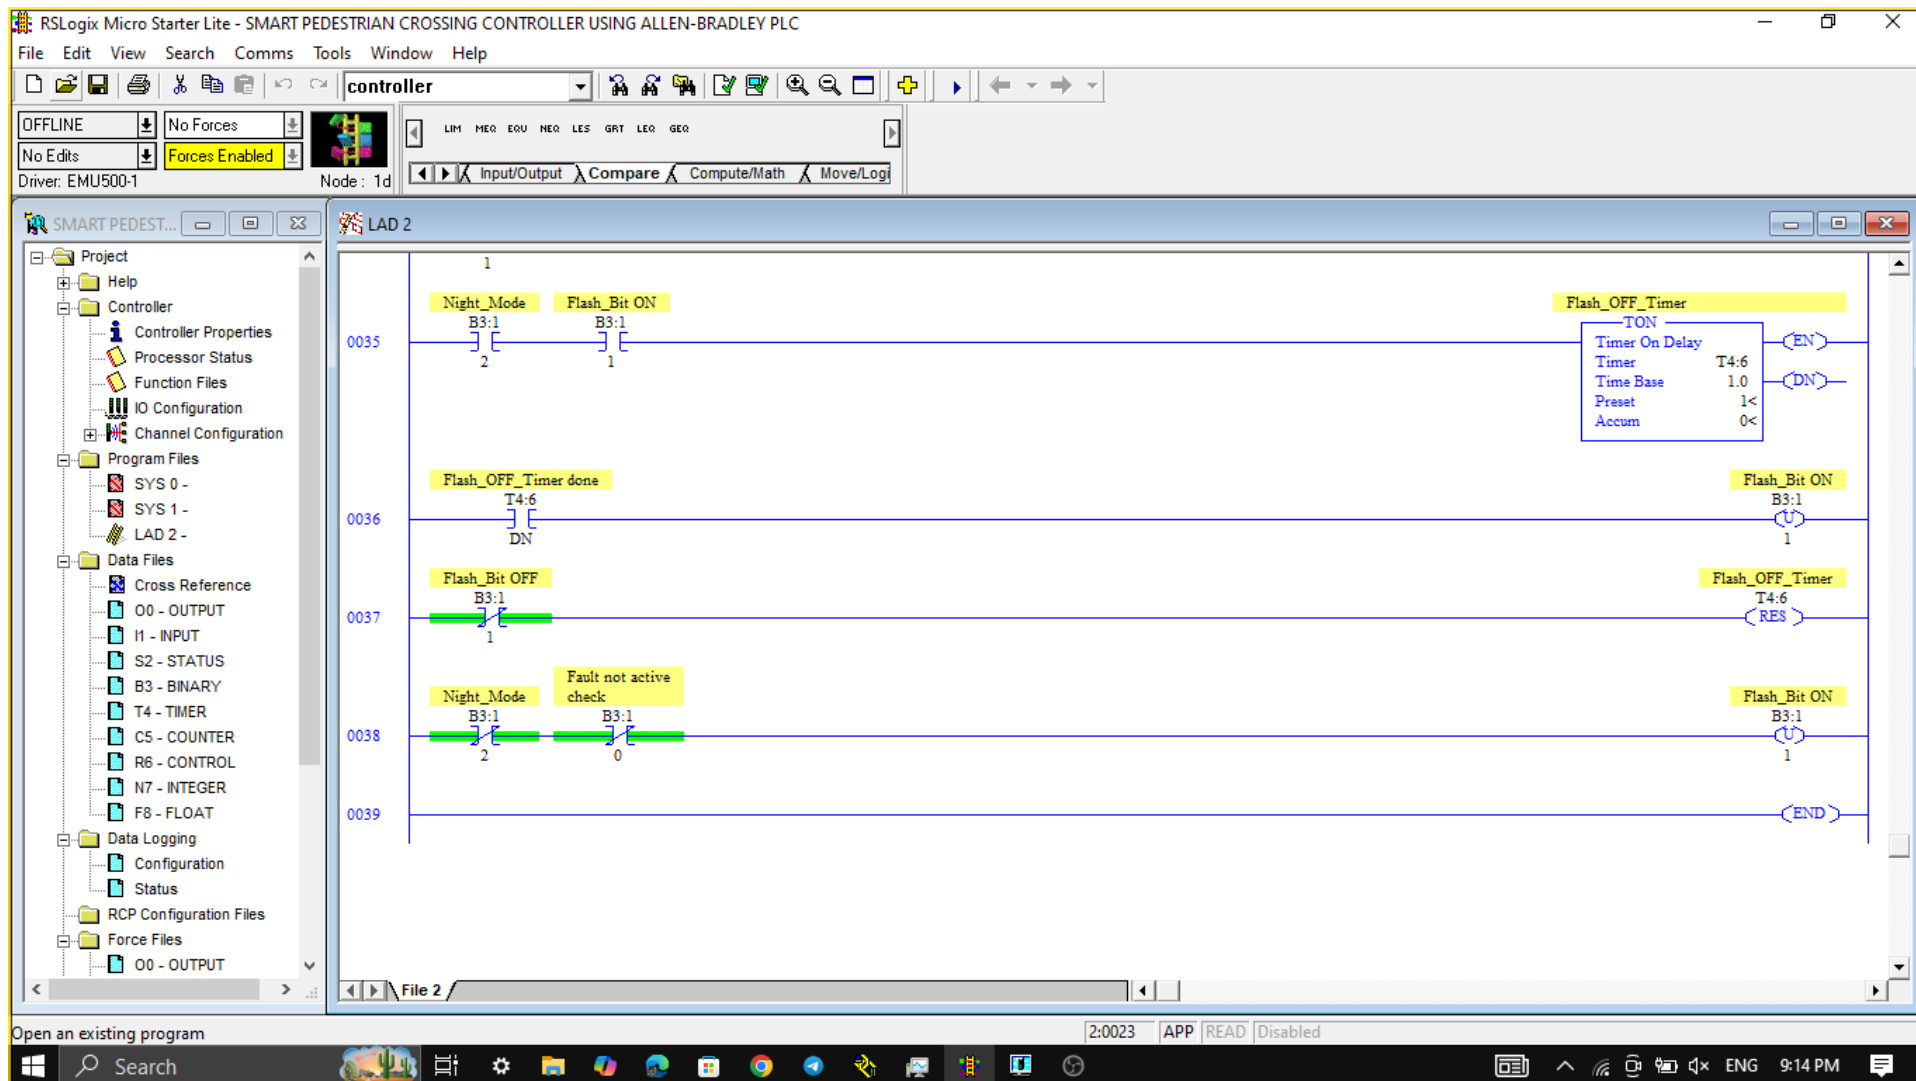


Figure 13: Flash OFF timer and end of ladder program.