


# POLYCAB MV MC CU IS 7098-2, 19/33 KV(E) Medium Voltage Multi Core Copper Armoured Cable, 19/33 KV (E) AC

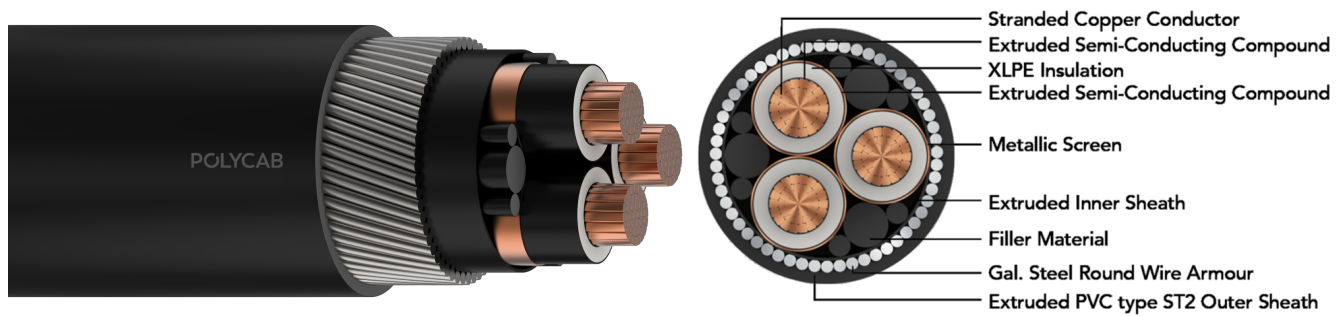

Images not to scale. Follow table for dimensions

## APPLICATION

POLYCAB MV 19/33 KV(E) XLPE insulated with copper conductor single core cable is suitable to use for power distribution for external and direct burial applications in power network system.

## CHARACTERISTICS

### Voltage Rating

Nominal Voltage: 19/33 KV (E)

### Operation Temperature

Max. operating temperature: 90°C

Max. Short Circuit Temperature: 250°C

### Bending Radius:

Fixed Installation: 15D

D is overall diameter of cable

## CONSTRUCTION

- Conductor: Circular Compacted Copper conductor as per IS 8130, class 2
- Conductor Screen: Extruded Semi-conductive compound
- Insulation: XLPE
- Non-Metallic Insulation Screen: Extruded Semi-conductive compound
- Metallic Insulation Screen: Copper tape screen
- Inner Sheath: Extruded Polyvinyl Chloride
- Armour: Galvanised steel Round/Flat Wire Armoured
- Outer Sheath: Extruded Polyvinyl Chloride

Colour: Black

### Test Voltage

63kV AC 50 Hz

### Impulse test Voltage

170 KV

## OUTSTANDING FEATURES

- Flame retardant
- High life
- UV resistant

## STANDARD FOLLOWS

IS 8130:2013

IS 5831:1984

IS 3975:1979

IS 7098-2:2011

## COMPLIANCE

- Conductor resistance IS 8130
- Insulation resistance IS 7098-2
- Flammability test IEC 60332-1-2
- Partial Discharge test IS 7098-2

## NOTES

- Inner sheath available with FR/ FRLS
- Outer/ Inner available with FR/FRLS

# POLYCAB MV MC CU IS 7098-2, 19/33 KV(E) Medium Voltage Multi Core Copper Armoured Cable,19/33 KV (E) AC

## DIMENSIONS AND WEIGHTS:

Product Code	No. of Cores	Core Cross sectional Area	Nominal Diameter			Weight (Approx.)
			Under armour	Over armour	Overall	
2XWY	No.	mm <sup>2</sup>	mm	mm	mm	Kg/Km
MVIS13CXSWY2003C035SA001S	3C	35	58.6	64.9	70.0	7790
MVIS13CXSWY2003C050SA001S	3C	50	62.0	68.3	73.6	8725
MVIS13CXSWY2003C070SA001S	3C	70	65.4	71.7	77.4	9836
MVIS13CXSWY2003C095SA001S	3C	95	69.3	75.6	81.6	11157
MVIS13CXSWY2003C120SA001S	3C	120	72.6	80.6	86.6	13573
MVIS13CXSWY2003C150SA001S	3C	150	76.4	84.4	90.4	14953
MVIS13CXSWY2003C185SA001S	3C	185	79.9	87.9	93.9	16484
MVIS13CXSWY2003C240SA001S	3C	240	85.3	93.3	99.3	18887
MVIS13CXSWY2003C300SA001S	3C	300	90.7	98.7	104.7	21622
MVIS13CXSWY2003C400SA001S	3C	400	97.6	105.6	111.6	25313
MVIS13CXSWY2003C500SA001S	3C	500	104.7	112.7	118.7	29561
MVIS13CXSWY2003C630SA001S	3C	630	112.0	120.0	126.0	34171

Product Code	No. of Cores	Core Cross sectional Area	Nominal Diameter			Weight (Approx.)
			Under armour	Over armour	Overall	
2XFY	No.	mm <sup>2</sup>	mm	mm	mm	Kg/Km
MVIS13CXSFY2003C035SA001S	3C	35	58.6	60.2	65.3	5076
MVIS13CXSFY2003C050SA001S	3C	50	62.0	63.6	68.6	5808
MVIS13CXSFY2003C070SA001S	3C	70	65.4	67.0	72.3	6724
MVIS13CXSFY2003C095SA001S	3C	95	69.3	70.9	76.5	7850
MVIS13CXSFY2003C120SA001S	3C	120	72.6	74.2	79.9	8878
MVIS13CXSFY2003C150SA001S	3C	150	76.4	78.0	84.0	10160
MVIS13CXSFY2003C185SA001S	3C	185	79.9	81.5	87.5	11451
MVIS13CXSFY2003C240SA001S	3C	240	85.3	86.9	92.9	13534
MVIS13CXSFY2003C300SA001S	3C	300	90.7	92.3	98.3	15870
MVIS13CXSFY2003C400SA001S	3C	400	97.6	99.2	105.2	19160
MVIS13CXSFY2003C500SA001S	3C	500	104.7	106.3	112.3	22929

# POLYCAB MV MC CU IS 7098-2, 19/33 KV(E) Medium Voltage Multi Core Copper Armoured Cable,19/33 KV (E) AC

Product Code	No. of Cores	Core Cross sectional Area	Nominal Diameter			Weight (Approx.)
			Under armour	Over armour	Overall	
2XFY	No.	mm <sup>2</sup>	mm	mm	mm	Kg/Km
MVIS13CXSFY2003C630SA001S	3C	630	112.0	113.6	119.6	27139

The above data is approximate & subject to manufacturing tolerance.

## ELECTRICAL CHARACTERISTICS:

No. of Cores	Core Cross sectional Area	Max. DC Resistance at 20°C	Max. AC Resistance at 90°C	Approx. Capacitance	Approx. Inductance		Approx. Reactance	
					mH/km		Ω/km	
No.	mm <sup>2</sup>	Ω/km	Ω/km	μF/km	2XFY	2XWY	2XFY	2XWY
3	35	0.524	0.672	0.11	0.45	0.45	0.142	0.142
3	50	0.387	0.496	0.13	0.42	0.42	0.131	0.131
3	70	0.268	0.344	0.14	0.40	0.40	0.125	0.125
3	95	0.193	0.248	0.15	0.38	0.38	0.119	0.119
3	120	0.153	0.197	0.17	0.36	0.36	0.114	0.114
3	150	0.124	0.159	0.18	0.35	0.35	0.110	0.110
3	185	0.0991	0.128	0.19	0.34	0.34	0.106	0.106
3	240	0.0754	0.098	0.21	0.32	0.32	0.102	0.102
3	300	0.0601	0.078	0.23	0.31	0.31	0.098	0.098
3	400	0.047	0.062	0.26	0.30	0.30	0.094	0.094
3	500	0.0366	0.049	0.28	0.29	0.29	0.091	0.091
3	630	0.0283	0.038	0.31	0.28	0.28	0.089	0.089

## CURRENT CARRYING CAPACITY:

Nominal area of conductor	Buried direct in ground	In a buried duct	In air
Sqmm	A	A	A
35	143	125	164
50	167	150	196
70	204	183	243
95	243	217	293

Document No.: 00118.Rev No.: 00 29-12-2023 / We reserve the rights to make technical changes.

# POLYCAB MV MC CU IS 7098-2, 19/33 KV(E) Medium Voltage Multi Core Copper Armoured Cable,19/33 KV (E) AC

Nominal area of conductor Sqmm	Buried direct in ground A	In a buried duct A	In air A
120	276	246	336
150	307	275	378
185	346	313	431
240	398	360	503
300	446	403	571
400	503	453	655
500	563	507	745

Air Ambient temperature: 40°C

Ground ambient temperature: 30°C

Conductor operating temperature: 90°C

The above table is in accordance with IS 3961(part 7):2016

## De-Rating Factor

### Rating factor for variation in ambient air temperature for cable in free air

Ambient air Temperature	25°C	30°C	35°C	40°C	45°C	50°C	55°C	60°C
De-Rating Factor	1.14	1.10	1.05	1.00	0.95	0.89	0.84	0.77

Maximum conductor temperature 90°C

### Rating factor for variation in ground temperature for direct buried cables.

Ground Temperature	15°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C
De-Rating Factor	1.12	1.08	1.04	1.00	0.96	0.91	0.87	0.82

Maximum conductor temperature 90°C

### Rating factor for variation in ground temperature for cable in duct.

Ground Temperature	15°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C
De-Rating Factor	1.12	1.08	1.04	1.00	0.96	0.91	0.87	0.82

Maximum conductor temperature 90°C