

panel mounting socket outlet, straight - flange


107x100 fixing centers 85x77

| Product description | |
|------------------------|--|
| Order number | 13100 |
| EAN/pcs | 4024941131001 |
| Product Group | GT panel mounting socket outlet straight |
| Amperage | 63A |
| Poles | 4p (3P+PE) |
| Earth 'Clock' Position | 6 h |
| Voltage | 380 up to 415V |
| Frequency | 50 and 60Hz |
| Protection | IP67 |
| Color code | red RAL 3000 |
| Connection Design | screw terminal as box terminal with Kontex-contact |
| Max. conductor | 25.0 mm² |



Further Information

| Material | |
|---------------------------|---|
| Material of Enclosure | Polyamide |
| Contact / Contact Carrier | contact carrier made of Polyamide, contacts are brass nickel plated |
| Weight/pcs | 0.490 kg |
| Packaging unit | 5 pcs |

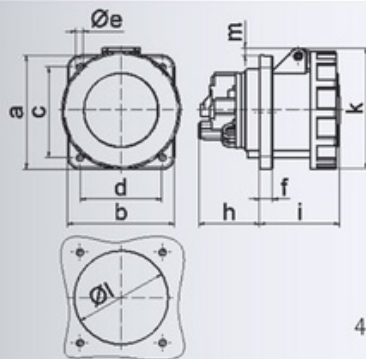

4 MB 50

| | | | |
|----------------------------|-------|-------|-------|
| Ampere | 63 | 63 | 63 |
| Polzahl | 3 | 4 | 5 |
| a | 107,0 | 107,0 | 107,0 |
| b | 100,0 | 100,0 | 100,0 |
| c | 85,0 | 85,0 | 85,0 |
| d | 77,0 | 77,0 | 77,0 |
| e \varnothing | 6,5 | 6,5 | 6,5 |
| f | 12,0 | 12,0 | 12,0 |
| h | 56,5 | 56,5 | 56,5 |
| i | 76,0 | 76,0 | 76,0 |
| k | 113,0 | 113,0 | 113,0 |
| l \varnothing | 88,0 | 88,0 | 88,0 |
| m | 7,0 | 7,0 | 7,0 |
| Leiter mm ² min | 6 | 6 | 6 |
| Leiter mm ² max | 25 | 25 | 25 |