


# switched, interlocked - housing dimensions 460x180

| Product description    |                                                       |
|------------------------|-------------------------------------------------------|
| Order number           | 16621                                                 |
| EAN/pcs                | 4024941166218                                         |
| Product Group          | GT wall mounting socket outlet, switched, interlocked |
| Amperage               | 125A                                                  |
| Poles                  | 4p (3P+PE)                                            |
| Earth 'Clock' Position | 6 h                                                   |
| Voltage                | 380 up to 415V                                        |
| Frequency              | 50 and 60Hz                                           |
| Protection             | IP67                                                  |
| Color code             | red RAL 3000                                          |
| Connection Design      | screw terminal as box terminal with Kontex-contact    |
| Max. conductor         | 70.0 mm²                                              |



| Further Information              |                                                                                                                            |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Cable entry                      | top entry M40 bottom entry M50/M40                                                                                         |
| Packaging                        | 460x180 mm (HxW)                                                                                                           |
| Additional technical information | The cable entry is one at top and two at bottom open<br>In 0-position lockable for 4 padlocks with bow diameter up to 7 mm |

| Material                  |                                                                                                                 |
|---------------------------|-----------------------------------------------------------------------------------------------------------------|
| Material of Enclosure     | Polycarbonate                                                                                                   |
| Contact / Contact Carrier | contact carrier made of high temperature resistant material, contacts and box terminals are brass nickel plated |
| Weight/pcs                | 3.635 kg                                                                                                        |
| Packaging unit            | 1 pcs                                                                                                           |

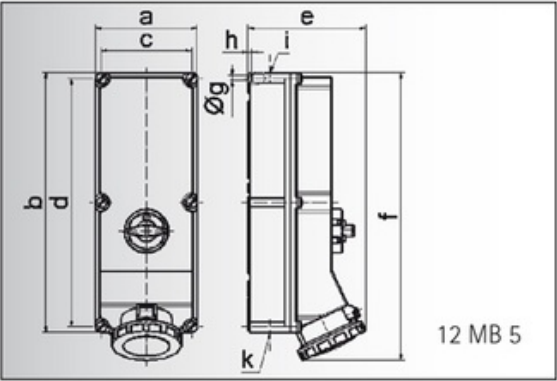

|         |         |         |         |
|---------|---------|---------|---------|
| Ampere  | 125     | 125     | 125     |
| Polzahl | 3       | 4       | 5       |
| a       | 180,0   | 180,0   | 180,0   |
| b       | 460,0   | 460,0   | 460,0   |
| c       | 160,0   | 160,0   | 160,0   |
| d       | 440,0   | 440,0   | 440,0   |
| e       | 208,0   | 208,0   | 208,0   |
| f       | 510,0   | 510,0   | 510,0   |
| g ø     | 8,3     | 8,3     | 8,3     |
| h       | 6,5     | 6,5     | 6,5     |
| i       | M40     | M 40    | M 40    |
| k       | M 40/50 | M 40/50 | M 40/50 |
|         |         |         |         |
|         |         |         |         |
|         |         |         |         |