


# wall mounting socket outlet - with external fixing

| Product description    |                                |
|------------------------|--------------------------------|
| Order number           | 11651                          |
| EAN/pcs                | 4024941116510                  |
| Product Group          | GT wall mounting socket outlet |
| Amperage               | 32A                            |
| Poles                  | 3p (2P+PE)                     |
| Earth 'Clock' Position | 6 h                            |
| Voltage                | 200 up to 250V                 |
| Frequency              | 50 and 60Hz                    |
| Protection             | IP44                           |
| Color code             | blue RAL 5015                  |
| Connection Design      | screw terminal                 |
| Max. conductor         | 10,0 mm²                       |



| Further Information              |   |
|----------------------------------|---|
| Cable entry                      | top entry M25   |
| Packaging                        | 92x94 mm (HxW)  |
| Additional technical information | The cable entry is one at top open and one at bottom closed |

| Material                  |   |
|---------------------------|---|
| Material of Enclosure     | Polyamide   |
| Contact / Contact Carrier | contact carrier made of polyamide, the contacts are brass |
| Weight/pcs                | 0.275 kg  |
| Packaging unit            | 10 pcs  |

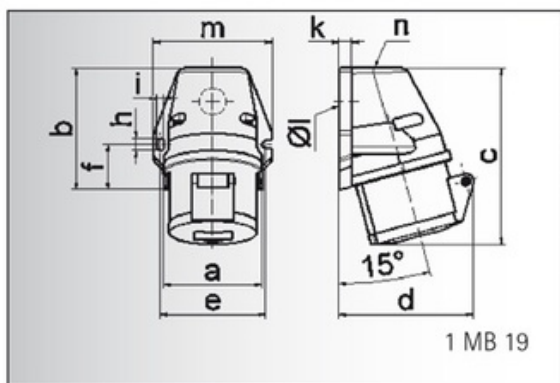

|                |       |       |       |       |       |       |
|----------------|-------|-------|-------|-------|-------|-------|
| Ampere         | 16    | 16    | 16    | 32    | 32    | 32    |
| Polzahl        | 3     | 4     | 5     | 3     | 4     | 5     |
| a              | 59,5  | 72,4  | 72,4  | 79,1  | 79,1  | 79,1  |
| b              | 90,0  | 90,0  | 90,0  | 92,0  | 92,0  | 92,0  |
| c              | 130,0 | 130,0 | 131,0 | 142,0 | 142,0 | 142,0 |
| d              | 85,0  | 96,0  | 98,0  | 103,0 | 103,0 | 106,0 |
| e              | 62,0  | 77,0  | 77,0  | 84,0  | 84,0  | 84,0  |
| f              | 33,5  | 33,5  | 33,5  | 30,0  | 30,0  | 30,0  |
| h              | 9,0   | 9,0   | 9,0   | 9,0   | 9,0   | 9,0   |
| i              | 5,5   | 5,5   | 5,5   | 5,5   | 5,5   | 5,5   |
| k              | 8,0   | 9,0   | 9,0   | 9,0   | 9,0   | 9,0   |
| l ø            | 21,0  | 21,0  | 21,0  | 21,0  | 21,0  | 21,0  |
| m              | 72,0  | 87,0  | 87,0  | 94,0  | 94,0  | 94,0  |
| n              | M 20  | M 25  | M 25  | M 25  | M 25  | M 25  |
| Leiter mm² min | 1,5   | 1,5   | 1,5   | 2,5   | 2,5   | 2,5   |
| Leiter mm² max | 4     | 4     | 4     | 10    | 10    | 10    |