


POLYCAB H05RR-F BS EN 50525-2-21 MC

Rubber Cable, 300/500 V AC

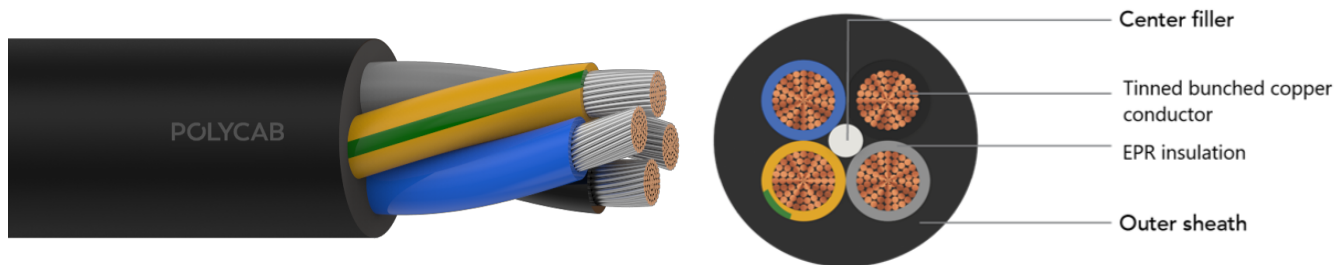

Images not to scale. Follow table for dimensions

APPLICATION

POLYCAB H05RR-F Multicore Flexible cable insulated and sheathed with cross-linked elastomeric compound. This cable fulfils the requirement as per EN 50525-2-21, cables are intended for a variety of applications where appliances or equipment, including heavy industrial equipment, require a flexible connection to the power supply.

CHARACTERISTICS

Voltage Rating
300/500 V

Operation Temperature
Fixed: -15°C to +60° C

CONSTRUCTION

- Annealed bunched tinned copper conductor as per IEC 60228, class 5
- Insulated with cross-linked elastomeric compound Type EI 4(EPR) to EN 50363-1.
- Sheathed with cross linked elastomeric compound Type EM 3 (EPR) to EN 50363-2-1

Core Identification

2 core Blue, Brown
3 core Green/Yellow, Blue, Brown
4 core Green/Yellow, Brown, Black, Grey

Bending Radius

Fixed installation – 8 x Overall diameter

Test Voltage

2000V AC at (20±5) °C

OUTSTANDING FEATURES

- Highly Flexible
- Oil Resistant
- Heat Resistant
- Long Life

STANDARD FOLLOWS

IEC 60228
BS EN 50363-1
BS EN 50363-2-1
BS EN 50525-2-21
IEC 60332-1-2

COMPLIANCE

Conductor Resistance test - IEC 60228
Insulation Resistance test - EN 50525-2-21
Test under fire condition - EN 60332-1-2
Flame retardant properties as per IEC-60332-1-2

OUR ACCREDITATIONS



APPROVAL



POLYCAB H05RR-F BS EN 50525-2-21 MC

Rubber Cable, 300/500 V AC

Weight & Dimension Data

Product Code	Construction mm ²	Stranding mm	Overall Diameter (Approx.) mm	Weight (Approx.) kg/km	POLYCAB/DOWEL Gland Size
RCBS04TRUARE002C.75S	2 x 0.75	24/0.2	6.23	59	DBW-01SS(UN)
RCBS04TRUARE002C001S	2 x 1	32/0.2	6.78	71	DBW-01SS(UN)
RCBS04TRUARE002C1.5S	2 x 1.5	30/0.25	8.32	106	DBW-01SS(UN)
RCBS04TRUARE002C2.5S	2 x 2.5	50/0.25	9.83	153	DBW-01SS(UN)
RCBS04TRUARE003C.75S	3 x 0.75	24/0.2	6.80	72	DBW-01SS(UN)
RCBS04TRUARE003C001S	3 x 1	32/0.2	7.18	84	DBW-01SS(UN)
RCBS04TRUARE003C1.5S	3 x 1.5	30/0.25	8.83	125	DBW-01SS(UN)
RCBS04TRUARE003C2.5S	3 x 2.5	50/0.25	10.44	184	DBW-01SS(UN)
RCBS04TRUARE004C.75S	4 x 0.75	16/0.2	6.91	72	DBW-01SS(UN)
RCBS04TRUARE004C001S	4 x 1	32/0.2	7.83	102	DBW-01SS(UN)
RCBS04TRUARE004C1.5S	4 x 1.5	30/0.25	9.65	153	DBW-01SS(UN)
RCBS04TRUARE004C2.5S	4 x 2.5	50/0.25	11.43	226	DBW-01SS(UN)

• DBW – Weather proof series

Electrical Characteristics

Current carrying capacity and max. DC conductor resistance.

Nominal cross sectional area mm ²	Current-carrying capacity		Max. DC conductor resistance at 20°C Ω/km
	Single-phase a.c.	Three-phase a.c.	
	Amp	Amp	
0.75	6	6	26.7
1	10	10	20
1.5	16	16	13.7
2.5	25	20	8.21

The ambient temperature is 30°C.

Conductor operating temperature 60°C.

The above table is in accordance with Table 4F3A of BS 7671:2018

De-Rating Factor

De-rating factor for 60°C thermosetting or thermoplastic insulated cable

Air Temperature	35°C	40°C	45°C	50°C	55°C
De-Rating Factor	0.91	0.82	0.71	0.58	0.41