


# Data sheet

Order number: 15160

GT wall mounting socket outlet, fused

Ampere	125A
Poles	5p (3p+N+PE)
Orientation	6 h
Voltage	200/346 up to 240/415V
Frequency	50 and 60Hz
Protection	IP67
Color Code	RAL 3000 red (Hinged Cover)
Connection Design	screw terminal as box terminal with Kontex-contact albaum
Contact carrier	made of high temperature resistant material, the contacts are brass nickel plated, the box terminals are brass high temperature /brass/nicke high temperature /brass/nicke high temperature /brass/nicke
Material of enclosure	housing material PC RAL 1013 PC RAL 1013

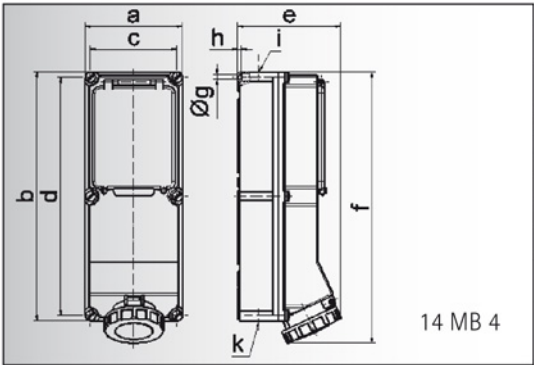

Ampere	63	63	63	125	125
Polzahl	3	4	5	4	5
a	180,0	180,0	180,0	180,0	180,0
b	460,0	460,0	460,0	460,0	460,0
c	160,0	160,0	160,0	160,0	160,0
d	440,0	440,0	440,0	440,0	440,0
e	191,0	191,0	191,0	210,0	210,0
f	500,0	500,0	500,0	512,0	512,0
g ø	8,3	8,3	8,3	8,3	8,3
h	6,5	6,5	6,5	6,5	6,5
i	M 40	M 40	M 40	M 40	M 40
k	M 32/40	M 32/40	M 32/40	M 40/50	M 40/50