

panel mounting socket outlet, straight - flange


120x120, fixing centers 100x100

| Product description | |
|------------------------|--|
| Order number | 13447 |
| EAN/pcs | 4024941134477 |
| Product Group | GT panel mounting socket outlet straight |
| Amperage | 125A |
| Poles | 4p (3P+PE) |
| Earth 'Clock' Position | 6 h |
| Voltage | 380 up to 415V |
| Frequency | 50 and 60Hz |
| Protection | IP67 |
| Color code | red RAL 3000 |
| Connection Design | screw terminal as box terminal with Kontex-contact |
| Max. conductor | 70.0 mm² |



Further Information

| Material | |
|---------------------------|---|
| Material of Enclosure | Polyamide |
| Contact / Contact Carrier | contact carrier made of high temperature resistant material, contacts and box terminals are brass nickel plated |
| Weight/pcs | 1.005 kg |
| Packaging unit | 5 pcs |

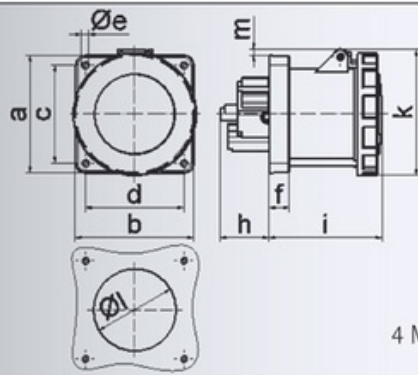

| | | | |
|----------------|-------|-------|-------|
| Ampere | 125 | 125 | 125 |
| Polzahl | 3 | 4 | 5 |
| a | 120,0 | 120,0 | 120,0 |
| b | 120,0 | 120,0 | 120,0 |
| c | 100,0 | 100,0 | 100,0 |
| d | 100,0 | 100,0 | 100,0 |
| e ø | 6,5 | 6,5 | 6,5 |
| f | 21,0 | 21,0 | 21,0 |
| h | 50,0 | 50,0 | 50,0 |
| i | 117,0 | 117,0 | 117,0 |
| k | 129,0 | 129,0 | 129,0 |
| l ø | 104,0 | 104,0 | 104,0 |
| m | 6,0 | 6,0 | 6,0 |
| Leiter mm² min | 25 | 25 | 25 |
| Leiter mm² max | 70 | 70 | 70 |