


POLYCAB H03Z1Z1-F BS EN 50525-3-11

Lighting & Appliances Cable, 300/300 V AC

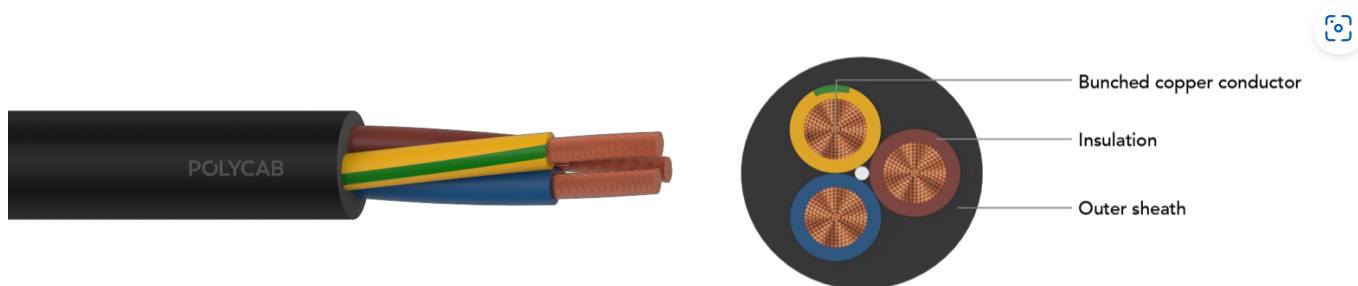

Images not to scale. Follow table for dimensions

APPLICATION

POLYCAB H03Z1Z1-F cable insulated and sheathed with halogen free thermoplastic compound and having low emission of smoke and corrosive gases when exposed to fire. This cable intended to use for connection of domestic appliances to the fixed supply

CHARACTERISTICS

Voltage Rating
300/300 V

Operation Temperature
Fixed: -15°C to +70° C

CONSTRUCTION

- Annealed bunched copper conductor as per IEC 60228, class 5
- Insulated with Halogen free thermoplastic Type TI 6 to EN 50363-7.
- Sheathed with Halogen free thermoplastic Type TM 7 to EN 50363-8

Core Identification

Two core Blue, Brown

Three core Green-Yellow, Blue, Brown

Four core Green-Yellow, Brown, Black, Grey

Bending Radius

Fixed installation – 8 x Overall diameter

Test Voltage

1500V AC at (20±5) °C

OUTSTANDING FEATURES

- Highly Flexible
- Good Insulation Resistance
- Halogen Free
- Low Smoke

STANDARD FOLLOWS

IEC 60228
BS EN 50363-7
BS EN 50363-8
BS EN 50525-3-11
IEC 60332-1-2

COMPLIANCE

Conductor Resistance test - IEC 60228
Insulation Resistance test - EN 50525-3-11
Test on sine vertical cable - EN 60332-1-2
Smoke Emission test - EN 61034-2
Flame Retardant according to IEC 60332-1-2.

OUR ACCREDITATIONS



APPROVAL



Weight & Dimension Data

Product Code	Construction n x mm ²	Stranding mm	Overall Diameter (Approx.) mm	Weight (Approx.) kg/km
LDBS05CLUALS002C.75S	2 x 0.75	0.2/16	6.23	39
LDBS05CLUALS002C001S	2 x 1	0.2/24	6.58	48
LDBS05CLUALS003C.75S	3 x 0.75	0.2/16	6.60	46
LDBS05CLUALS003C001S	3 x 1	0.2/24	6.98	57
LDBS05CLUALS004C.75S	4 x 0.75	0.2/16	7.21	56
LDBS05CLUALS004C001S	4 x 1	0.2/24	7.83	70

Electrical Characteristics

Current carrying capacity and max. DC conductor resistance.

Nominal Cross-sectional Area mm ²	Current carrying Capacity		Max. DC cond. resistance at 20°C Ω/km
	Single Phase a.c Amp	Three Phase a.c Amp	
0.75	6	6	26
1	10	10	19.5

The ambient temperature is 30°C.

Conductor operating temperature 60°C.

The above table is in accordance with Table 4F3A of BS 7671:2018

De-Rating Factor

De-rating factor for ambient temperature 60°C thermoplastic insulation.

Air Temperature	35°C	40°C	45°C	50°C	55°C
De-Rating Factor	0.91	0.82	0.71	0.58	0.41