## NOTES

1. 3S 21700 Li-ion, 9.0-12.6 V
2. U1 set to 5.0 V, U2 set to 3.3 V
3. BMS: over-charge / over-discharge / short-circuit protection
4. No on-board charging: cells are charged separately
5. F1: 5×20 mm glass fuse, 5 A

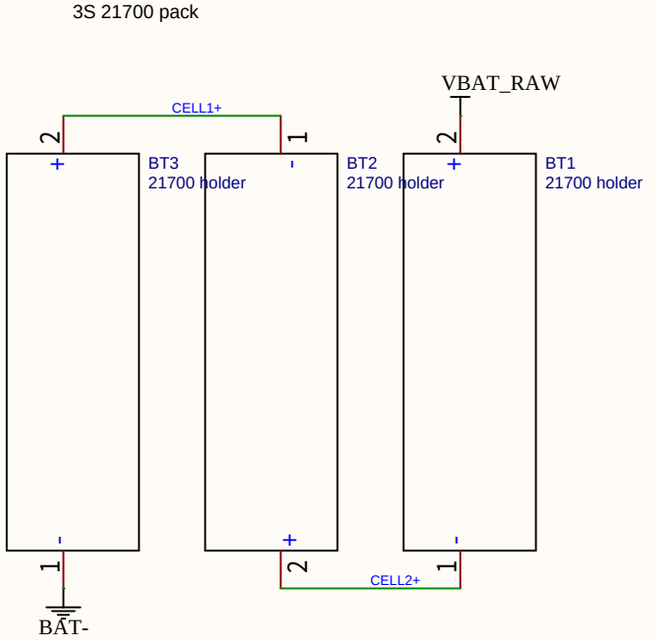




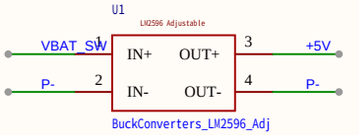


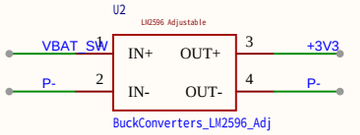


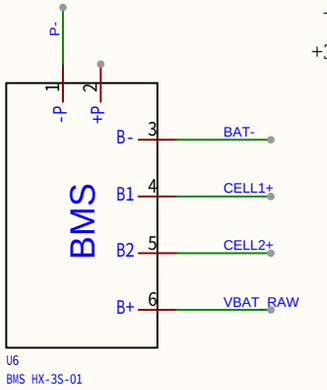





| | | |
|---|---|---|
| TITLE: OmniBattery v1 – 3S 21700 power board | | REV: B |
| EasyEDA | Company: Yazid Benmchich | Sheet: 1/1 |
| | Date: 2026-10-31 Drawn By: Yazid Benmchich | |