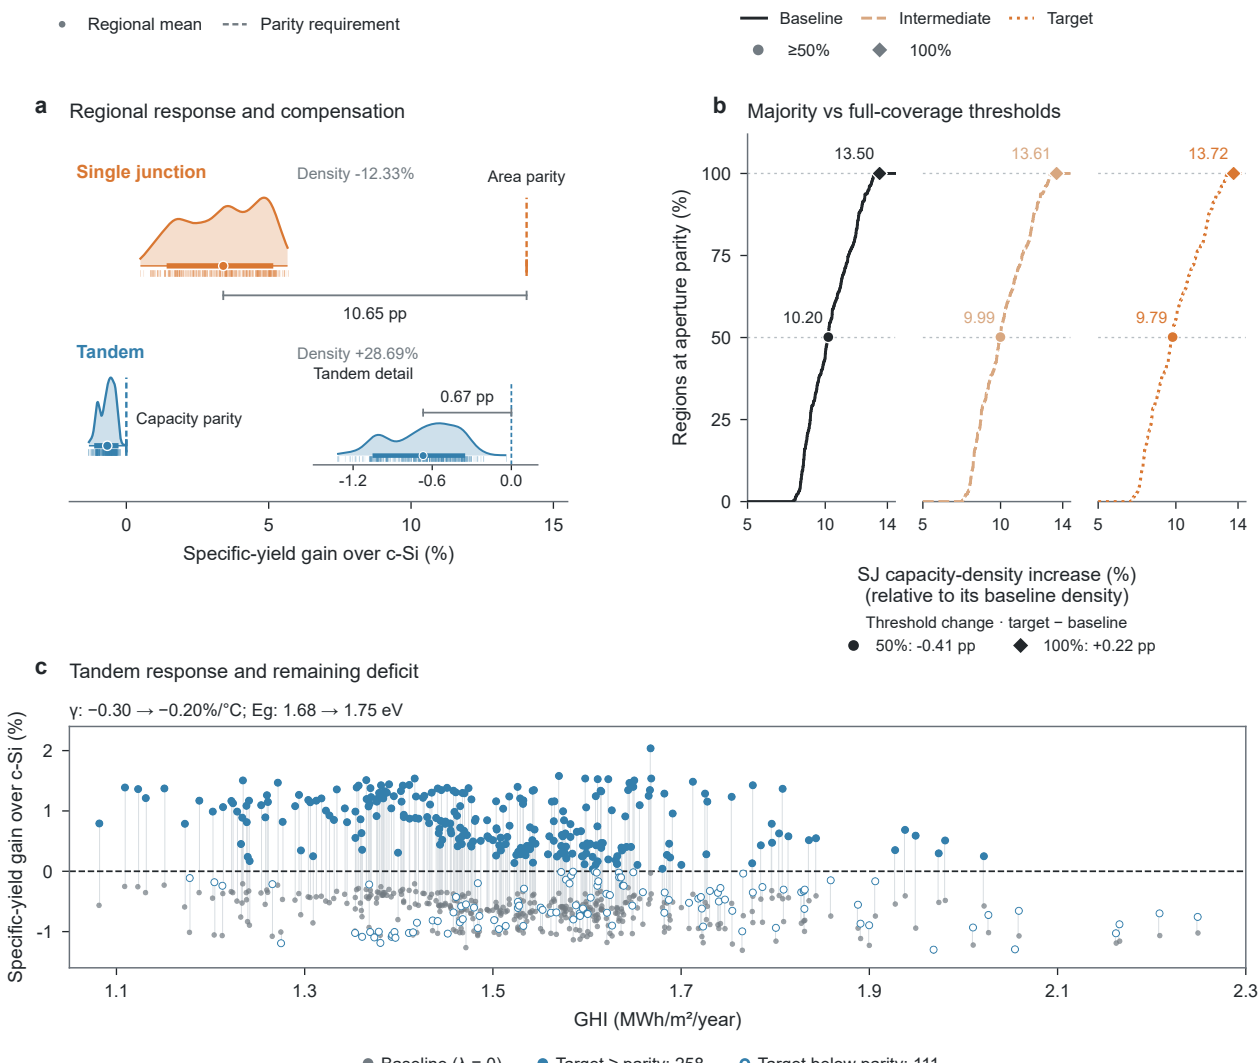

Regional mean
Parity requirement
Baseline
Intermediate
Target
≥50%
100%
a
Regional response and compensation
Single junction
Density -12.33%
Area parity
10.65 pp
Tandem
Density +28.69%
Tandem detail
0.67 pp
Capacity parity
-1.2
-0.6
0.0
0
5
10
15
Specific-yield gain over c-Si (%)
b
Majority vs full-coverage thresholds
Regions at aperture parity (%)
13.50
13.61
13.72
10.20
9.99
9.79
SJ capacity-density increase (%)
(relative to its baseline density)
Threshold change · target − baseline
50%: -0.41 pp
100%: +0.22 pp
c
Tandem response and remaining deficit
γ: −0.30 → −0.20%/°C; Eg: 1.68 → 1.75 eV
Specific-yield gain over c-Si (%)
GHI (MWh/m²/year)
Baseline (λ = 0)
Target ≥ parity: 258
Target below parity: 111