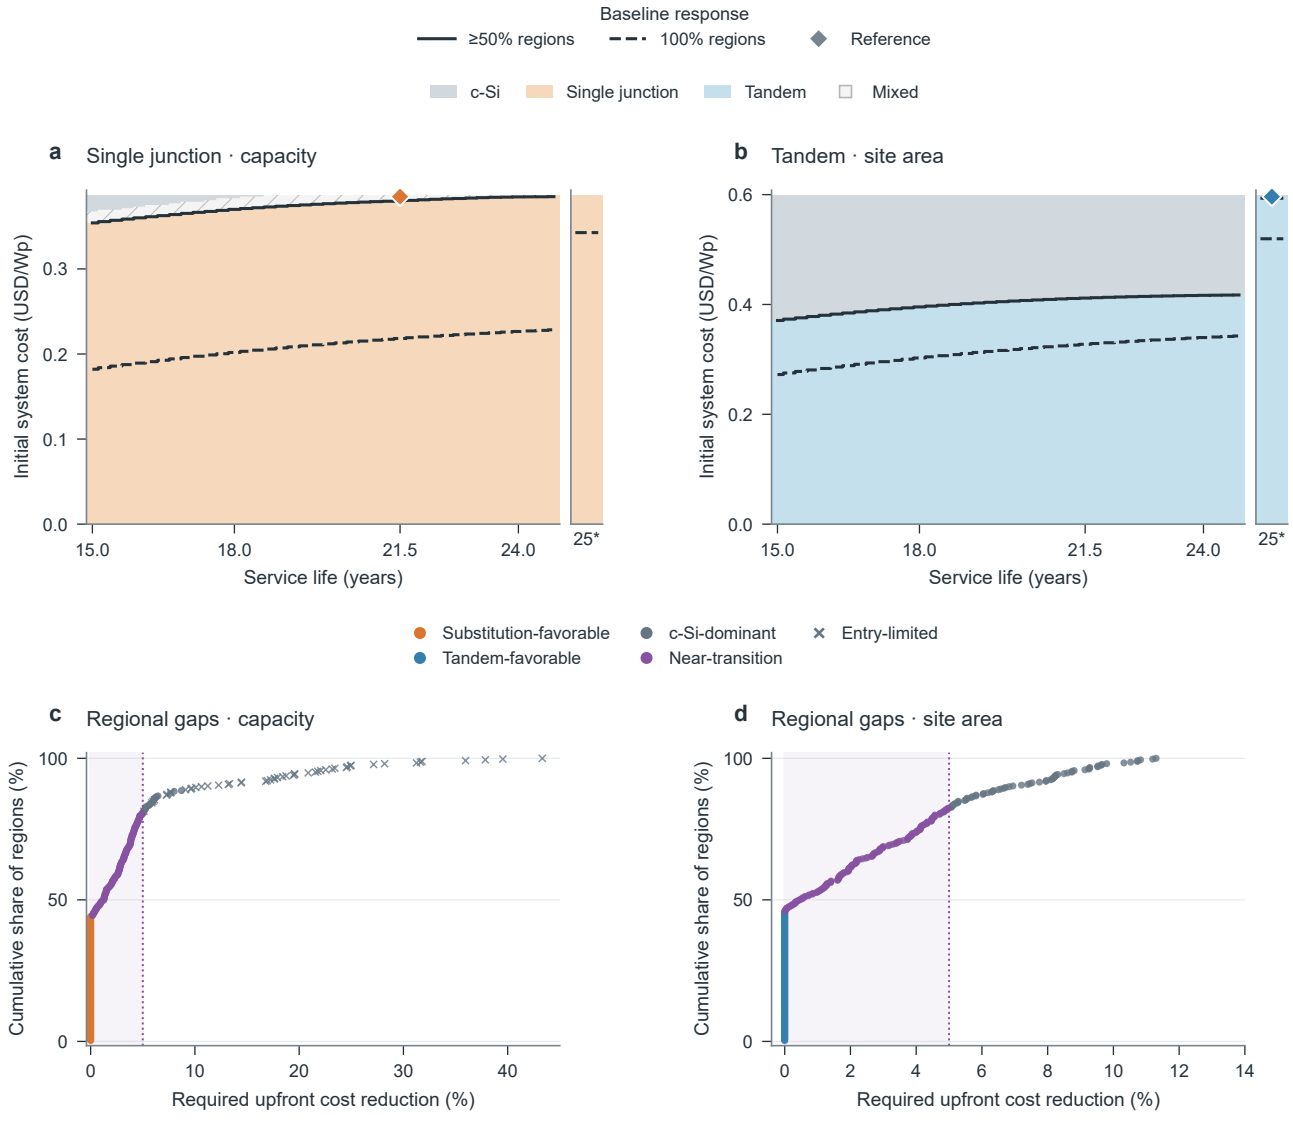

Baseline response
≥50% regions
100% regions
Reference
c-Si
Single junction
Tandem
Mixed
a
Single junction · capacity
Initial system cost (USD/Wp)
0.0
0.1
0.2
0.3
15.0
18.0
21.5
24.0
25*
Service life (years)
b
Tandem · site area
Initial system cost (USD/Wp)
0.0
0.2
0.4
0.6
15.0
18.0
21.5
24.0
25*
Service life (years)
Substitution-favorable
Tandem-favorable
c-Si-dominant
Near-transition
Entry-limited
c
Regional gaps · capacity
Cumulative share of regions (%)
0
50
100
0
10
20
30
40
Required upfront cost reduction (%)
d
Regional gaps · site area
Cumulative share of regions (%)
0
50
100
0
2
4
6
8
10
12
14
Required upfront cost reduction (%)