

Sales Kit for Industry – Process Automation

Product Marketing | SPSBU
2026



Industrial for Process Automation



Feature for Application


- Remote Monitoring with DC OK Relay
- Conformal Coating and Long-life Capacitors
- Wide Operating Temperature
- High Efficiency & Power Density



Benefit for Customer

- Minimizes Downtime via Real-time Monitoring
- Ensures Reliability in Harsh Environments
- Guarantees Stable Operation in Extreme Temperatures
- Lowers Operating Costs

Refinery Process Control System - DCS

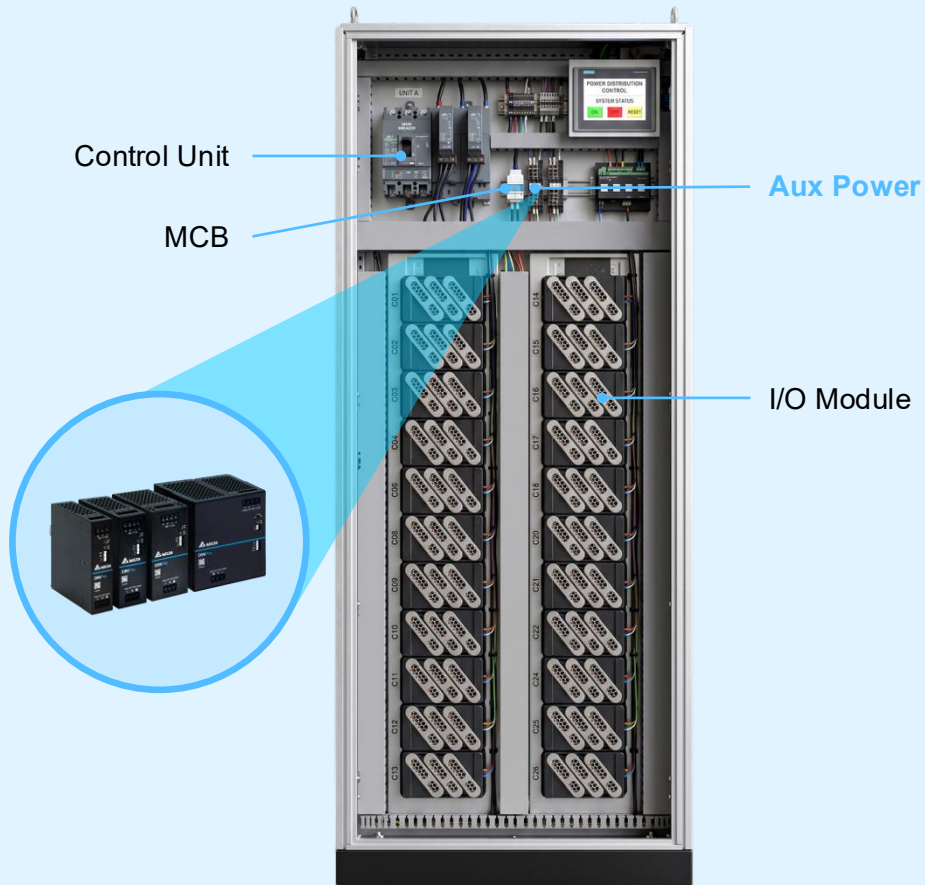

Key Features & Customer Benefits

- **Zero Downtime:** DC OK relay enables remote monitoring
- **Extreme Durability:** Coating & capacitors withstand corrosive environments
- **Climate Resilient:** Wide temp range guarantees operational stability
- **Cost Saving:** High efficiency lowers operating & cooling costs

Applicable Models



Din Pro 1φ

DRF-24V120W1PBA
DRF-24V240W1PBA
DRF-24V480W1PBA
DRF-24V960W1PBA

New



CliQII 3φ ATEX

DRP024V060W3BA
DRP024V120W3BA
DRP024V240W3BA
DRP024V480W3BA



CliQII 1φ ATEX

DRP024V060W1BA
DRP024V120W1BA
DRP024V240W1BA
DRP024V480W1BA



DIN Eco 3φ

DRL-24/48V120W3EN (3ENA)
DRL-24/48V240W3EN (3ENA)
DRL-24/48V480W3EN (3ENA)
DRL-24/48V960W3EN (3ENA)

New

Product Portfolio for Process Control System

Pro



CliQ II 1φ & 3φ ATEX

(50°C + ATEX + 150% Peak)

1φ - 24V (60W / 120W / 240W / 480W)

3φ - 24V (60W / 120W / 240W / 480W)



Din Pro 1φ

(60°C + 150% Peak + RC)

24V (120W / 240W / 480W / 960W)

New



Force-GT 1φ & 3φ

(up to 60°C + Long Life E-Cap)

1φ - 24V (120W / 240W / 480W)

3φ - 24V (120W / 240W / 480W / 960W)

Eco



Din Eco 3φ

(Cost Effective + Slim Width)

24V (120W / 240W / 480W / 960W)

New

DIN Rail Power Supply

DIN Pro

1- Phase

- DRF-12V/24V/48V120W1PBA
- DRF-12V/24V/48V240W1PBA
- DRF-24V/48V480W1PBA
- DRF-24V/48V960W1PBA



New
Launch

120W ~ 960W 1- Phase Input

Key Features

85~305V

Wide Range AC Operating
(305V for 60s)



DIN Pro
1- Phase Series

(120W- 960W)



150% 5sec.
500% 5ms.

Power Boost Capability



Extreme Temperature


- 40°C to
+80°C

Operating Range



PCBA


Conformal Coating
Available




Current Sharing for
Parallel Application (960W 3+1)



EMS Immunity
(IEC 61000-4-6, 20Vrms)



Compliance with
SEMI F47

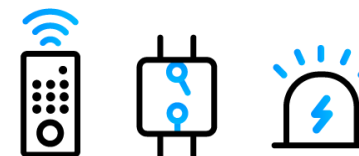

Remote Control, DC OK Relay &
LED Indicator

DIN Rail Power Supply

DIN Eco 3-Phase Series

- DRL-24V/48V120W3EN
- DRL-24V/48V240W3EN
- DRL-24V/48V480W3EN
- DRL-24V/48V960W3EN




New
Launch

120W ~ 960W 3-Phase AC Input

Key Features

340~575V

3 Phase AC input Operating
(3ENA input up to 600V)




95%

Ultra-High Efficiency




DIN Eco
3-Phase Series

(120W- 960W)




**Wide Operating
Ambient
Temperature**




4KV/2KV

**Surge Protection
Capacity**



**DC OK relay (>480W)
and LED Indicator**



Slim & Compact




**Meet Global Certified
IEC/EN/UL
62368-1 / 61010-1**

DeltaPSU Website and Social Media

Our responsive homepage adapts to desktop PCs and mobile devices.

Simply visit psu.deltaww.com for all your product needs.

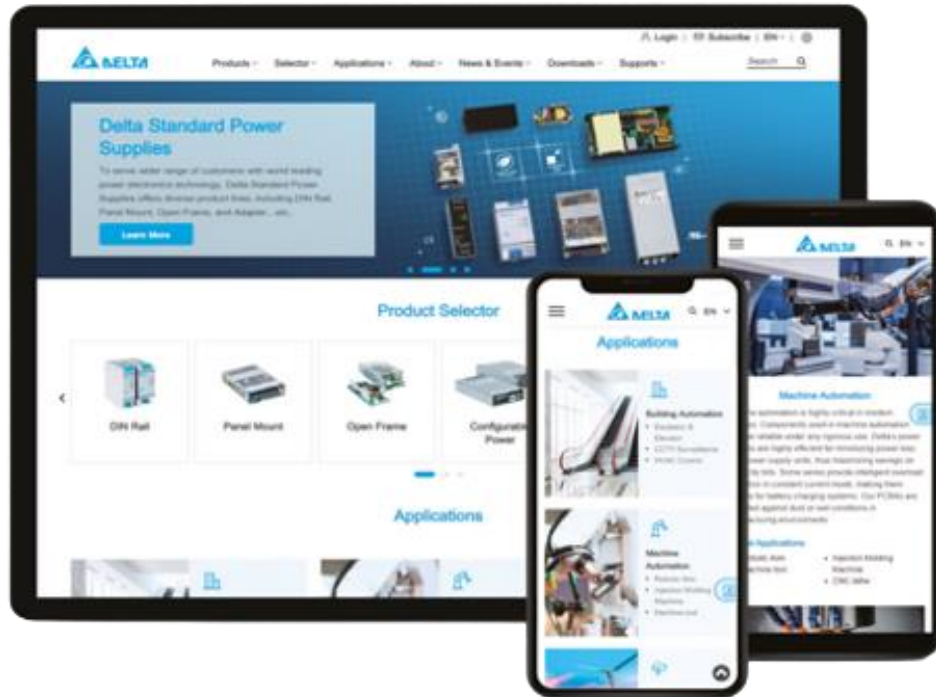

For more information, find us at :



LinkedIn

www.linkedin.com/company/deltapsu



YouTube

www.youtube.com/DeltaPowerSupplies



Facebook

www.facebook.com/DeltaPSU



WeChat

台达标准电源



Thanks.

Smarter. Greener. Together.

