


Sales Kit for Industry – Data Center CDU

Product Marketing | SPSBU
2026



Industrial for Data Center CDU

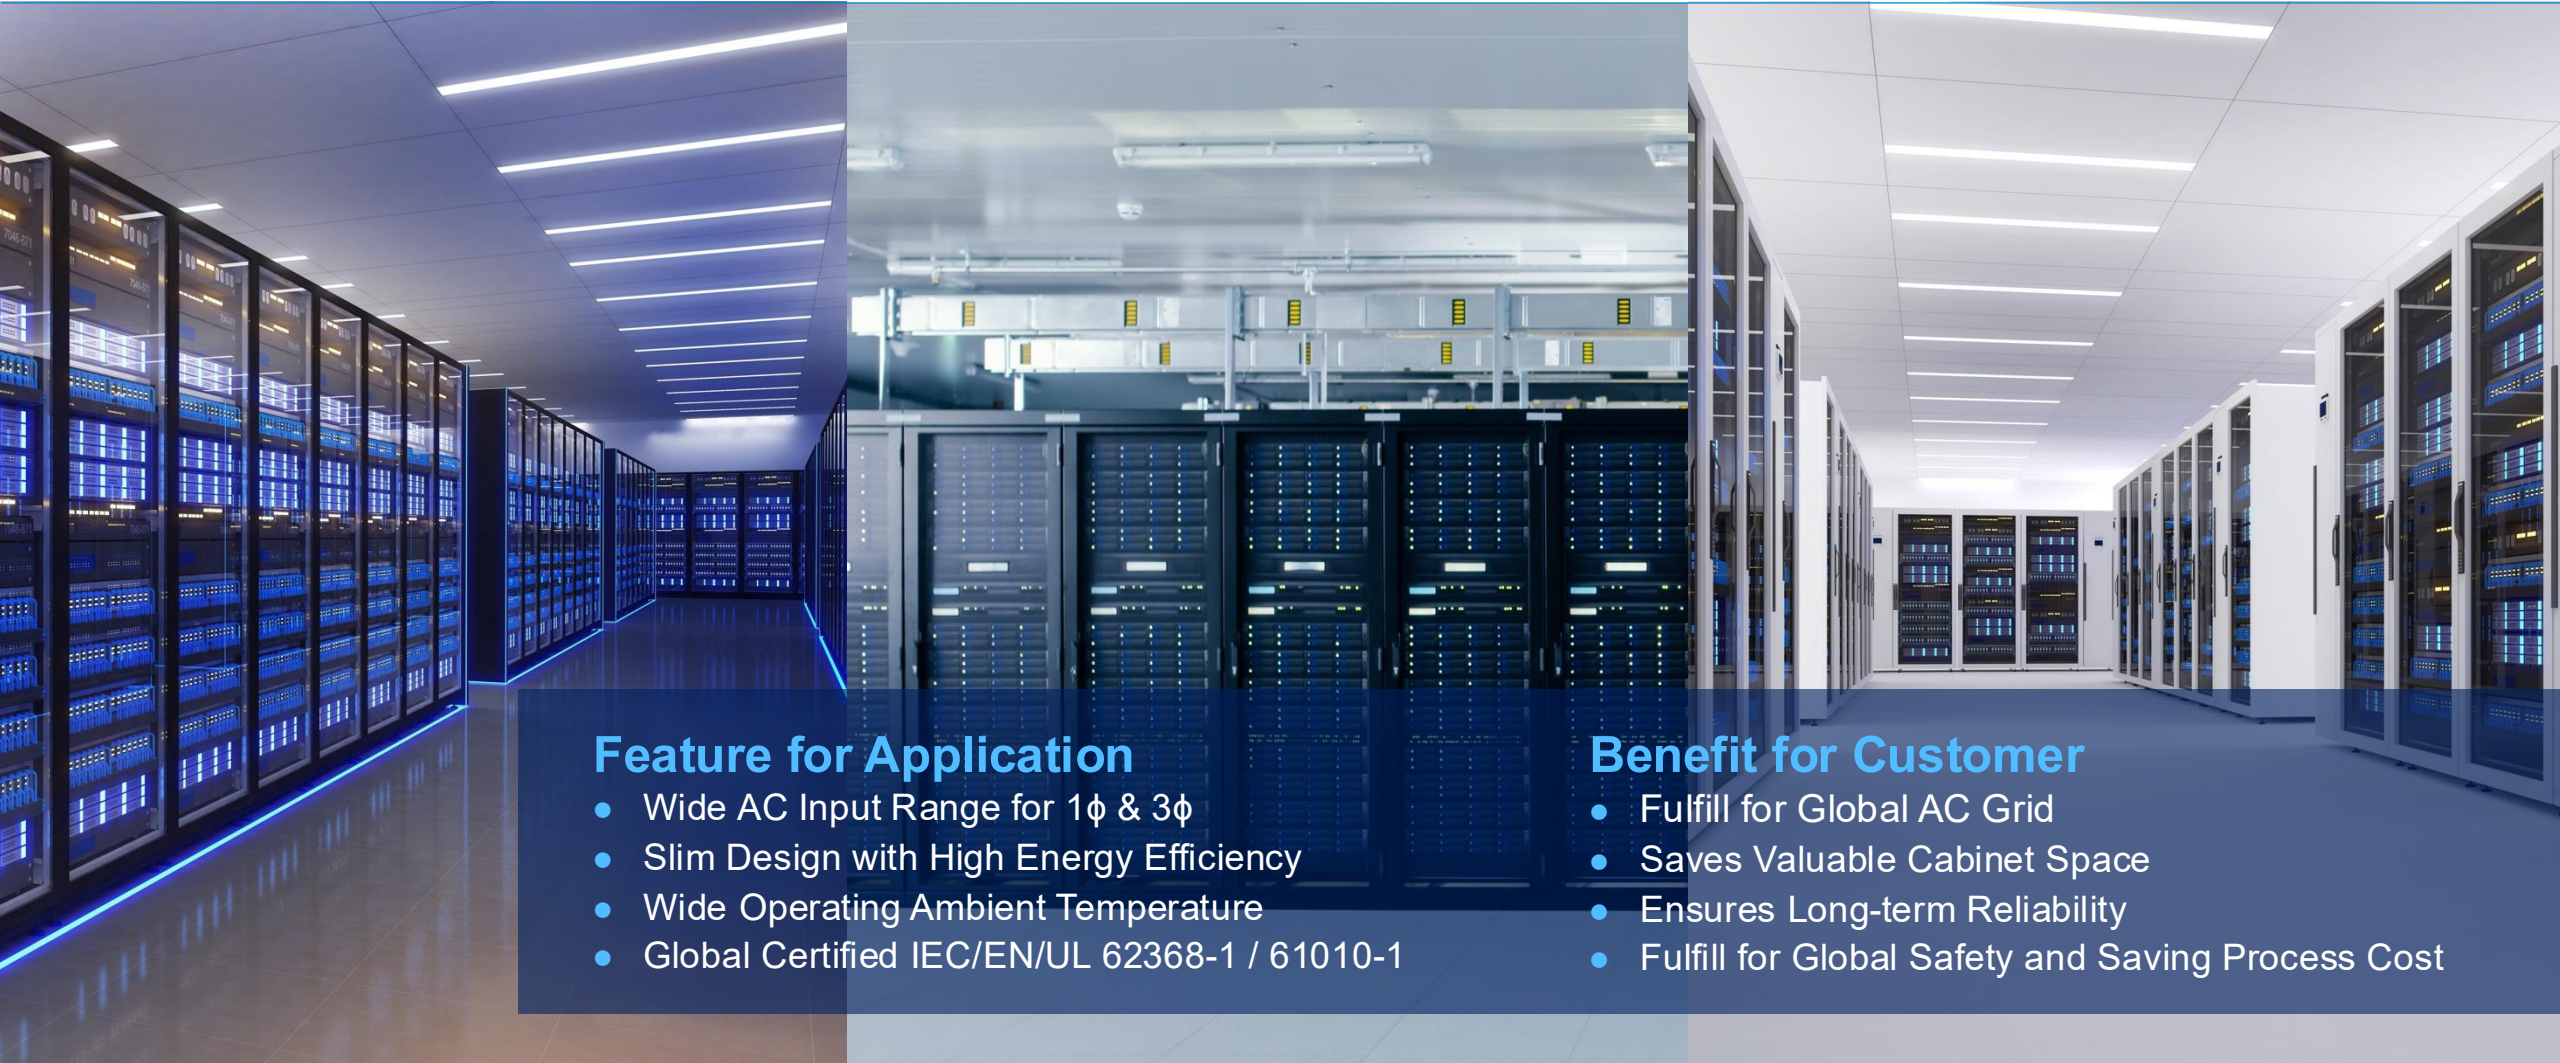

Feature for Application

- Wide AC Input Range for 1 ϕ & 3 ϕ
- Slim Design with High Energy Efficiency
- Wide Operating Ambient Temperature
- Global Certified IEC/EN/UL 62368-1 / 61010-1

Benefit for Customer

- Fulfill for Global AC Grid
- Saves Valuable Cabinet Space
- Ensures Long-term Reliability
- Fulfill for Global Safety and Saving Process Cost

Thermal Management: Applications and Technologies




Traditional Industrial equipment



Semiconductor Equipment




Energy Storage System

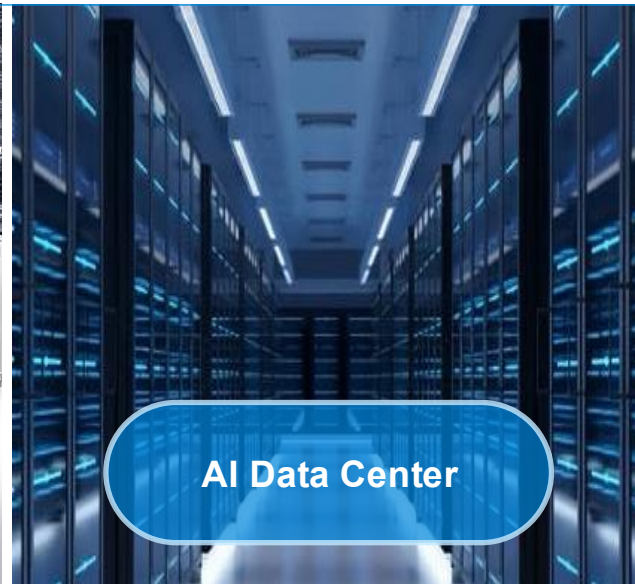

AI Data Center

TEC	 AIR		 Liquid		 Immersion	
	General	Advance	Air to Liquid	Liquid to Liquid		Immersion
Cooling Efficiency	CRAC / CRAH	3DVC	AALC / RDHx	In-Rack CDU	In-Row CDU	Single Phase
Application	General Industrial	Semiconductor equipment	ESS 、 AI training 、 Big Data			Two Phase
	480W	850W	12kW	12kW	15kW	15kW
						>15kW
						AI Data Center

Data Center – CDU In Row

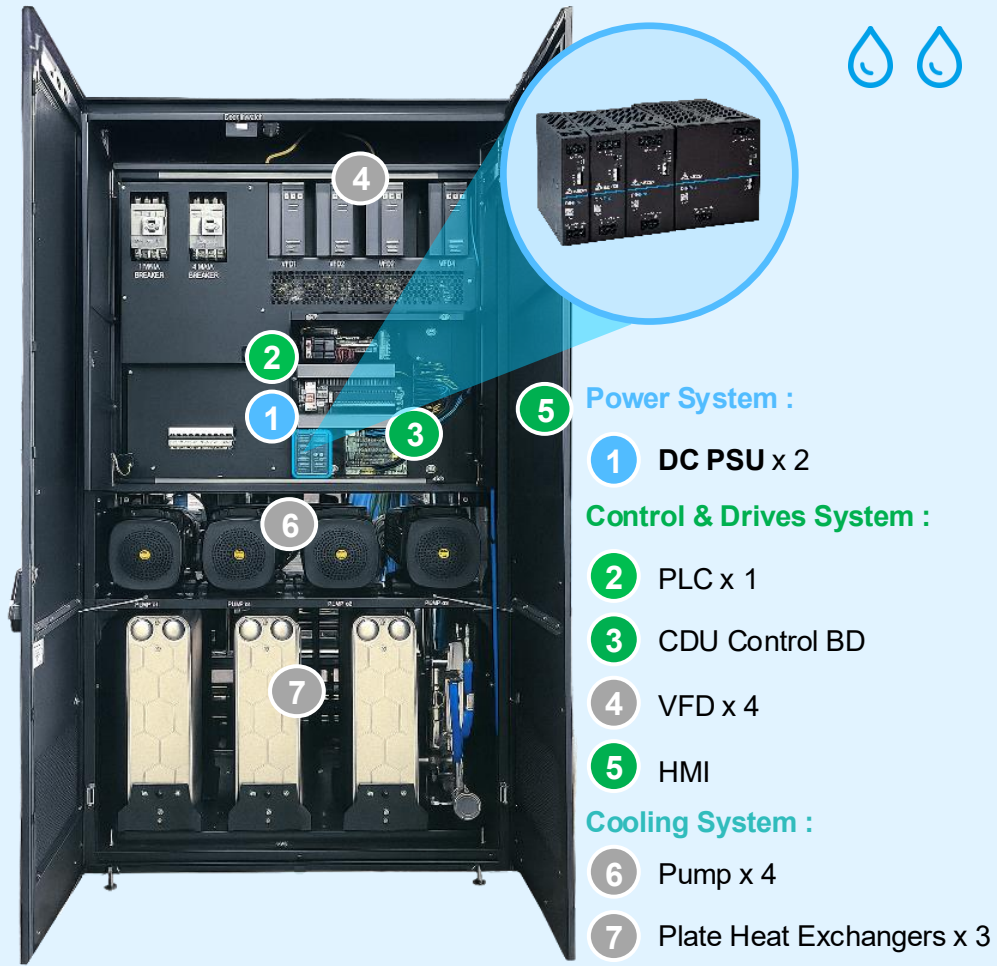

Key Features & Customer Benefits

- **Wide Operating Temperature (-40~80°C):** ensures long-term reliability
- **Slim Design with High Efficiency:** saves valuable cabinet space
- **Long Lifetime (5-year warranty):** guarantees durability and saves maintenance costs
- **Smart Monitoring (DC OK relay):** enables remote status checks to minimize downtime

Applicable Models



Force GT 3φ

DRF-24V120W3GBA
DRF-24V240W3GBA
DRF-24V480W3GBA
DRF-24V960W3GBA




DIN Eco 3φ

DRL-24V120W3EN
DRL-24V240W3EN
DRL-24V480W3EN
DRL-24V960W3EN

New

Data Center – CDU In Rack

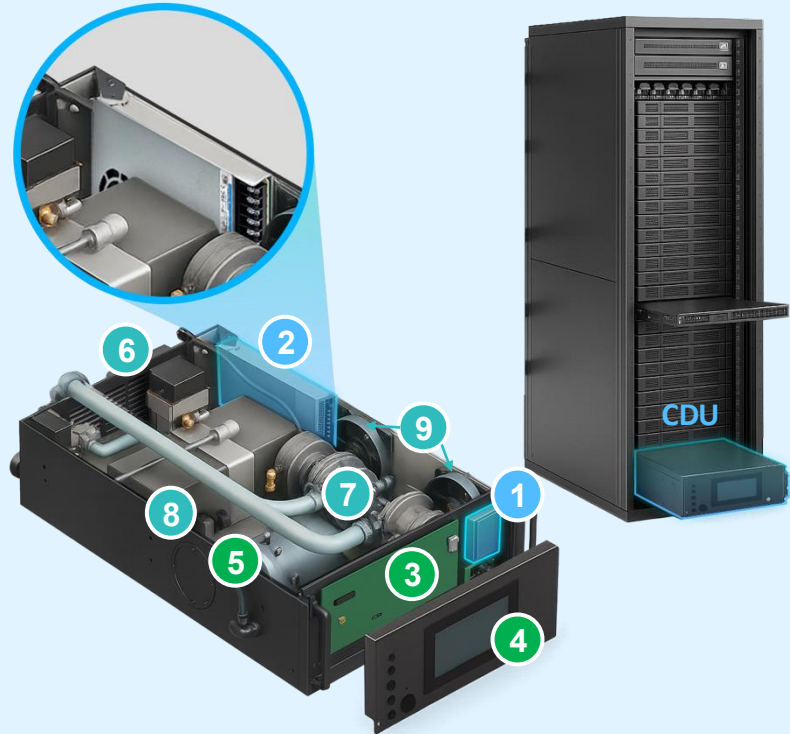

Key Features & Customer Benefits

- **Wide Operating Temperature (-40~80°C):** ensures long-term reliability
- **Power Boost (150% Peak Power):** handles pump startup loads without oversizing
- **Long Lifetime (5-year Warranty):** guarantees durability and saves maintenance costs
- **Smart Monitoring (DC OK Relay):** enables remote status checks to minimize downtime

Applicable Models



Din Pro 1φ

New

DRF-24V/48V120W1PBA
DRF-24V/48V240W1PBA
DRF-24V/48V480W1PBA
DRF-24V/48V960W1PBA



PMR SMART (PMS)

PMS-24V/48V750W1BTD
PMS-24V/48V1K2W1BTD
PMS-24V/48V2K5W1BTD



PMR

PMR-24V/48V150W1AT
PMR-24V/48V240W1AT
PMR-24V/48V320W1AT
PMR-24V/48V600W1BT
PMR-24V/48V1K01BT
PMR-24V/48V1K5W1BTB

Power System :

- 1 24V DC PSU
- 2 48V DC Pump PSU

Control & Drives :

- 3 Control BD
- 4 7" HMI
- 5 Temperature Sensors

Cooling System :

- 6 Primary Circuit Control Valve
- 7 Secondary Circuit Pumps
- 8 Fill Pump
- 9 Fan x 2

Product Portfolio for Data Center CDU

Fan Drive



Force-GT 1φ

(Long E-Cap Life & High Temp Capability)

48V (240W / 480W)



PMR SMART (PMS)

(Compact Size & <1U & Current Sharing & Communication & Peak Power)

48V (750W peak to 1200W)

48V (1200W peak to 1500W)

48V (2500W peak to 3200W)



PMR

(Compact Size + Active PFC)

PMR-48V600W1BT

PMR-48V1K01BT

PMR-48V1K5W1BTB



DIN Pro 1φ

(60°C + Peak Power + R/C)

48V (240W / 480W / 960W)

New

Control



DIN Pro 1φ

(60°C + Peak Power + R/C)

24V (120W / 240W / 480W / 960W)

New



Force-GT 1φ

(Long E-Cap Life & High Temp Capability)

24V (120W / 240W / 480W)



PMR SMART (PMS)

(Compact Size & <1U & Current Sharing & Communication & Peak Power)

24V (750W peak to 1200W)

24V (1200W peak to 1500W)

24V (2500W peak to 3200W)



Force-GT 3φ

(Long E-Cap Life & High Temp Capability)

24V (120W / 240W / 480W)



Din Eco 3φ

(Cost Effective + Slim Width)

24V (120W / 240W / 480W / 960W)

New



PMR

(Compact Size Efficiency & Active PFC)

24V (150W / 240W / 320W / 600W / 1000W / 1500W)

DIN Rail Power Supply

DIN Pro

1- Phase

- DRF-12V/24V/48V120W1PBA
- DRF-12V/24V/48V240W1PBA
- DRF-24V/48V480W1PBA
- DRF-24V/48V960W1PBA



New
Launch

120W ~ 960W 1- Phase Input

Key Features

85~305V

Wide Range AC Operating
(305V for 60s)



DIN Pro
1- Phase Series

(120W- 960W)



150% 5sec.
500% 5ms.

Power Boost Capability



Extreme Temperature


- 40°C to
+80°C

Operating Range



PCBA


Conformal Coating
Available




Current Sharing for
Parallel Application (960W 3+1)



EMS Immunity
(IEC 61000-4-6, 20Vrms)



Compliance with
SEMI F47

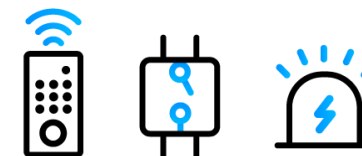

Remote Control, DC OK Relay &
LED Indicator

DIN Rail Power Supply

DIN Eco 3-Phase Series

- DRL-24V/48V120W3EN
- DRL-24V/48V240W3EN
- DRL-24V/48V480W3EN
- DRL-24V/48V960W3EN



New
Launch


120W ~ 960W 3-Phase AC Input

Key Features

340~575V

3 Phase AC input Operating

(3ENA input up to 600V)




95%

Ultra-High Efficiency




DIN Eco
3-Phase Series

(120W- 960W)




**Wide Operating
Ambient
Temperature**




4KV/2KV

**Surge Protection
Capacity**



**DC OK relay (>480W)
and LED Indicator**



Slim & Compact




**Meet Global Certified
IEC/EN/UL
62368-1 / 61010-1**

DeltaPSU Website and Social Media

Our responsive homepage adapts to desktop PCs and mobile devices.

Simply visit psu.deltaww.com for all your product needs.

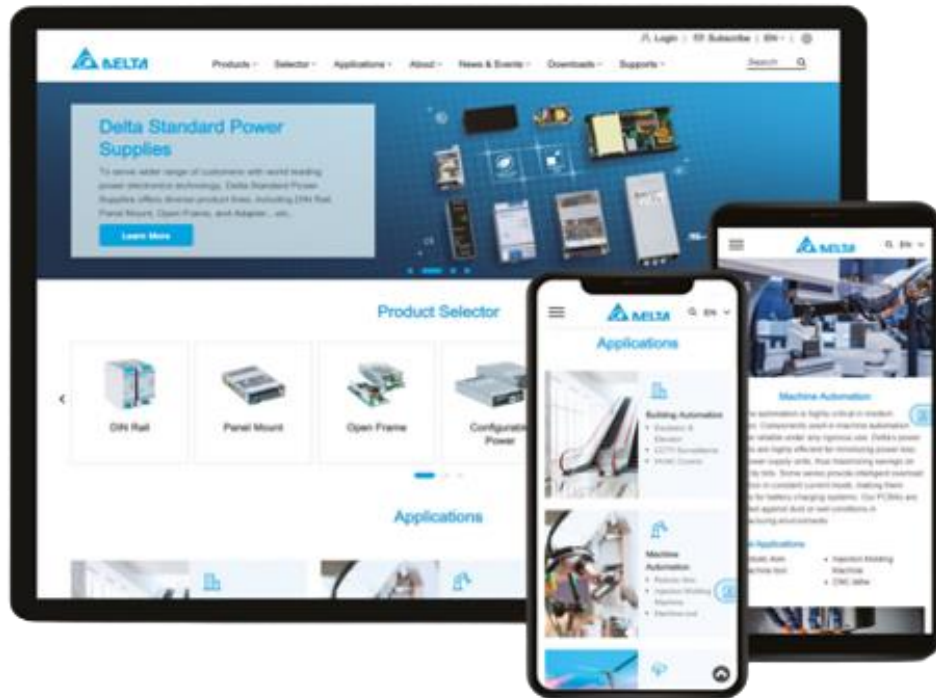

For more information, find us at :



LinkedIn

www.linkedin.com/company/deltapsu



YouTube

www.youtube.com/DeltaPowerSupplies



Facebook

www.facebook.com/DeltaPSU



WeChat

台达标准电源



Thanks.

Smarter. Greener. Together.

