

Sales Kit for Industry – EV Charger

Product Marketing | SPSBU
2026



Industrial for EV Charger



Feature for Application

- 6kV Surge Protection
- Wide Operating Temperature & Conformal Coating
- 150% 5 sec. Power Boost Capability
- Superior Conducted Immunity

Benefit for Customers

- Safeguards Against Grid and Lightning Surges
- Withstands Extreme Weather and Moisture
- Handles Relay Pull-in Without Oversizing
- Ensures Interference-free Communication

EV Fast-Charging Station - 100kW / 200kW



- 1 Aux Power
- 2 CSU
- 3 Relay
- 4 FAN
- 5 HMI

● SPS product offering ● Power to

Key Features & Customer Benefits

- **6kV(3Φ) / 4kV(1Φ) Surge (w/ SPD):** safeguards against lightning
- **Wide Temp. & Conformal Coating:** withstands extreme weather
- **150% 5s Power Boost:** easily handles relay pull-in
- **High Conducted Immunity:** ensures stable communication

Applicable Models



DIN Pro 1Φ

DRF-12V/24V/48V240W1PBA
DRF-24/48V480W1PBA

New



PMR

PMR-12V/24V/48V240W1AT
PMR-12V/24V/48V320W1AT
PMR-12V/24V/48V600W1BT



DIN Eco 3Φ

DRL-24/48V240W3EN
DRL-24/48V480W3EN

New



CliQ II 2Φ


DRP-24V240W2BN

EV Fast-Charging Station - 350kW

Power Cabinet



Dispenser

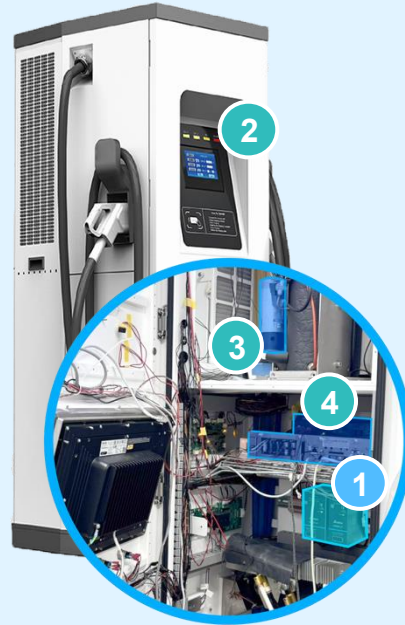

+

- | | | | |
|-------------|----------------|-------------|-------|
| 1 Aux Power | 2 Power module | 1 Aux Power | 2 HMI |
| 3 Fan Tray | 4 AC Breaker | 3 Relay | 4 CSU |
| 5 CSU | | | |

● SPS product offering ● Power to ● Electrical Components

Key Features & Customer Benefits

- **6kV(3Φ) / 4kV(1Φ) Surge (w/ SPD):** safeguards against lightning
- **Wide Temp. & Conformal Coating:** withstands extreme weather
- **150% 5s Power Boost:** easily handles relay pull-in
- **High Conducted Immunity:** ensures stable communication

Applicable Models

Power Cabinet



DRM 1Φ

DRM-24V/480W1PN
DRM-24V/960W1PN

Dispenser



DIN Pro 1Φ

DRF-24V/48V/480W1PBA
DRF-24V/48V/960W1PBA

New



DIN Eco 3Φ

DRL-24V/48V/480W3EN
DRL-24V/48V/960W3EN

New



PMR

PMR-12V/24V/48V/320W1AT
PMR-12V/24V/48V/600W1BT
PMR-12V/24V/48V/1K0W1BT

Product Portfolio for EV Fast-Charging Station



DIN Rail Power Supply

DIN Pro

1- Phase

- DRF-12V/24V/48V120W1PBA
- DRF-12V/24V/48V240W1PBA
- DRF-24V/48V480W1PBA
- DRF-24V/48V960W1PBA



New
Launch

120W ~ 960W 1- Phase Input

Key Features

85~305V

Wide Range AC Operating
(305V for 60s)



DIN Pro
1- Phase Series

(120W- 960W)



150% 5sec.
500% 5ms.

Power Boost Capability



Extreme Temperature


- 40°C to
+80°C

Operating Range



PCBA


Conformal Coating
Available




Current Sharing for
Parallel Application (960W 3+1)



EMS Immunity
(IEC 61000-4-6, 20Vrms)



Compliance with
SEMI F47

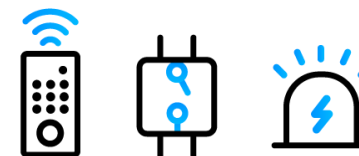

Remote Control, DC OK Relay &
LED Indicator

DIN Rail Power Supply

DIN Eco 3-Phase Series

- DRL-24V/48V120W3EN
- DRL-24V/48V240W3EN
- DRL-24V/48V480W3EN
- DRL-24V/48V960W3EN




New
Launch

120W ~ 960W 3-Phase AC Input

Key Features

340~575V

3 Phase AC input Operating
(3ENA input up to 600V)



95%

Ultra-High Efficiency



DIN Eco
3-Phase Series

(120W- 960W)



-40~70°C

**Wide Operating
Ambient
Temperature**




4KV/2KV

**Surge Protection
Capacity**



**DC OK relay (>480W)
and LED Indicator**



Slim & Compact




**Meet Global Certified
IEC/EN/UL
62368-1 / 61010-1**

DeltaPSU Website and Social Media

Our responsive homepage adapts to desktop PCs and mobile devices.

Simply visit psu.deltaww.com for all your product needs.

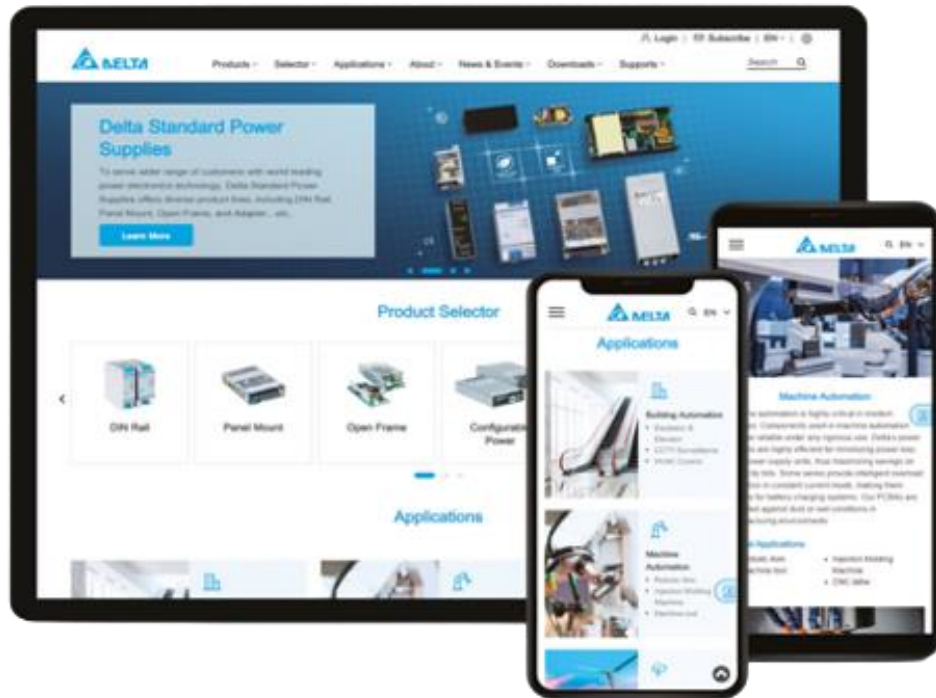

For more information, find us at :



LinkedIn

www.linkedin.com/company/deltapsu



YouTube

www.youtube.com/DeltaPowerSupplies



Facebook

www.facebook.com/DeltaPSU



WeChat

台达标准电源



Thanks.

Smarter. Greener. Together.

