

Sales Kit for Industry – Green Energy

Product Marketing | SPSBU
2026



Industrial PSU for Green Energy




Feature for Application

- Wide Operating Ambient Temperature
- 3-phase AC Input Operating 350~575V
- High Surge Protection Capacity
- Remote Monitoring with DC OK Relay

Benefit for Customers


- Ensures Stability in Extreme Environments
- Delivers Continuous Power and System Stability
- Assures Durability and Safety for Critical Applications
- Enables Alerts for Preventive Maintenance

Wind Turbine System

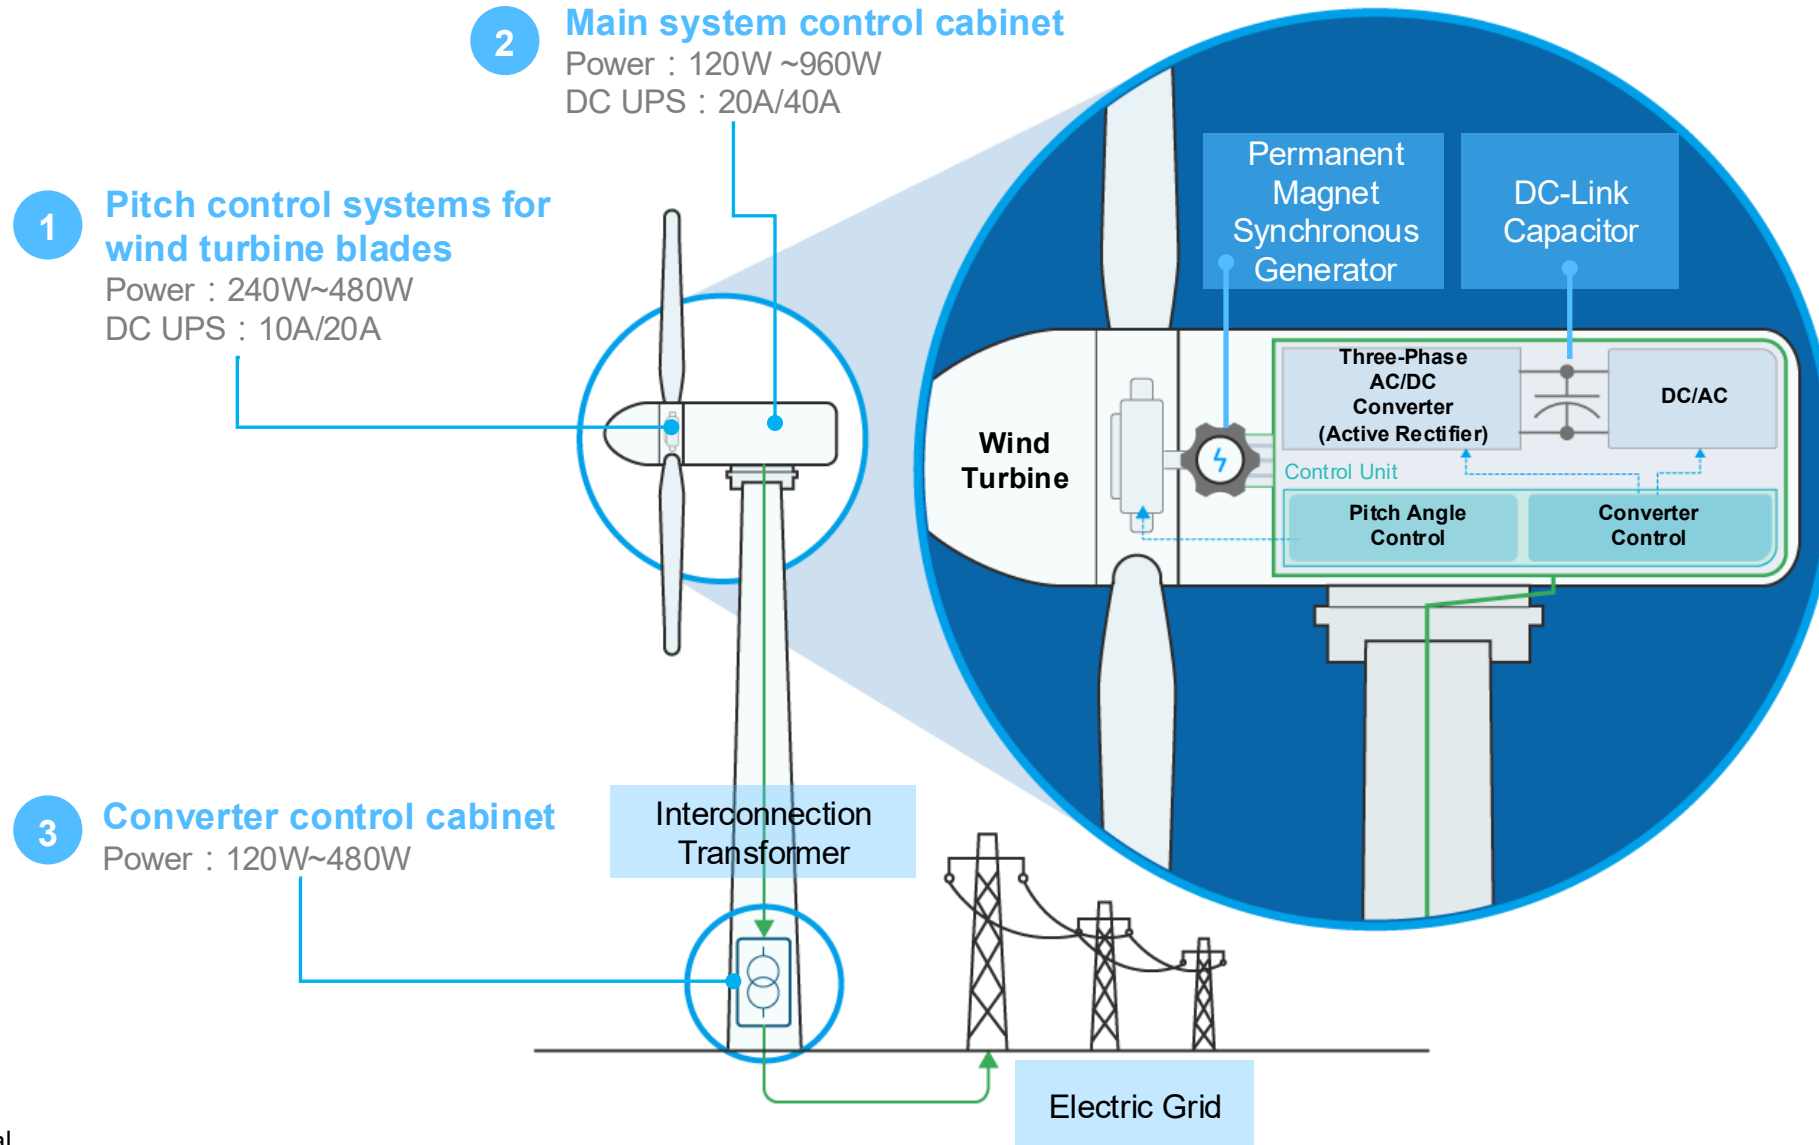

Wind Turbine System

Pitch control systems for
wind turbine blades

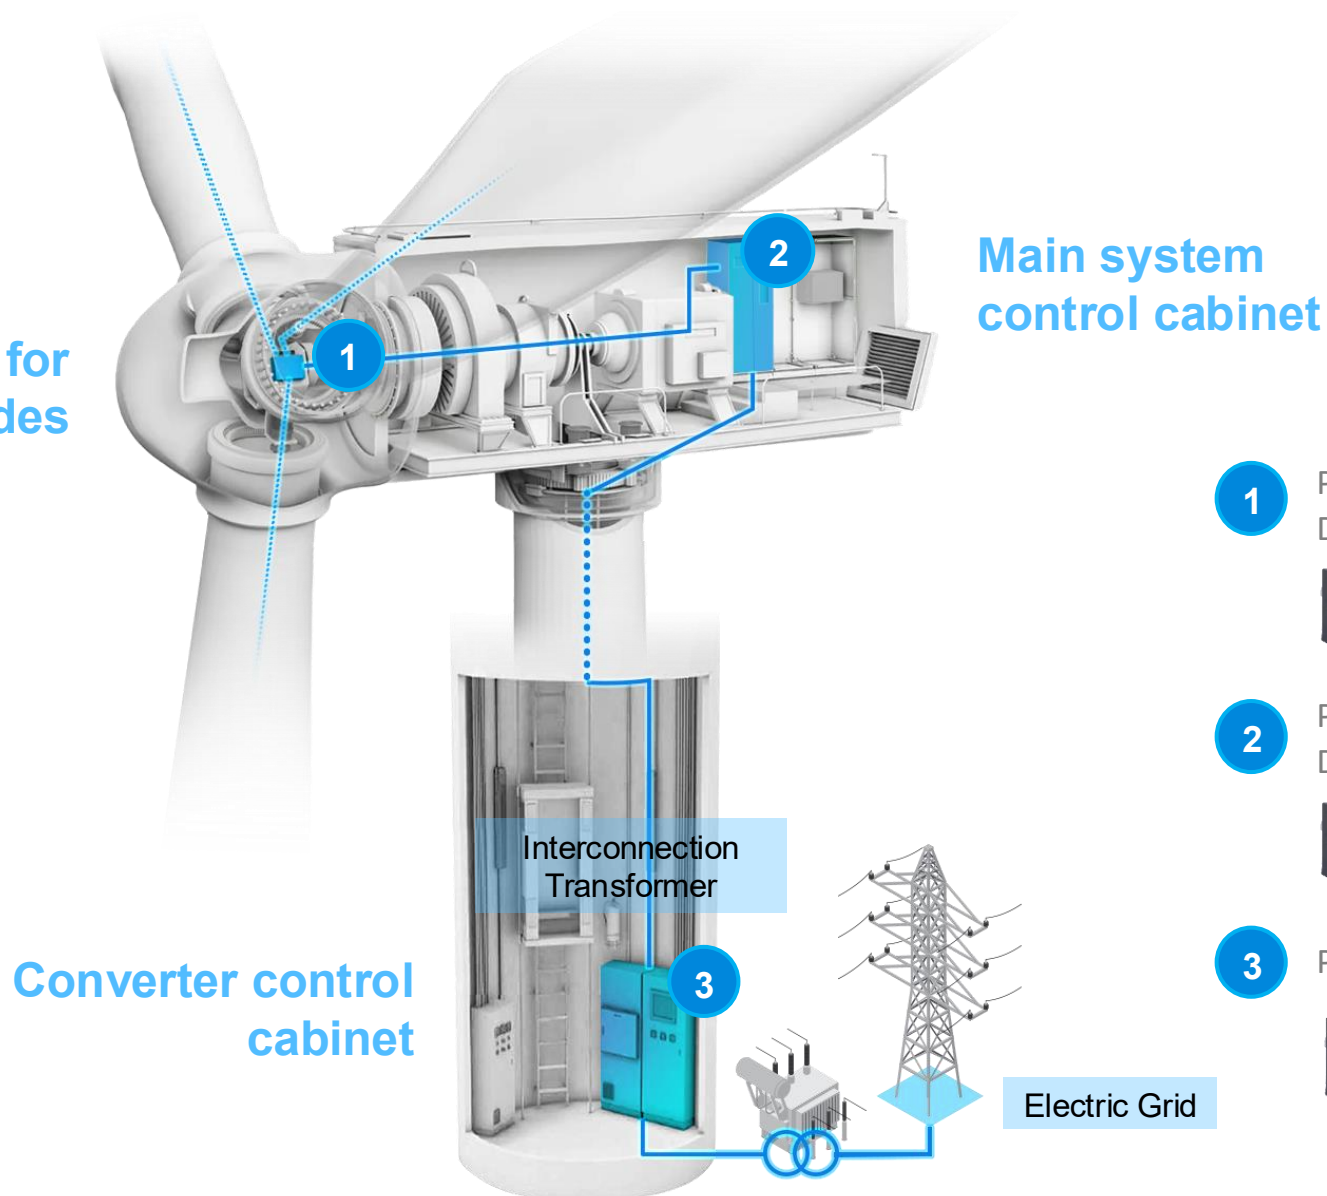

1

Power : 240W~480W
DC UPS : 10A / 20A



2

Power : 120W~960W
DC UPS : 20A / 40A




3

Power : 120W~480W



Pitch Control Systems for Wind Turbine Blades

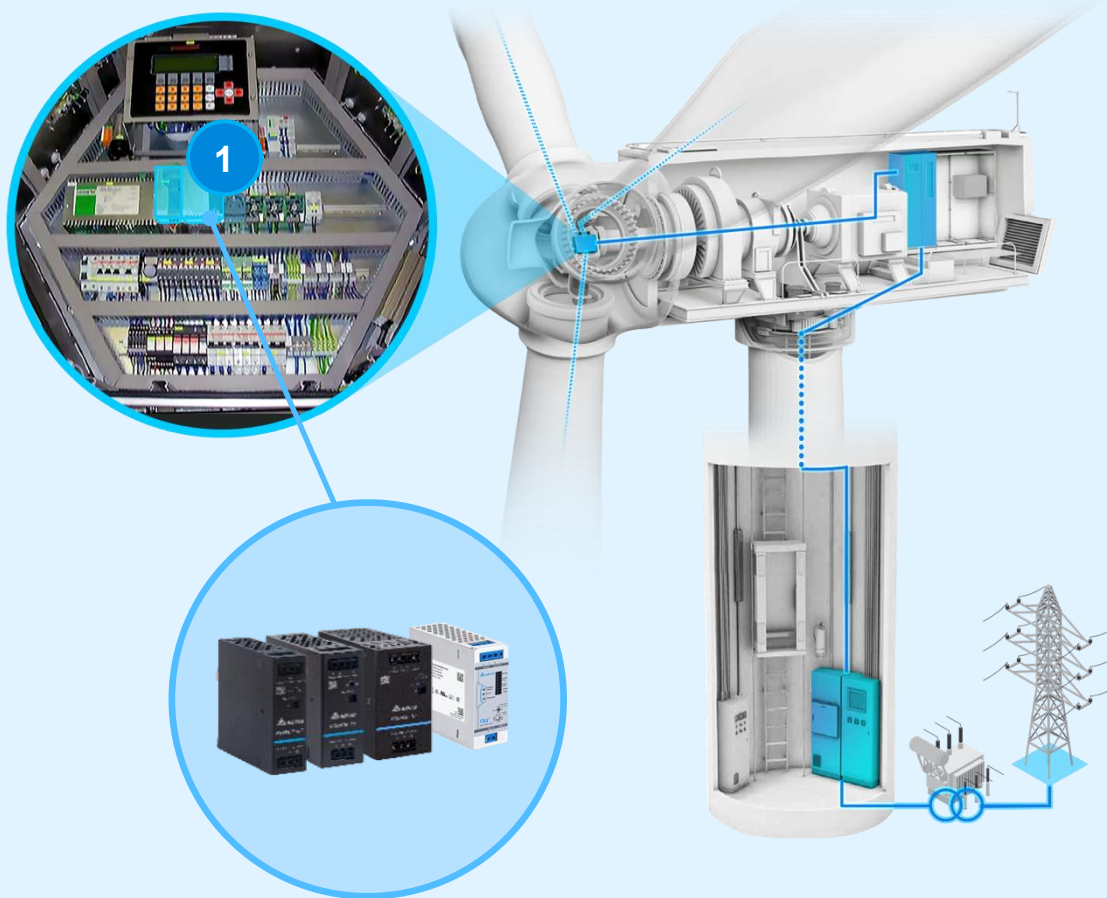

Key Features & Customer Benefits

- **-40 °C ~80 °C Operating Temperature:** ensures stability in extreme environments
- **High Surge Protection Capacity (4KV/2KV) :** assures durability and safety
- **Remote Monitoring with DC OK Relay:** enables alerts for preventive maintenance
- **Slim & Compact and Ultra-high Efficiency (>95%) :** saves valuable space and energy
- **Spring Connector for Easy Installation:** save labor and maintenance cost

Applicable Models



DRM 3φ (salt spray)

DRM-24V480W3PN
DRM-24V960W3PN



DRM 1φ (salt spray)

DRM-24V480W1PN
DRM-24V960W1PN



DIN Eco 3φ

DRL-24V480W3EN
DRL-24V960W3EN

New



Din Pro 1φ

DRF-24V480W1PBA
DRF-24V960W1PBA


New



DRU (DC UPS)

DRU-24V20AMN
DRU-24V40AMN

Main System Control Cabinet

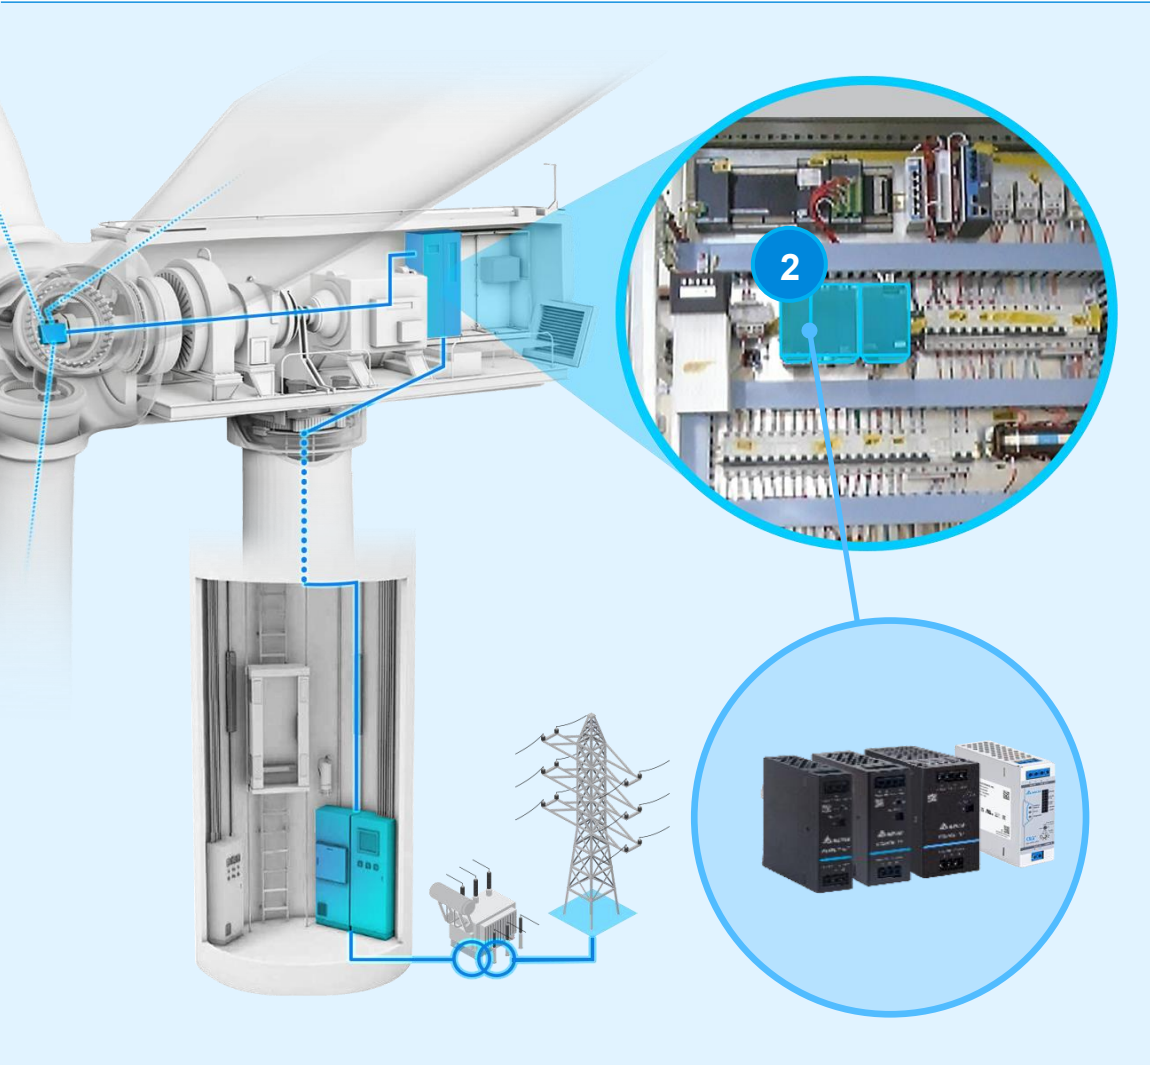

Key Features & Customer Benefits

- **-40 °C ~80 °C Operating Temperature:** ensures stability in extreme environments
- **High Surge Protection Capacity (4KV/2KV) :** assures durability and safety
- **Remote Monitoring with DC OK Relay:** enables alerts for preventive maintenance
- **Slim & Compact and Ultra-high Efficiency (>95%) :** saves valuable space and energy

Applicable Models



DRM 3 ϕ (salt spray)

DRM-24V480W3PN
DRM-24V960W3PN



DRM 1 ϕ (salt spray)

DRM-24V480W1PN
DRM-24V960W1PN



DIN Eco 3 ϕ

DRL-24V480W3EN
DRL-24V960W3EN

New



Din Pro 1 ϕ

DRF-24V480W1PBA
DRF-24V960W1PBA


New



DRU (DC UPS)

DRU-24V20AMN
DRU-24V40AMN

Converter Control Cabinet

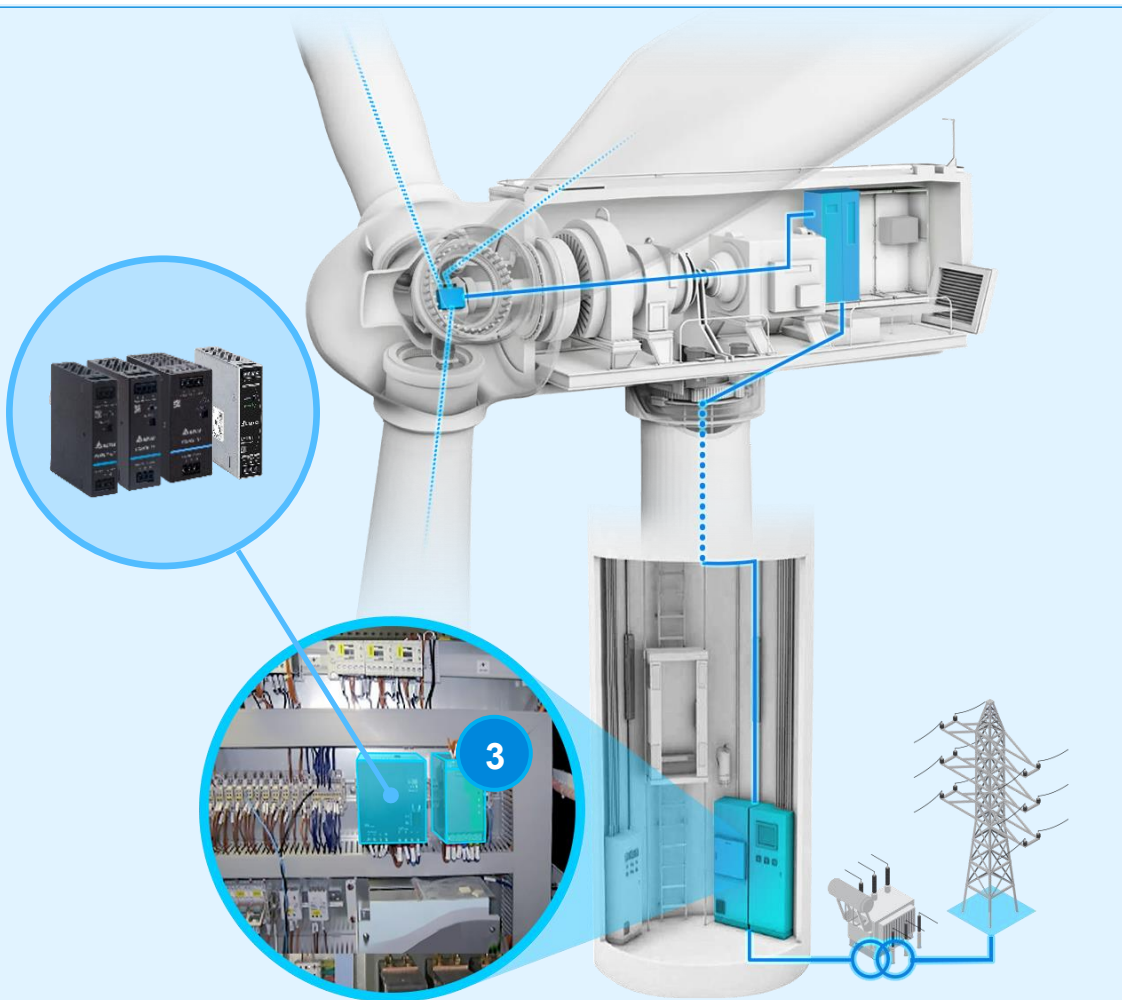

Key Features & Customer Benefits

- **-40 °C ~80 °C Operating Temperature:** ensures stability in extreme environments
- **High Surge Protection Capacity (4KV/2KV) :** assures durability and safety
- **Remote Monitoring with DC OK Relay:** enables alerts for preventive maintenance

Applicable Models



DRM 1φ (salt spray)

DRM-24V480W1PN



Din Pro 1φ

DRF-24V120W1PBA
DRF-24V240W1PBA
DRF-24V480W1PBA

New





Force GT 1φ

DRF-24V120W1GBA
DRF-24V240W1GBA
DRF-24V480W1GBA

Product Portfolio for Wind Power



Energy Storage System Solutions

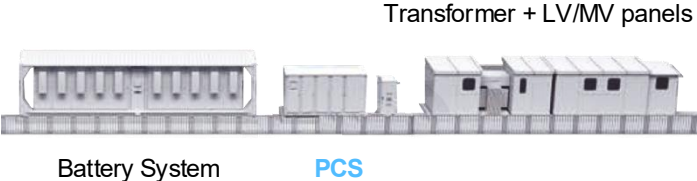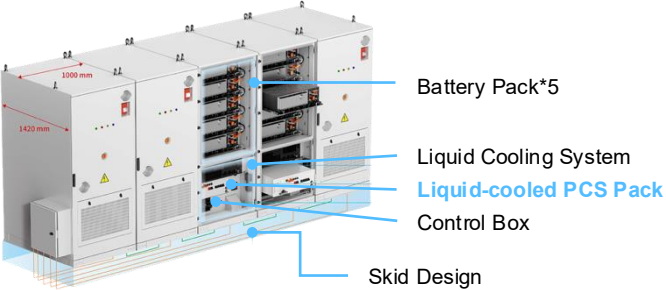Type	Distributed	All-in-One	
	M MW Level	U Utility Level	C Commercial Level
	  Transformer + LV/MV panels Battery System PCS	  LV/MV panels Batteries + PCS + Controller	  Battery Pack*5 Liquid Cooling System Liquid-cooled PCS Pack Control Box Skid Design
Applications	Ancillary Services, Solar-Plus-Storage, Energy-Heavy Industries, Microgrids	Ancillary Services, Solar-Plus-Storage, Energy-Intensive Industries, Microgrids	Commercial Buildings, EV Charging Stations, Factories

Distributed ESS – MW PCS



Key Features & Customer Benefits

- **-40 °C ~80 °C Operating Temperature:** ensures stability in extreme environments
- **High Surge Protection Capacity (4KV/2KV) :** assures durability and safety
- **Remote Monitoring with DC OK Relay:** enables alerts for preventive maintenance
- **Slim & Compact and Ultra-high Efficiency (>95%) :** saves valuable space and energy

Applicable Models



Din Pro 1φ

DRF-24V120W1PBA

New



Force GT 1φ

DRF-24V120W1GBA




DIN Eco 3φ

DRL-24V120W3EN

New

All-in-One ESS for Utility – Battery Container

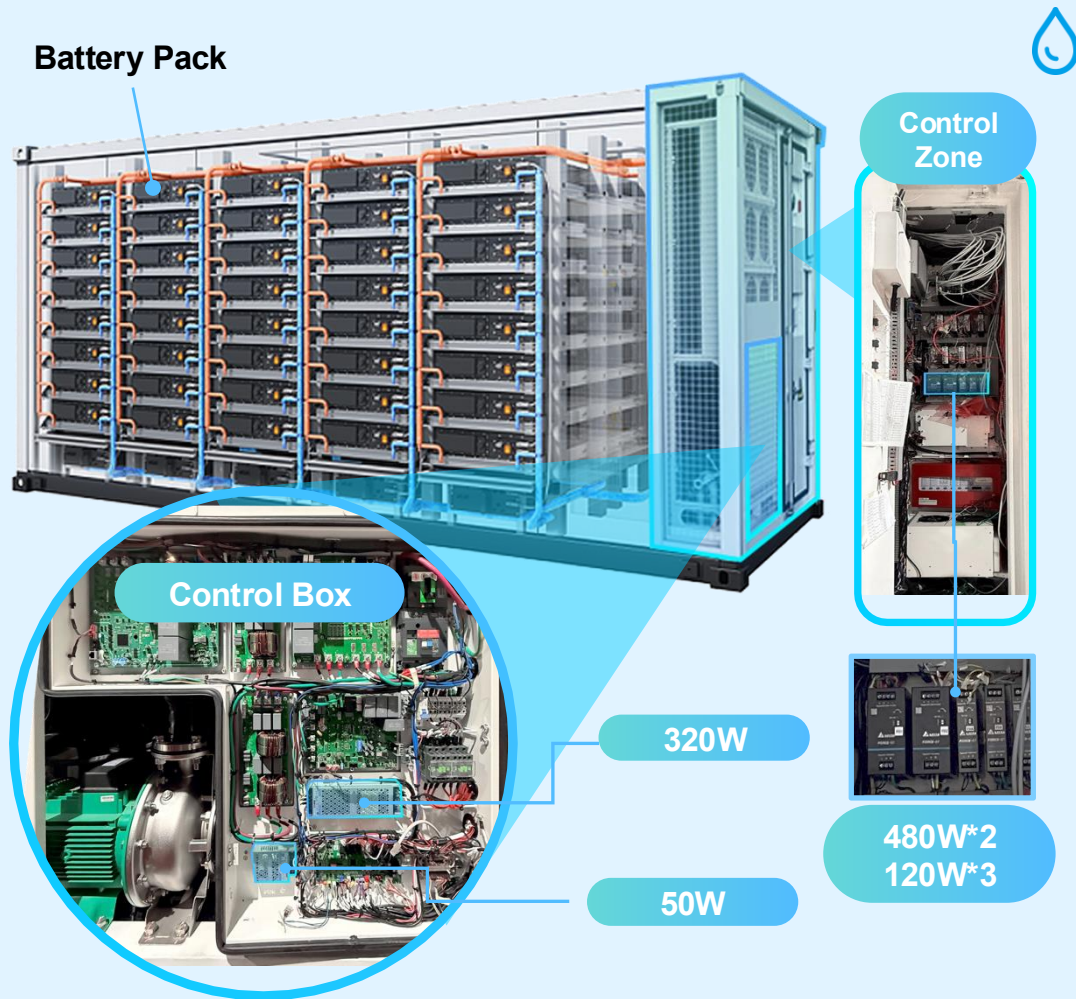

Key Features & Customer Benefits

- **-40 °C ~80 °C Operating Temperature**: ensures stability in extreme environments
- **High Surge Protection Capacity (4KV/2KV)** : assures durability and safety
- **Remote Monitoring with DC OK Relay**: enables alerts for preventive maintenance
- **Slim & Compact and Ultra-high Efficiency (>95%)**: saves valuable space and energy

Applicable Models



Din Pro 1φ

New

DRF-24V480W1PBA
DRF-24V240W1PBA
DRF-24V120W1PBA



Force GT 1φ

DRF-24V120W1GBA
DRF-24V240W1GBA
DRF-24V480W1GBA



DIN Eco 3φ

New


DRL-24V120W3EN
DRL-24V240W3EN
DRL-24V480W3EN



PMR/PMT

PMR-24V320W
PMT-24V50W

All-in-One ESS – Liquid - cooled PCS Pack

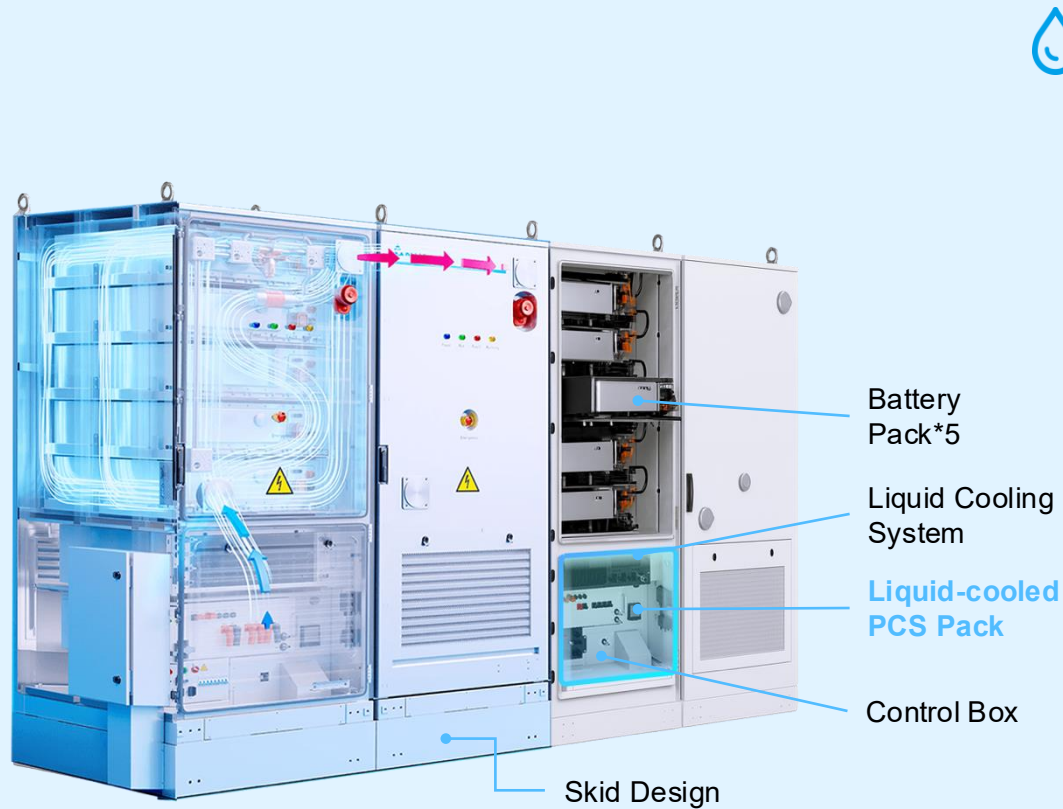

Key Features & Customer Benefits

- **-40 °C ~70 °C Operating Temperature:** ensures stability in extreme environments
- **High Surge Protection Capacity (4KV/2KV):** assures durability and safety
- **Remote Monitoring with DC OK Relay:** enables alerts for preventive maintenance
- **Slim & Compact and Ultra-high Efficiency (>95%):** saves valuable space and energy
- **Peak Power Capability:** easily handles high power budget

Applicable Models



PMS

PMT-48V1K2W1BTD
PMS-48V2K5W1BTD

Product Portfolio for ESS

Pro



CliQ M 1φ & 3φ

(60 °C+ Marine + 150% Peak)

1φ - 24V (120W / 240W / 480W / 960W)
3φ - 24V (480W / 960W)



Din Pro 1φ

New

1φ - 12V / 2 4V / 48V (120W / 240W)
1φ - 24V / 48V (480W / 960W)



Force-GT 1φ & 3φ

(up to 60 °C+ Long Life E-Cap)

1φ - 12V / 24V / 48V (120W / 240W)
1φ - 24V / 48V (480W)
3φ - 24V (120W / 240W)
3φ - 24V / 48V (480W / 960W)



PMR

(PFC + Household + 1U)

12V 24V 36V 48V (150W / 240W / 320W /
600W / 1000W)



PMR SMART (PMS)

(Compact Size & <1U & Current sharing & Communication & Peak Power)

24V / 48V (750W peak to 1200W)
24V / 48V (1200W peak to 1500W)
24V / 48V (2500W peak to 3200W)

Eco



Lyte II 1φ

(Cost Effective + Slim Width)

12V / 24V / 48V (120W / 240W)
24V / 48V (480W / 960W)



Din Eco 3φ

New

(Cost Effective + Slim Width)

3φ - 24V / 48V (120W / 240W / 480W / 960W)



PMT2

(Economic + Compact size)

12V / 24V / 36V / 48V (150W / 200W / 350W)

DIN Rail Power Supply

DIN Pro

1- Phase

- DRF-12V/24V/48V120W1PBA
- DRF-12V/24V/48V240W1PBA
- DRF-24V/48V480W1PBA
- DRF-24V/48V960W1PBA



New
Launch

120W ~ 960W 1- Phase Input

Key Features

85~305V

Wide Range AC Operating
(305V for 60s)



DIN Pro
1- Phase Series

(120W- 960W)



150% 5sec.
500% 5ms.

Power Boost Capability



Extreme Temperature


- 40°C to
+80°C

Operating Range



PCBA


Conformal Coating
Available




Current Sharing for
Parallel Application (960W 3+1)



EMS Immunity
(IEC 61000-4-6, 20Vrms)



Compliance with
SEMI F47

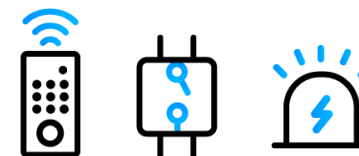

Remote Control, DC OK Relay &
LED Indicator

DIN Rail Power Supply

DIN Eco 3-Phase Series

- DRL-24V/48V120W3EN
- DRL-24V/48V240W3EN
- DRL-24V/48V480W3EN
- DRL-24V/48V960W3EN



New
Launch


120W ~ 960W 3-Phase AC Input

Key Features

340~575V

3 Phase AC input Operating

(3ENA input up to 600V)




95%

Ultra-High Efficiency




DIN Eco
3-Phase Series

(120W- 960W)




-40~70°C

**Wide Operating
Ambient
Temperature**




4KV/2KV

**Surge Protection
Capacity**



**DC OK relay (>480W)
and LED Indicator**



Slim & Compact




**Meet Global Certified
IEC/EN/UL
62368-1 / 61010-1**

DeltaPSU Website and Social Media

Our responsive homepage adapts to desktop PCs and mobile devices.

Simply visit psu.deltaww.com for all your product needs.

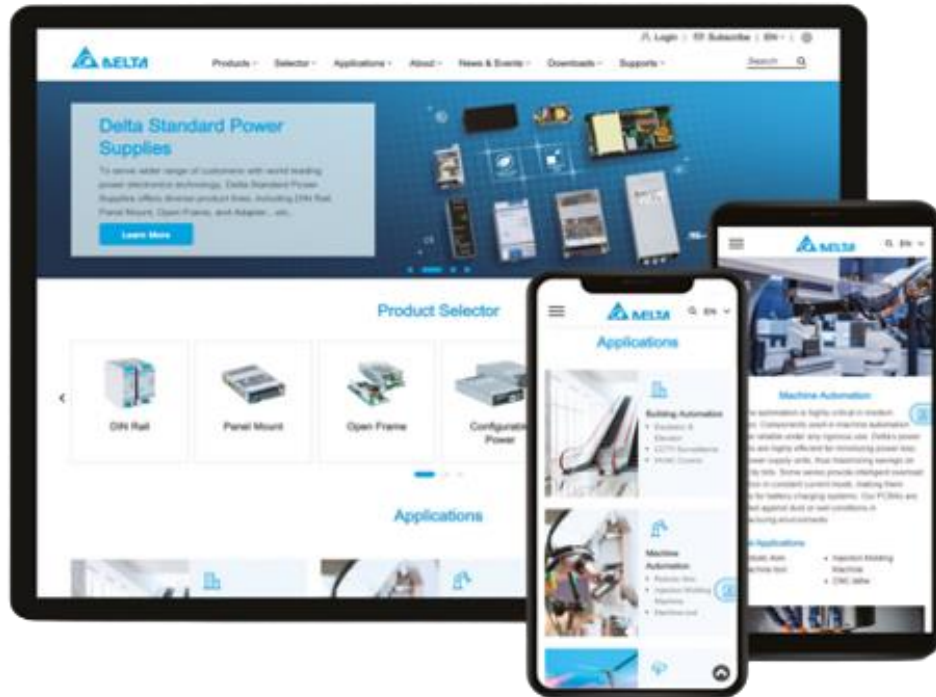

For more information, find us at :



LinkedIn

www.linkedin.com/company/deltapsu



YouTube

www.youtube.com/DeltaPowerSupplies



Facebook

www.facebook.com/DeltaPSU



WeChat

台达标准电源



Thanks.

Smarter. Greener. Together.

