

Sales Kit for Industry – Cobot

Product Marketing | SPSBU
2026




Industrial for Cobot



Feature for Application

- Peak Power Function for Motor Drive
- Ultracompact Cabinet Footprint
- High Efficiency & Power Density
- Conformal Coating and Long-life Capacitors

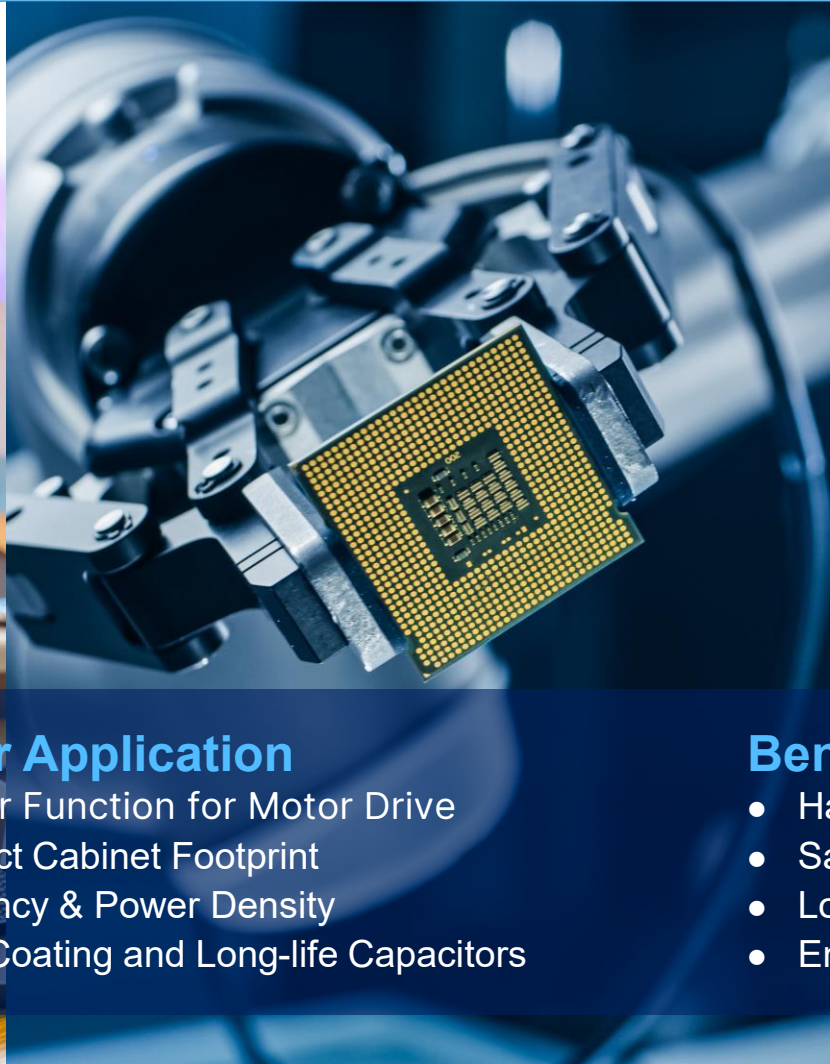

Benefit for Customer

- Handles High Startup Loads
- Saves Valuable Cabinet Space
- Lowers Operating & Cooling Costs
- Ensures Long-term Reliability

Robots Drive & Control



- Motor drive : AC Servo



- Control : AC/DC Power Supply



Traditional
Robot

AC Drive

Collaborative
Robot

DC Drive



- Motor drive : AC/DC Power Supply



- Control : AC/DC Power Supply




- Collaborative & Safety

- Interact with people
- No need protected caging



- Commercialize & Close to Life



Health care




Retail



Restaurant

Cobot Control Box

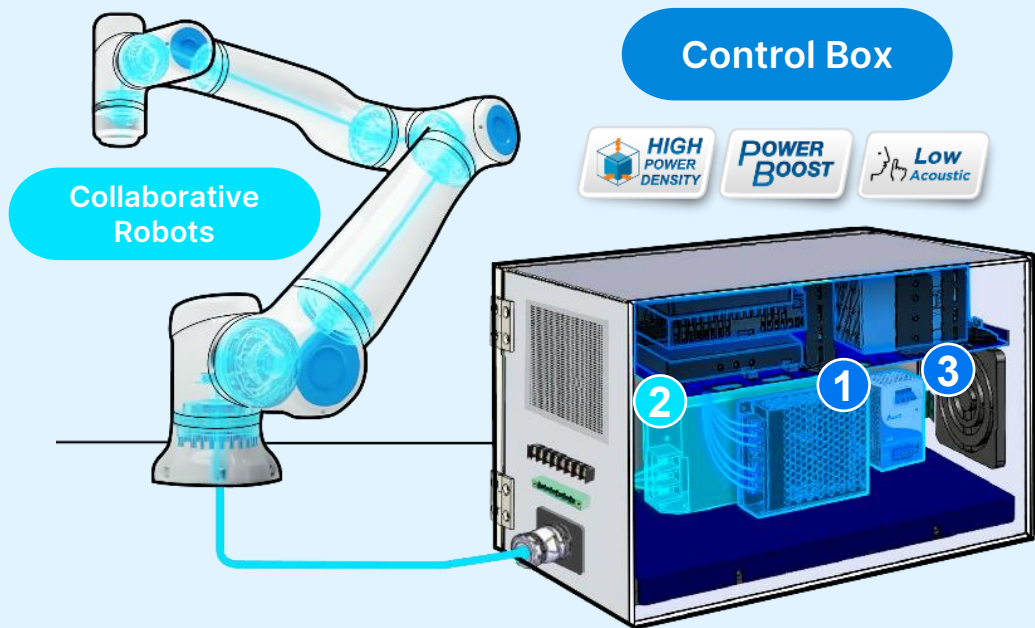

Collaborative Robots

Control Box



- 1 Control Power (24V)**
Power : 240W~480W
Buffer module : 20A
- 2 Robot Drive (48V)**
Power : 120W~960W
Buffer module : 40A
- 3 Buffer Module (Optional)**
Power : 120W~480W

Key Features & Customer Benefits

- **150% Power Boost:** supports inrush currents or inductive loads without oversizing PSU
- **Ultracompact Footprint:** saves valuable cabinet space
- **High Efficiency:** lowers operating and cooling costs
- **Conformal coating & long-life capacitors:** ensure long-term reliability

Applicable Models

1 Control Power (24V)



Force GT

DRF-24V120W1GBA/GTA
DRF-24V480W1GBA/GTA



Din Pro 1φ

DRF-24V120W1PBA
DRF-24V480W1PBA

New



PMR Series 1φ

PMR-24V150W1AT
PMR-24V240W1AT
PMR-24V320W1AT

2 Robot Drive (48V)



DIN Pro 1φ

DRF-48V960W1PBA

New



PMS Series 1φ

PMS-48V1K2W1BTD
PMS-48V2K5W1BTD

3 Buffer Module (Optional)

CliQ II Buffer Modules



DRB-24V020ABN
DRB-24V040ABN

Product Portfolio for Collaborative Robots (Co-bot)



DIN Rail Power Supply

DIN Pro

1- Phase

- DRF-12V/24V/48V120W1PBA
- DRF-12V/24V/48V240W1PBA
- DRF-24V/48V480W1PBA
- DRF-24V/48V960W1PBA



New
Launch

120W ~ 960W 1- Phase Input

Key Features


85~277V

Wide Range AC Operating
(305V Available)



DIN Pro
1- Phase Series

(120W- 960W)




150% 5sec.
500% 5ms.
Power Boost Capability



Extreme Temperature
- 40°C to
+80°C
Operating Range




PCBA
Conformal Coating
Available




Current Sharing for
Parallel Application (960W 3+1)



EMS Immunity
(IEC 61000-4-6, 20Vrms)



Compliance with
SEMI F47

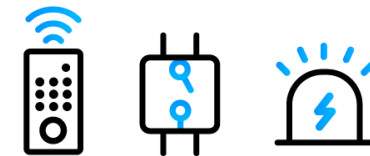


Remote Control, DC OK Relay &
LED Indicator

DeltaPSU Website and Social Media

Our responsive homepage adapts to desktop PCs and mobile devices.

Simply visit psu.deltaww.com for all your product needs.

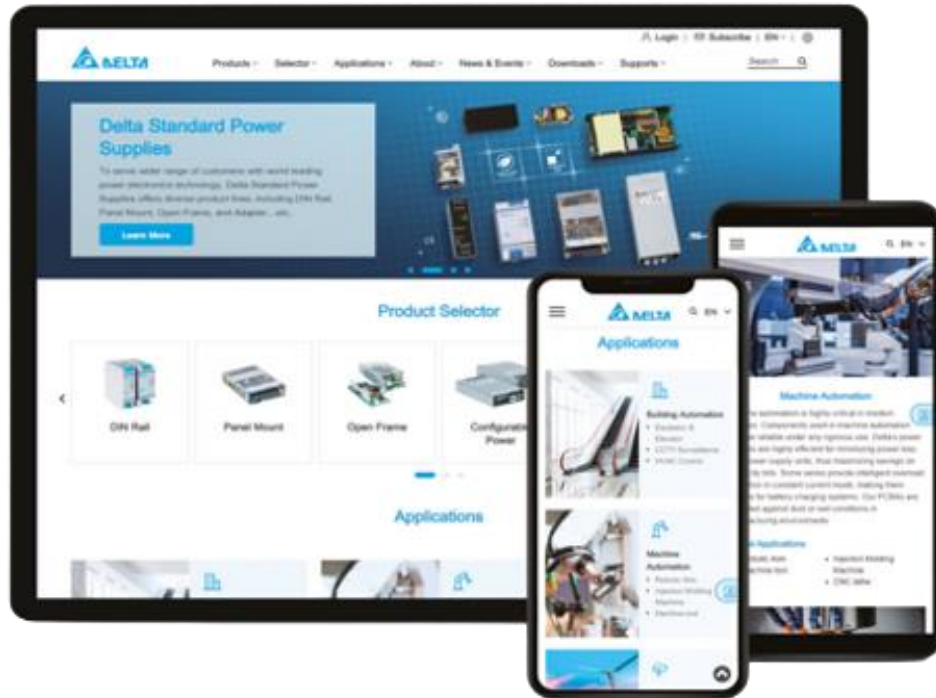

For more information, find us at :



LinkedIn

www.linkedin.com/company/deltapsu



YouTube

www.youtube.com/DeltaPowerSupplies



Facebook

www.facebook.com/DeltaPSU



WeChat

台达标准电源



Thanks.

Smarter. Greener. Together.

