


Sales Kit for Industry – Semiconductor

Product Marketing | SPSBU
2026



Industry for Semiconductor

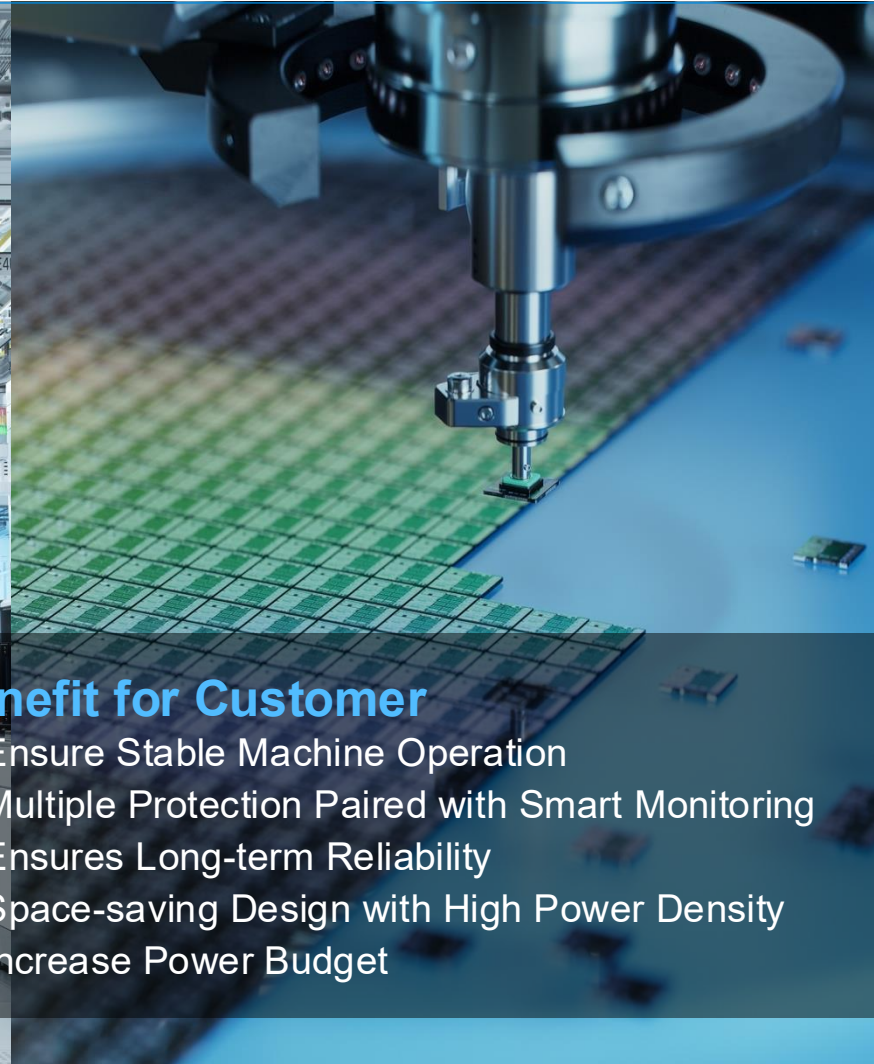


Feature for application

- SEMI F47 Voltage Sag Immunity
- DC OK Relay Contact
- Long Life and High Efficiency
- Peak Power Function
- Parallel Operation (960W 3+1)

Benefit for Customer

- Ensure Stable Machine Operation
- Multiple Protection Paired with Smart Monitoring
- Ensures Long-term Reliability
- Space-saving Design with High Power Density
- Increase Power Budget

Semiconductor Manufacturing Process

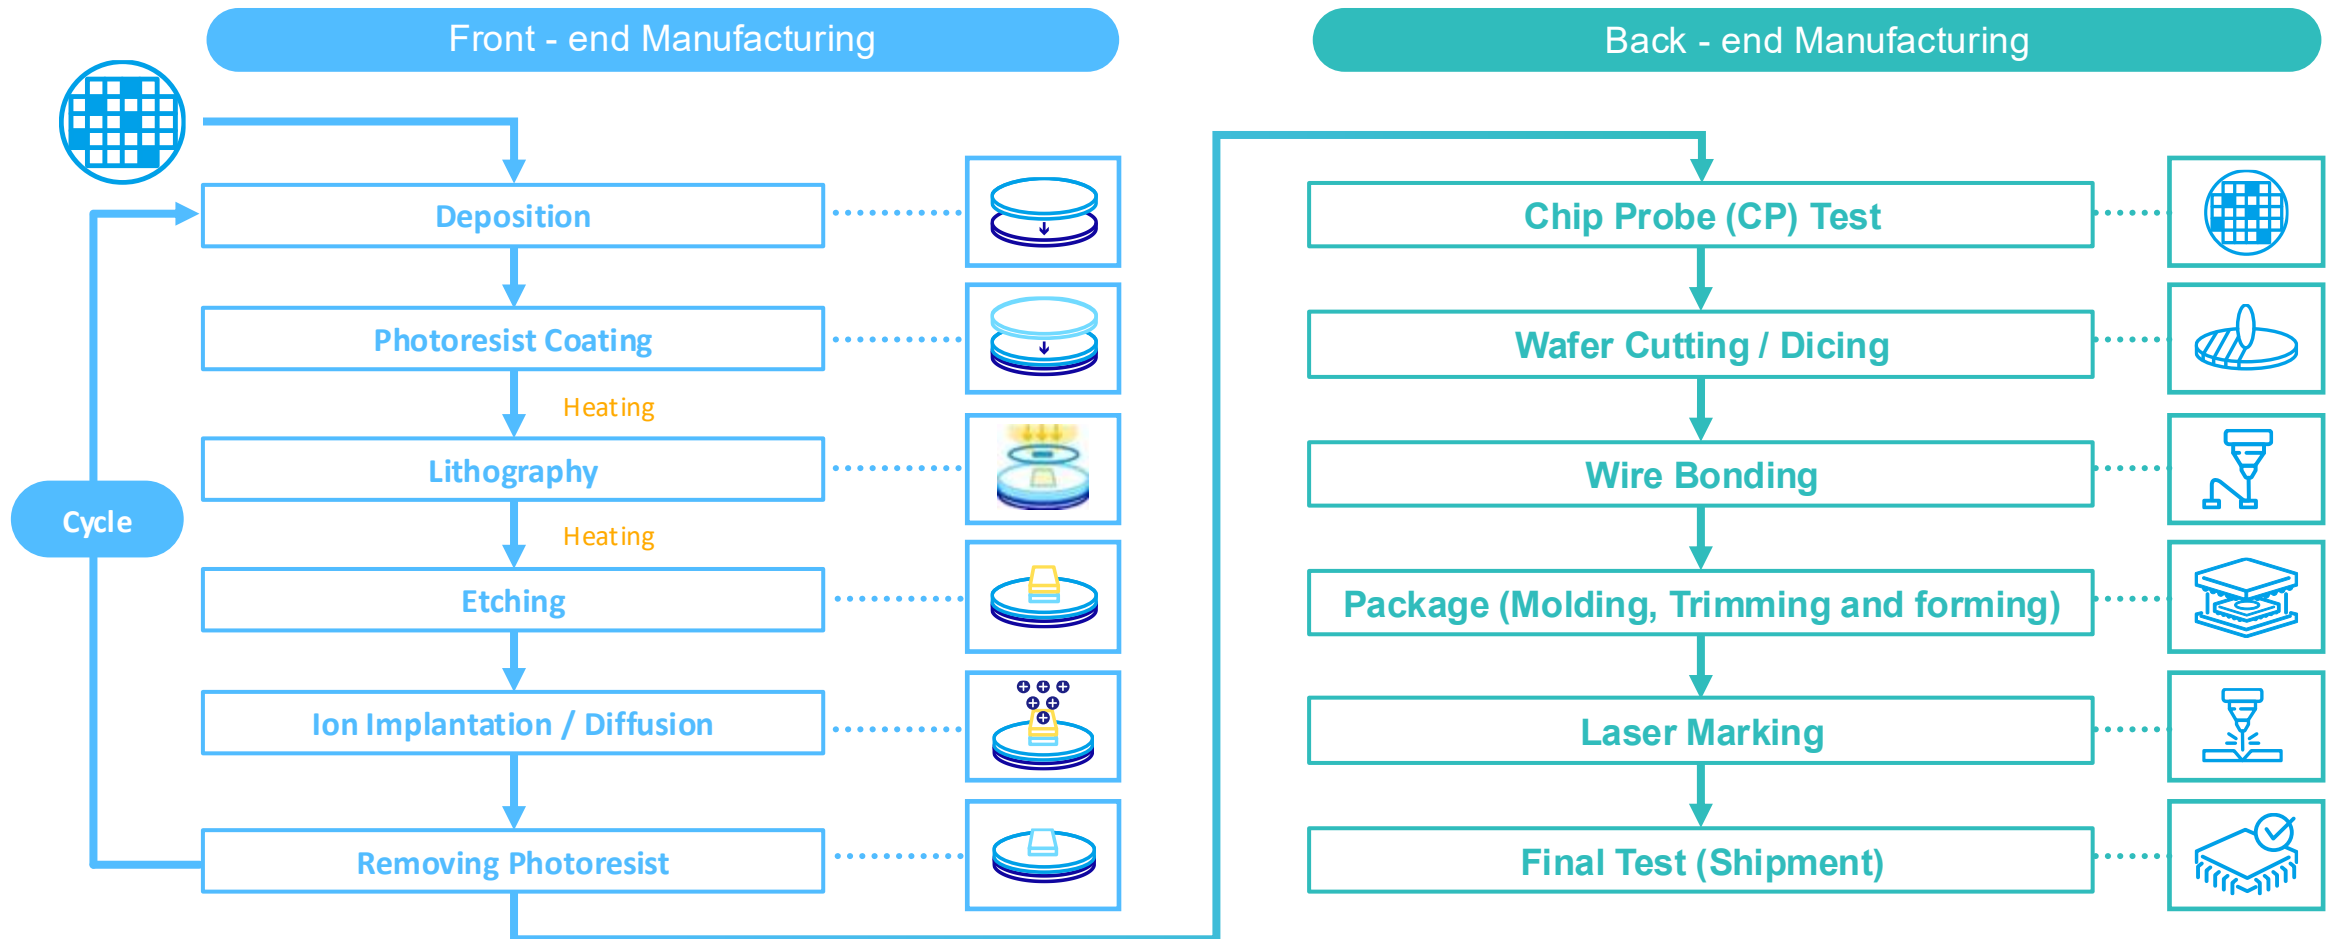

SEMI F47 Standard for Semiconductor

Reason for SEMI F47

Semiconductor factories require high levels of power quality due to the sensitivity of equipment and process controls.

Compliance with SEMI F47-0706 (latest SEMI F47 version updated in 2006)

Percent of Equipment Nominal Voltage	Duration (s)	Cycles at 50 Hz	Cycles at 60 Hz
50%	0.05 to 0.2s	2.5 to 10 cycles	3 to 12 cycles
70%	0.2s to 0.5s	10 to 25 cycles	12 to 30 cycles
80%	0.5s to 1s	25 to 50 cycles	30 to 60 cycles

Applicable Models

Model	Comply with SEMI F47 @200Vac
Din-Pro Series	V
Force-GT Series	V
PMR Series	V
MEG Series	V

Note: Fully Compliant with SEMI F47-0706 Standard

Front - End Process - Deposition



Key Features & Customer Benefits

- **Compliance with SEMI F47:** ensure stable machine operation
- **Long Life and High Reliability:** ensures long-term reliability
- **High Efficiency:** saves valuable space and energy
- **PMBus Communication:** real time monitoring

Applicable Models



Din-Pro

New

DRF-12V/24V/48V120W1PBA
DRF-12V/24V/48V240W1PBA
DRF-24V/48V480W1PBA
DRF-24V/48V960W1PBA



MEG-A

MEG-1K2A4
MEG-2K1A6
MEG-3K0A9



Force-GT

3 ϕ - 24V (120W/240W)
3 ϕ - 24V/48V (480W/960W)



PMR SMART (PMS)

PMS-24V/48V750W1BTD
PMS-24V/48V1K2W1BTD
PMS-12V/24V/48V2K5W1BTD

Front - End Process - Lithography



Key Features & Customer Benefits

- **Compliance with SEMI F47:** ensure stable machine operation
- **Long Life and High Reliability:** ensures long-term reliability
- **PMBus Communication:** real time monitoring
- **IEC 61000-4-6 20Vrms:** great EMS immunity

Applicable Models



Din-Pro

New

DRF-12V/24V/48V120W1PBA
DRF-12V/24V/48V240W1PBA
DRF-24V/48V480W1PBA
DRF-24V/48V960W1PBA



MEG-A

MEG-1K2A4
MEG-2K1A6
MEG-3K0A9



Force-GT

3 ϕ - 24V (120W/240W)
3 ϕ - 24V/48V (480W/960W)



PMR SMART (PMS)

PMS-24V/48V750W1BTD
PMS-24V/48V1K2W1BTD
PMS-12V/24V/48V2K5W1BTD

Front - End Process - Etching

Key Features & Customer Benefits

- **Compliance with SEMI F47:** ensure stable machine operation
- **Long Life and High Reliability:** ensures long-term reliability
- **PMBus Communication:** real time monitoring
- **IEC 61000-4-6 20Vrms:** great EMS immunity

Applicable Models



Din-Pro

New

DRF-12V/24V/48V120W1PBA
DRF-12V/24V/48V240W1PBA
DRF-24V/48V480W1PBA
DRF-24V/48V960W1PBA



MEG-A

MEG-1K2A4
MEG-2K1A6
MEG-3K0A9



Force-GT

3 ϕ - 24V (120W/240W)
3 ϕ - 24V/48V (480W/960W)



PMR SMART (PMS)

PMS-24V/48V750W1BTD
PMS-24V/48V1K2W1BTD
PMS-12V/24V/48V2K5W1BTD



Front - End Process - Ion Implantation / Diffusion



Key Features & Customer Benefits

- **Compliance with SEMI F47:** ensure stable machine operation
- **Long Life and High Reliability:** ensures long-term reliability
- **PMBus Communication:** real time monitoring
- **IEC 61000-4-6 20Vrms:** great EMS immunity

Applicable Models



Din-Pro

New

DRF-12V/24V/48V120W1PBA
DRF-12V/24V/48V240W1PBA
DRF-24V/48V480W1PBA
DRF-24V/48V960W1PBA



MEG-A

MEG-1K2A4
MEG-2K1A6
MEG-3K0A9



Force-GT

3 ϕ - 24V (120W/240W)
3 ϕ - 24V/48V (480W/960W)

Back - End Process - Final Test (Shipment)



Key Features & Customer Benefits

- **Compliance with SEMI F47:** ensure stable machine operation
- **Long Life and High Reliability:** ensures long-term reliability
- **PMBus Communication:** real time monitoring
- **Slim & Compact and Ultra-high Efficiency:** saves valuable space and energy

Applicable Models



Din-Pro

New

DRF-12V/24V/48V120W1PBA
DRF-12V/24V/48V240W1PBA
DRF-24V/48V480W1PBA
DRF-24V/48V960W1PBA



PMR SMART (PMS)

PMS-24V/48V750W1BTD
PMS-24V/48V1K2W1BTD
PMS-12V/24V/48V2K5W1BTD



Force-GT

3 ϕ - 24V (120W/240W)
3 ϕ - 24V/48V (480W/960W)

DIN Rail Power Supply

DIN Pro

1- Phase

- DRF-12V/24V/48V120W1PBA
- DRF-12V/24V/48V240W1PBA
- DRF-24V/48V480W1PBA
- DRF-24V/48V960W1PBA



New
Launch

120W ~ 960W 1- Phase Input

Key Features

85~305V

Wide Range AC Operating
(305V for 60s)



DIN Pro
1- Phase Series

(120W- 960W)



150% 5sec.
500% 5ms.

Power Boost Capability



Extreme Temperature


- 40°C to
+80°C

Operating Range



PCBA


Conformal Coating
Available




Current Sharing for
Parallel Application (960W 3+1)



EMS Immunity
(IEC 61000-4-6, 20Vrms)



Compliance with
SEMI F47

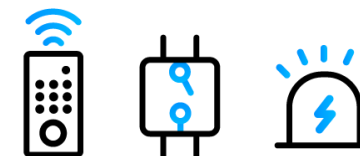

Remote Control, DC OK Relay &
LED Indicator

SPS Product Portfolio for Semiconductor

Front-End Process



DIN Pro 1φ

New

(Up to 60°C+ 150% Peak + R/C)
12V / 24V / 48V (120W / 240W / 480W / 960W)



Force-GT 1φ & 3φ

(Long E-Cap Life & High Temp Capability)
1φ - 12V / 24V / 48V (120W)
1φ - 24V / 48V (240W / 480W)
3φ - 24V / 48V (120W / 240W / 480W / 960W)
3φ - 48V (480W / 960W)



MEG-A

(Flexible Output Voltage & Communication)
700W / 1200W / 2100W / 3000W



PMR SMART (PMS)

(Compact Size & <1U & Current sharing & Communication & Peak Power)
24V / 48V (750W peak to 1200W / 1200W peak to 1500W / 2500W peak to 3200W)



PMR

(30mm Height (<1U) & Active PFC)
12V / 24V / 36V / 48V (150W / 240W / 320W / 600W)

Back-End Process



MEG-A

(Flexible Output Voltage & Communication)
700W / 1200W / 2100W / 3000W



PMR SMART (PMS)

(Compact Size & <1U & Current Sharing & Communication & Peak Power)
24V / 48V (750W peak to 1200W / 1200W peak to 1500W / 2500W peak to 3200W)



PMR

(30mm Height (<1U) & Active PFC)
12V / 24V / 36V / 48V (150W / 240W / 320W / 600W / 1000W / 1500W)


Rev.2024/Q1



DeltaPSU Website and Social Media

Our responsive homepage adapts to desktop PCs and mobile devices.

Simply visit psu.deltaww.com for all your product needs.

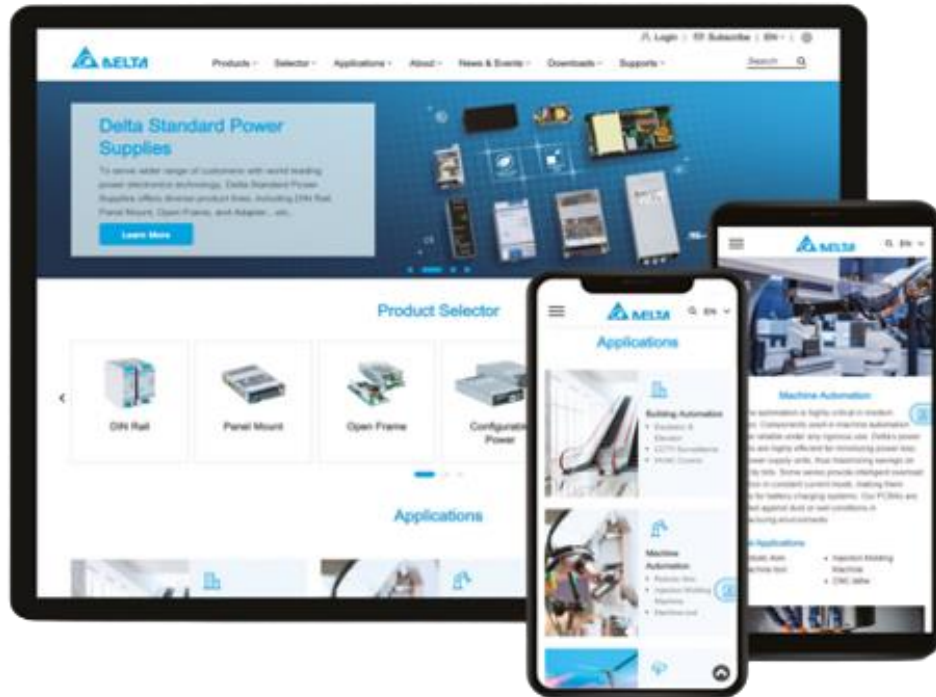

For more information, find us at :



LinkedIn

www.linkedin.com/company/deltapsu



YouTube

www.youtube.com/DeltaPowerSupplies



Facebook

www.facebook.com/DeltaPSU



WeChat

台达标准电源



Thanks.

Smarter. Greener. Together.

